

## **Historic, Archive Document**

Do not assume content reflects current scientific knowledge, policies, or practices.



*OK*



# PROCEDURES RECOMMENDED FOR OVERBURDEN AND HYDROLOGIC STUDIES OF SURFACE MINES

## Thunder Basin Project

U.S.D.A. FOREST SERVICE  
GENERAL TECHNICAL REPORT INT- 71  
INTERMOUNTAIN FOREST AND RANGE  
EXPERIMENT STATION  
FOREST SERVICE  
U.S. DEPARTMENT OF AGRICULTURE

This report is a result of the Federal Interagency Energy/  
Environment Research and Development Program  
administered by the U.S. Environmental Protection Agency.

The use of trade, firm, or corporation names in this publica-  
tion is for the information and convenience of the reader.  
Such use does not constitute an official endorsement or ap-  
proval by the U.S. Department of Agriculture of any product  
or service to the exclusion of others which may be suitable.

# **PROCEDURES RECOMMENDED FOR OVERBURDEN AND HYDROLOGIC STUDIES OF SURFACE MINES**

**James Barrett  
Paul C. Deutsch  
Frank G. Ethridge  
William T. Franklin  
Robert D. Heil  
David B. McWhorter  
Alv D. Youngberg**

**Technical Supervision  
Grant Davis**

INTERMOUNTAIN FOREST AND RANGE EXPERIMENT STATION  
Forest Service  
U.S. Department of Agriculture  
Ogden, Utah 84401

## THE AUTHORS

James Barrett attended the University of California at Davis where he received two bachelor of science degrees, in geology and engineering, (Sept. 1973). Funded by the Colorado Energy Research Institute, he received his master of science degree in engineering at Colorado State University (May 1979). While employed as a Civil Engineer for the California Department of Water Resources, he was program manager for the Sacramento Valley ground water modeling project. In addition, he was responsible for the design, installation, and testing of institutional water supply wells. As a ground water geologist with the Colorado Geological Survey, he was principal field investigator for the joint C.G.S.—U.S.G.S. Colorado Geothermal Resources Inventory. During this study, he conducted geologic mapping, hydrologic interpretation and geochemical analysis of the thermal areas. Most recently, as a graduate research assistant at Colorado State University he analyzed the hydrologic impacts of surface mining on the watershed.

Paul C. Deutsch received his bachelor of science degree in agronomy from Colorado State University in 1975. From 1975 to 1978 he served as a field soil scientist with the Soil Conservation Service, USDA. In 1978 he assumed his present position as a researcher in soil genesis morphology and classification at Colorado State University.

Frank G. Ethridge received his bachelor's degree in petroleum geology from Mississippi State University in 1960. Prior to serving in the U.S. Army Ordnance Corps for 3 years he worked as a geologist for the U.S. Army Engineers. In 1966 he received his master's degree in geology from Louisiana State University. From 1966 to 1967 he was employed as a production geologist for Chevron Oil Company in New Orleans, Louisiana. In 1970 he received a doctor's degree in geology from Texas A&M University. From 1970 to 1975 he was first an assistant professor and later an associate professor of geology at Southern Illinois University. Since 1975 he has been an associate professor of geology at Colorado State University, Fort Collins, Colorado. His research efforts during the last 9 years have been directed toward a better understanding of modern sediments and ancient sedimentary rocks and contained minerals and fuels.

William T. Franklin obtained a bachelor of science degree in soils from Montana State University, Bozeman, in 1952, received a master of science degree specializing in soil fertility from Washington State University, Pullman, in 1955, and was granted a Ph.D. degree specializing in soil chemistry and mineralogy from Oregon State University, Corvallis, in 1970. Franklin joined the Agronomy Department at Colorado State University in 1955 and served as project leader for a reclamation project in the San Luis Valley until 1962. Since 1964, after returning from sabbatical and educational leave of absence, he has taught graduate level courses in areas of soil salinity and water management and in soil mineralogy. Research experience during this time consisted of laboratory, greenhouse, and field studies of soil salinity, water quality, soil fertility and soil mineralogical problems.

## THE AUTHORS (Continued)

Robert D. Heil received his bachelor's degree in soil science from South Dakota State University in 1960. He obtained part of his undergraduate training at Dickinson State College, North Dakota. He completed his graduate degrees in soil science at South Dakota State University with part of his graduate work at Colorado State University. In 1965 he joined the Agronomy Department at Colorado State University as Extension Soil Testing and Fertility Specialist for the state of Colorado. In 1969 he spent one year sabbatical leave at the "Remote Sensing Institute" at Brookings, South Dakota. In 1970 he assumed his present assignment as soil survey research investigations leader and teaching in soil genesis, survey, and classification at Colorado State University.

David B. McWhorter is professor, agricultural and chemical engineering, at Colorado State University. He holds a professional degree in petroleum engineering from the Colorado School of Mines and the master of science and Ph.D. degrees in civil and agricultural engineering, respectively, from Colorado State University. His research and teaching activities deal with theoretical and applied aspects of flow in porous media. He has conducted several research projects related to problems of surface and subsurface water quality hydrology in surface mining, ground water hydraulics, and seepage from waste impoundments. He has served as a consultant to numerous governmental and private agencies on problems of flow and porous media and is the author of a text book on ground-water hydrology and hydraulics.

Alv Dan Youngberg graduated with a bachelor of science degree in forest management from the University of California in Berkeley in 1961. His master of science degree was obtained in botany and geology from Brigham Young University in 1966. He has also studied at Utah State University, San Jose State University, University of California at Davis, and the University of Nebraska. He has been employed as a forester for the Forest Service and a botanist for several universities. Since 1969 he has been employed as a geologist with the Oil and Gas Conservation Board of Alberta, Department of the Navy, and the Forest Service. He is presently employed by the Laramie Energy Technology Center, DOE. His geologic experience has been with petroleum, coal, uranium, oil shale, and groundwater.

## **RESEARCH SUMMARY**

This report outlines the kind of information required to evaluate the soils, overburden, and hydrology so that appropriate land management decisions can be made regarding the selection of mineral lease sites, the development of lease stipulations, and the formulation of mining and reclamation plans. In addition, cost effective procedures are presented for data acquisition and analysis associated with soils, overburden, and hydrologic studies.



# TABLE OF CONTENTS

Page

RATIONALE AND PROBLEM IDENTIFICATION . . . . .	1
DATA REQUIREMENTS AND COLLECTION PROCEDURES . . . . .	2
Sources of Existing Data . . . . .	2
General Sources of Data . . . . .	2
Unpublished Data Sources . . . . .	2
Computerized Data Banks . . . . .	2
Sources of Maps and Aerial Photographs . . . . .	3
Topographic maps . . . . .	3
Geology, Geophysics, and soil maps . . . . .	3
Aerial, photographs and spacecraft imagery . . . . .	4
Field Surveys . . . . .	4
Geologic Overburden . . . . .	4
Soil . . . . .	4
Definition of the soil . . . . .	4
Purpose of soil inventory . . . . .	5
Design of soil inventory . . . . .	5
Map scale and survey intensity . . . . .	5
Soil description procedures . . . . .	5
Soil mapping unit description procedures . . . . .	9
Soil classification and correlation . . . . .	9
Sampling . . . . .	11
Using existing soil and/or land inventory data . . . . .	11
Surface hydrology . . . . .	11
Location of surface water features . . . . .	13
Topographic relief of the area . . . . .	13
Areal distribution of soils and surficial geology . . . . .	13
Vegetation cover and distribution . . . . .	13
Magnitude and frequency of precipitation events . . . . .	13
Stream flow . . . . .	14
Sediment discharge measurement . . . . .	19
Drilling and Sampling Program . . . . .	19
Designing a Geologic Overburden and Hydrologic Sampling Program . . . . .	19
General . . . . .	19
Drill hole spacing and location . . . . .	20
Sampling intervals . . . . .	23
Hydrologic considerations . . . . .	24
Drilling and Sampling Methods . . . . .	25

## TABLE OF CONTENTS (Continued)

	Page
Drilling . . . . .	25
Sampling during drilling . . . . .	25
Using drilling fluids during sampling . . . . .	27
Prevention of borehole caving during sampling . . . . .	27
Sampling and rotary coring bits. . . . .	27
Suggested techniques to obtain a high percentage of core recovery in soft or poorly consolidated materials . . . . .	27
Sampling and coring techniques . . . . .	28
Well Completion . . . . .	28
Well construction . . . . .	28
Well casing. . . . .	29
Well screen and perforated casing . . . . .	29
Gravel packing. . . . .	32
Well sealing . . . . .	32
Well development . . . . .	33
Geophysical Logging Methods. . . . .	33
Subsurface Hydrologic Measurements . . . . .	33
Water surface elevation measurements. . . . .	33
Hydraulic coefficients of aquifers . . . . .	38
Pumping test . . . . .	40
Drawdown/specific capacity test. . . . .	40
Recovery test . . . . .	40
Pressure pump-in test . . . . .	41
Slug/falling head test. . . . .	41
Auger hole test . . . . .	42
Laboratory and Greenhouse Studies . . . . .	42
Soils and Geologic Overburden Characterization. . . . .	42
Stratigraphic framework . . . . .	42
Core descriptions—lithologic logs . . . . .	42
Stratigraphic studies . . . . .	42
Analyses of soils and overburden samples . . . . .	45
General . . . . .	45
Sample selection guidelines for chemical, mineralogical, textural, and physical analyses . . . . .	51
Ground Water and Surface Water Chemistry . . . . .	51
Surface water sampling . . . . .	51
Ground water sampling. . . . .	52

## TABLE OF CONTENTS (Continued)

	Page
Sampling frequency . . . . .	52
Sample preservation and constituent analyses . . . . .	53
Greenhouse Studies and Plant Tissue Analyses . . . . .	54
Field revegetation and stabilization studies . . . . .	55
Describing the component parts of the system which will affect the experiment . . . . .	55
Selection of experimental sites . . . . .	55
Variables to be studied . . . . .	55
Plot design. . . . .	56
Site protection . . . . .	56
DATA EVALUATION AND APPLICATION . . . . .	57
Geologic Overburden. . . . .	57
Soil and Overburden . . . . .	59
Field Inventory Data Application . . . . .	59
Laboratory Data Application . . . . .	59
Soil fertility relationships . . . . .	59
Soil salinity and sodium relationships . . . . .	60
Soil and geologic overburden textural relationships. . . . .	63
Mineralogical relationships . . . . .	66
Trace element toxicity relationships . . . . .	67
Soil erosion relationships. . . . .	68
Developing a soil and geologic overburden laboratory characterization program. . . . .	70
Interpretation and Application of Ground and Surface Water Data. . . . .	70
Surface and Ground Water Quality . . . . .	70
Piezometric Surface Maps and Fluctuations . . . . .	74
Analysis of aquifer test data . . . . .	74
Effects of boundary conditions and well construction on aquifer test results. . . . .	86
PUBLICATIONS CITED . . . . .	90
APPENDIX I — Sources of Geological, Hydrological, Soils, and Reclamation Data . . . . .	98
APPENDIX II — United States — State Geological Surveys and Bureaus of Mines for the Rocky Mountain Region . . . . .	101
APPENDIX III — Codes of Abbreviations and Symbols Used in Construction of Lithologic Log. . . . .	102
APPENDIX IV — Manufacturers and Distributors. . . . .	106

# LIST OF TABLES

Table	Page
1 Relationships of Soil Inventory Intensity and Level of Intensity at Which Map Unit Delineations are Recognized and Soils are Classified. . . . .	7
2 Some Minimum Map Scale and Observation Requirements for Land Classification as used by the U.S. Bureau of Reclamation in Determining Irrigated Land Suitability . . . . .	8
3 Sample Form for Soil Profile and Related Information. . . . .	10
4 Summary of Factors Important for Consideration in Soil Characterization and Sampling. . . . .	12
5 Discharge From Rectangular Weir with End Contractions. . . . .	15
6 Discharge from Triangular Notch Weirs with End Contractions. . . . .	16
7 Summary of Commonly Used Drilling Methods . . . . .	26
8 Effects of Sampling Methods on Results of Chemical Analysis of Overburden Samples (adapted from Power and Sandoval 1976). . . . .	28
9 Recommended Coring Bit Designs (Acker 1974) . . . . .	29
10 Summary of Sampling Techniques for Soils and Geologic Overburden . . . . .	30
11 Methods for Developing Water Wells . . . . .	32
12 Standard Down-hole Geophysical Logging Methods (modified after Dames and Moore, Vol. II, 1976, p. II-94 and II-95). . . . .	36
13 Summary of Aquifer Test Methods . . . . .	39
14 Analyses for Characterizing Soil and Overburden Samples . . . . .	49
15 Fertilizer Recommendations . . . . .	61
16 Suitability of Topsoil, Subsoil, and Overburden for Revegetation of Regraded Surface Mines Under Non-Irrigated Conditions in Arid and Semiarid Regions. . . . .	62
17 Generalized Rating of Factors Probably Needing Assessment in Surface Mine Reclamation as Affected by Texture of Soil or Overburden . . . . .	64
18 General Relationships of Occurrence and Availability of Trace Elements in Soil and/or Geologic Overburden . . . . .	69
19 Example of an Approach for Determining Interpretative Data Needs . . . . .	71
20 Values of $W(u)$ (From McWhorter and Sunada 1977). . . . .	78
21 Values of $H/H_0$ for a Well of Finite Diameter (after Cooper and others 1967) . . . . .	83
22 Rise of Water Level in Dawsonville Well after Simultaneous Withdrawal of Weighted Float ( $r=7.6$ cm). . . . .	83
23 Comparisons of Recharge and Boundary Effects on Semilog Diagrams. . . . .	87
24 Example of Lateral Inflow Computation. . . . .	88

# LIST OF FIGURES

Figure		Page
1	Schematic illustration of the relationship between soil and geologic overburden . . . . .	6
2	Parshall flume . . . . .	17
3	Estimating flow from horizontal or inclined pipes . . . . .	18
4	Successive steps in an exploration drilling program to detect, outline, and sample a disseminated copper-molybdenum sulfide deposit (From Peters, 1978, p. 444, after Bailey, P. A., 1968) . . . . .	21
5	Some of the more commonly used sampling designs . . . . .	22
6	Geophysical log curves from a coal field exploration drill hole showing correlation between various rock types and log shapes (From Jenkins, 1969 fig. 2, p. 11) . . . . .	34
7A	Characteristics of SP curves for various rock units (after Telford and others 1976, p. 785) . . . . .	35
7B	Typical gamma ray log curve for various rock units (after Telford and others 1976, p. 793) . . . . .	35
8	Example of format for lithologic logs . . . . .	43
9	Photograph of core from SEAM study site, Powder River Basin, Wyoming. .	44
10	Isopach map of strippable coal zone, Wyodak-Anderson coal deposit, showing thickness of coal with contour lines and patterns. Contour interval equals 25 ft (7.6 m) (after Keefer and Hadley, 1976, fig. 7, p. 10) . . . . .	45
11A	Stratigraphic cross-section between Dave Johnson Coal Field and Highland area, southern Powder River Basin, Wyoming. . . . .	46
11B	Fence diagram showing correlation and thickness of major coal seams, Campbell County, Wyoming. . . . .	47
12	Structure Contour Map drawn on base of Wyodak-Anderson coal, Gillette and vicinity. Contour interval is 50 ft (15 m); datum is mean sea level; hachures point toward areas of lower elevation . . . . .	48
13	Cross-section showing potential changes in topography resulting from surface mining in the Gillette area, Wyoming. Lower section is based on assumption that overburden is replaced on a cut-by-cut basis with 200 ft wide (60 m wide) cuts, spoils are smoothly graded, highwalls are graded to a 3:1 slope, and overburden expands 20 percent . . . . .	58
14	Piezometric surface of overburden aquifer in October, 1978. . . . .	75
15	Water table fluctuation recordings. . . . .	76
16	Matching the type curve with drawdown data. . . . .	79

## LIST OF FIGURES (Continued)

Figure		Page
17	Example of the Jacob method for determining aquifer properties. . . . .	80
18	Water levels in a recovery test . . . . .	81
19	Response to a slug injection . . . . .	82
20	Plot of data from test at Dawsonville, Georgia, superimposed on type curve (After Cooper and others 1967). . . . .	83
21	Time lag plot. . . . .	84
22	Example of the determination of $H_0$ . . . . .	84
23	Curves relating coefficients A, B, and C to $L/r_w$ . . . . .	85
24	Geometry and symbols of a partially penetrating, partially perforated well in unconfined aquifer with gravel pack or developed zone around perforated section . . . . .	85
25	Effects of boundaries on drawdown vs time. . . . .	86
26	Effects of boundaries on drawdown vs distance. . . . .	87

# RATIONALE AND PROBLEM IDENTIFICATION

Thorough analysis and planning for reclamation of lands disturbed by surface mining and for the control and mitigation of potential water quality degradation can preserve the long-term productivity of the land and the integrity of the water resources without undue hindrance to the development of mineral resources. This goal can be achieved through evaluation of the characteristics and interrelationships of soils, overburden, surface water, and ground water; thereby permitting rational assessment of alternatives for exploration, mining, and reclamation activities.

This project was a part of the 17-agency Federal Energy/Environment Research and Development Program. It was partially funded by the Surface Environment and Mining Program (SEAM) of the USDA Forest Service and by the U.S. Environmental Protection Agency to develop recommendations and criteria for the study of soils, overburden, and hydrology at surface mining sites. Two basic goals were established for the project:

1. Determine the kinds of information required to evaluate the soils, overburden, and hydrology so that appropriate land management decisions can be made relative to the selection of lease sites, development of lease stipulations, and formulation of mining and reclamation plans.

2. Recommend cost effective procedures for data acquisition and analysis associated with soils, overburden, and hydrologic studies.

The objectives are achieved by defining soils, overburden, and hydrologic information requirements and by evaluating and prioritizing

alternative approaches to sampling and analysis where possible. The purpose is to assist in making leasing, mining, and reclamation decisions that give due consideration to surface stability, soil and overburden fertility, occurrence and distribution of toxic materials, surface and ground water quality and quantity, and future land and water uses. The information requirements and procedures for analysis are derived with the recognition that the chemical, mineralogical, and textural characteristics of soils and overburden affect fertility, stability, weathering (weatherability), erosion, water quality, runoff, and recharge. Also, the data needs that were developed reflect the requirement that the relationships among topography, geology, climate, vegetation, surface water, ground water, water quality, and water use must be adequately understood.

This handbook has been prepared as a result of the SEAM study. No attempt was made to identify all available technology and information available for the study of soils, overburden, and hydrology; but rather to recommend proven methods and procedures that are known to give good results. References are cited so that the reader can obtain more detailed information when desired.

The Final Report of the SEAM Thunder Basin Project summarizes an evaluation of site-specific data on a study site in Campbell County, Wyoming. This report includes an evaluation of data on geology, mineralogy, texture and geochemistry of overburden, discussion of plant growth studies, and surface and ground water hydrology.

# DATA REQUIREMENTS AND COLLECTION PROCEDURES

## Sources of Existing Data

### GENERAL SOURCES OF DATA

From a mining company standpoint, the information required for a literature review must include knowledge of the various disciplines which influence property evaluation. For an initial literature review the available data in the following areas should be examined: (a) geology, (b) hydrology, (c) soil science, (d) environmental science, (e) legal, and (f) mining. Such data can be extracted from a number of sources including government agencies, technical journals and books, university publications, and private sources. Sources of information in the areas, excluding legal and mining, will be covered in detail below.

Appendix I is a list of sources for geological, hydrological, soils, and reclamation data. This list is modified extensively from Peters (1978). Most of the sources can be found in university libraries and all of the geological references are available in the United States Geological Survey (USGS) Library in Denver, Colorado. Perhaps the best general source for geological information is the book by Wood (1973). The best overall source of information on the collection of subsurface data and the analysis of subsurface samples is LeRoy and others (1977). State geological surveys and/or bureaus of mines should always be consulted at an early stage for geological information on a particular local area. A list of state geological surveys in the Rocky Mountain Region is included as appendix II.

## UNPUBLISHED DATA SOURCES

Most Federal and State bureaus of mines and geological surveys, State regulatory agencies, industry clearinghouses, regional research organizations, and private consulting firms have preliminary reports, project files, and raw numerical data on file. Open file reports of the U.S. Geological Survey and the U.S. Department of Energy are available for public inspection. Copies of these reports can often be obtained for the cost of photocopying.

Detailed unpublished material on conservation and management practices are available at local Soil Conservation Service offices. Also available are lists of important and prime farmland that may occur in each county or planning unit.

The Forest Service and Bureau of Land Management have management plans which contain information on existing resources within certain management units of public lands. This information is available for public inspection.

## COMPUTERIZED DATA BANKS

As the wealth of knowledge in various scientific disciplines becomes greater, there is an ever-increasing need for computerized data banks to handle storage and retrieval of this information. Some of the more important geological data banks are given below:

RASS, Rock Analysis Storage System. Used within the U.S. Geological Survey. Files not available to the public,



but some data are released on magnetic tape. Washington, D.C.

SSIE, Smithsonian Science Information Exchange. Information on research in progress. Washington, Smithsonian Institution.

CRIB, Computerized Resources Information Bank. Used within the U.S. Geological Survey, Washington, D.C.

DATRIX, Direct Access to Reference Information, Theses and Dissertations. University of Michigan, Ann Arbor, Michigan.

Geo-Archives. London, Geosystems (Lea Associates Ltd.).

GEODAT, numerical results produced by laboratories in the Geological Survey of Canada. Chemical, spectrographic, and age data. Available to users in the private sector. Geological Survey of Canada, Ottawa.

Geo Ref, a geoscience-oriented service provided by the American Geological Institute and the Geological Society of America; files date from 1966.

GRASP, Geological Retrieval and Synopsis Program. Used within the U.S. Geological Survey, Washington, D.C.

## SOURCES OF MAPS AND AERIAL PHOTOGRAPHS

### Topographic Maps

About 90 percent of the United States is covered by 1:62,500 (15-minute quadrangle) to 1:24,000 (7-½-minute quadrangle) topographic mapping. Indexes to topographic mapping in each state are published quarterly by the U.S. Geological Survey. These and the topographic maps are obtainable by mail from the U.S. Geological Survey offices in Denver, Colorado, for the Western States. Copies of U.S. Geological Survey topographic maps and advance prints of preliminary quadrangle maps are also available (although not by mail) from district U.S. Geological Survey offices and from State geological surveys and bureaus of mines at the addresses shown by Wood (1973), and Ward and Wheeler (1972).

### Geology, Geophysics, and Soil Maps

Government geologic mapping in the United States covers most of the country at a scale of 1:500,000 (state maps), about 40 percent of the country at a scale 1:250,000, and about 25 percent of the country at 1:62,500 to 1:24,000. Unlike topographic mapping, some of the geologic mapping has been done by the State geologic surveys. In addition, some areas have been mapped for universities by candidates for advanced degrees. Even though the maps are scattered through Federal, State, and scientific association publications, most states have an updated index to geologic mapping compiled by the U.S. Geological Survey or by the State bureau of mines. Special map series produced by the USGS include:

Coal Investigation Maps.

Geologic Quadrangle Maps. This series is a continuation of the Geologic Folios published between 1894 and 1946.

Geophysical Investigations Maps. This series includes aeromagnetic and radiographic maps at 1:62,500 and 1:24,000 scale.

Hydrologic Investigations Maps.

Mineral Investigations Field Studies Maps. This series includes preliminary tectonic, metallogenic, mineral deposits, and geological maps.

Mineral Investigations Resource Maps. These are mineral deposit maps.

Miscellaneous Geological Investigation Maps. This series includes photogeologic maps, and paleotectonic maps.

Oil and Gas Investigations Maps.

Detailed soil inventories conducted by the Soil Conservation Service, Bureau of Land Management, and the Forest Service are available for certain areas throughout the Western United States. Information is available at these agencies' State or regional offices. State general soil maps with scales of about 1:500,000 and county general soil maps and prime farmland maps with scales of 1:100,000 to 1:250,000 are, or will be available from the Soil Conservation Service in each Western State.

## **Aerial Photographs and Spacecraft Imagery**

Aerial photography coverage in the United States is shown on the U.S. Geological Survey quarterly indexes to topographic mapping for each state. Smaller scale indices to aerial photography coverage of the entire country are also published from time to time. Indices and advice on coverage by government agencies for specific areas can be obtained from the National Cartographic Information Center, U.S. Geological Survey, National Center (STOP 507), Reston, Virginia 22092.

The U.S. Geological Survey EROS Data Center, Sioux Falls, South Dakota 57198, is the source for copies of geological survey aerial photographs, NASA photography and imagery, LANDSAT Imagery, and Skylab photography and imagery. (The abbreviations here are: EROS = Earth Resources Observation Systems; NASA = National Aeronautics and Space Administration; and LANDSAT = the former ERTS, Earth Resources Technology Satellite.) Satellite imagery is available on magnetic tape and in photographic form. Standard catalogs and film strips as well as transparencies, paper prints, enlargements, and state image maps are available. A geographic search and inquiry system provides free information on specific photographic coverage. EROS application assistance facilities and data reference files are located at more than a dozen offices throughout the United States.

LANDSAT mapping programs have been completed for several states. Included among these is the LANDSAT mapping program for North Dakota completed by the North Dakota Regional Environmental Assessment Program (NDREAP).

## **Field Surveys**

### **GEOLOGIC OVERBURDEN**

The primary objectives of field reconnaissance are to verify the existing data and to seek out new field data that might have been overlooked by previous workers.

The verification of existing data is accomplished by aerial photographic interpretation and by field examination of outcrops, roadcuts, active and/or abandoned mine workings, and stored cores and geophysical logs. Access to mines and private property may be restricted. Considerable advanced planning is usually required to obtain access to these properties. No new drilling or test pit work is undertaken during these surveys. The final products of a field survey will probably constitute detailed geologic and topographic maps of the proposed mine area at an appropriate scale. Other information plotted on surface maps will include borehole and pit locations, access routes, and surface drainage.

## **SOIL**

### **Definition of the Soil**

Basic to determining the kind and intensity of inventories necessary to provide information needed by planners and resource managers involved in reclamation planning, is a definition of the resource being inventoried. "Soil," as conceived by some, consists of the unconsolidated materials found near the earth's surface. The schematic soil profile shown in fig. 1 reflects the concept of soil as it is considered in this report. This diagram illustrates that chemical, biological, and physical processes give rise to soil layers that are significantly different in terms of their chemical, physical, and biological properties. These differences in basic properties in turn affect other characteristics such as plant nutrient status, available water capacity, erodibility, infiltration, and permeability properties which are very important in assessing the opportunities and/or constraints that soils offer in developing management alternatives for reclaiming a tract of land which will be disturbed by mining activity.

Using this concept of soils, this approach ensures greater reliability for separating natural soil bodies into groups which are different, and prevents mixing or grouping of unlike soils and allows for maximum utilization of existing soil data. Separation into genetic horizons is extremely critical in sampling for laboratory analyses.

## Purpose of Soil Inventory

The purpose of a soil inventory is to provide answers to the following questions:

1. What land capabilities exist at the present time? Prime, important, and unique farmlands need to be identified along with the agricultural productivity potential of the area.

2. What opportunities and/or constraints do soils offer, based on availability of materials, for developing management alternatives for reclaiming a tract of land to be disturbed by surface mining?

In order to answer these questions, it follows that the soil inventory must identify:

1. The different kinds of soils that occur, based on physical, chemical, and depth characteristics as well as other features which affect use such as slope, stoniness, etc., and

2. The area extent and distribution of soils as exhibited on a soil map.

The discussion that follows provides information that can be used for determining the kind and intensity of soil inventory that would provide land managers, planners, and mine operators with the kind of soil information needed in developing a reclamation plan.

## Design of Soil Inventory

The design of a soil inventory program should consider the following factors:

1. Map scale and survey intensity,
2. Soil description procedures,
3. Soil mapping unit description procedures,
4. Soil classification and correlation,
5. Sampling.

### *Map Scale and Intensity*


Information shown in table 1 summarizes the relationships between soil inventory intensity and level of detail at which "map unit delineations"

are recognized and soils are classified. The information shown is a general guideline used by the Soil Conservation Service in planning for soil inventory intensity. Information shown in table 2 shows similar guidelines as developed and used by the U.S. Bureau of Reclamation for making irrigation suitability inventories. Perhaps the most important factors as shown in the two tables are the "size of area" that is delineated on a map as a function of scale and the level of abstraction at which soils and/or land information is defined. Except for using the equivalent of an Order 3 (table 1) type inventory for general planning, it appears that an inventory equivalent to Order 1 or 2 is necessary if all soil data needed in developing mined land reclamation planning is to be identified. The planner or land manager must decide on the intensity of the inventory needed based on the desired level of planning, i.e., the level of detail needed for a "prospecting phase" vs "reclamation phase."

### *Soil Description Procedures*

Purpose. Soil profile descriptions are useful for identifying changes with depth in terms of soil texture, structure, presence, or absence of calcium carbonate, color, and thickness of individual soil layers or horizons. These characteristics are important for determining sampling needs as well as for planning a "topsoil stockpiling program." The form shown in table 3 could be used in describing soil profiles. The form allows for collecting site related information in addition to soil characteristics. The purpose of this is to allow for coordination of soil data with other resource data collected. This maximizes the credibility of interpretations that are made from the data. Procedures for describing soil profiles can be found in "Soil Taxonomy" (Soil Survey Staff 1975) and "Soil Survey Manual" (Soil Survey Staff 1951).

Using the above approach provides a basis for identifying the different kinds of soils found on a tract of land, aids in separating soil horizons for the purpose of stockpiling for future reclamation and sampling for laboratory analyses and provides basic data needed for classifying the soils.

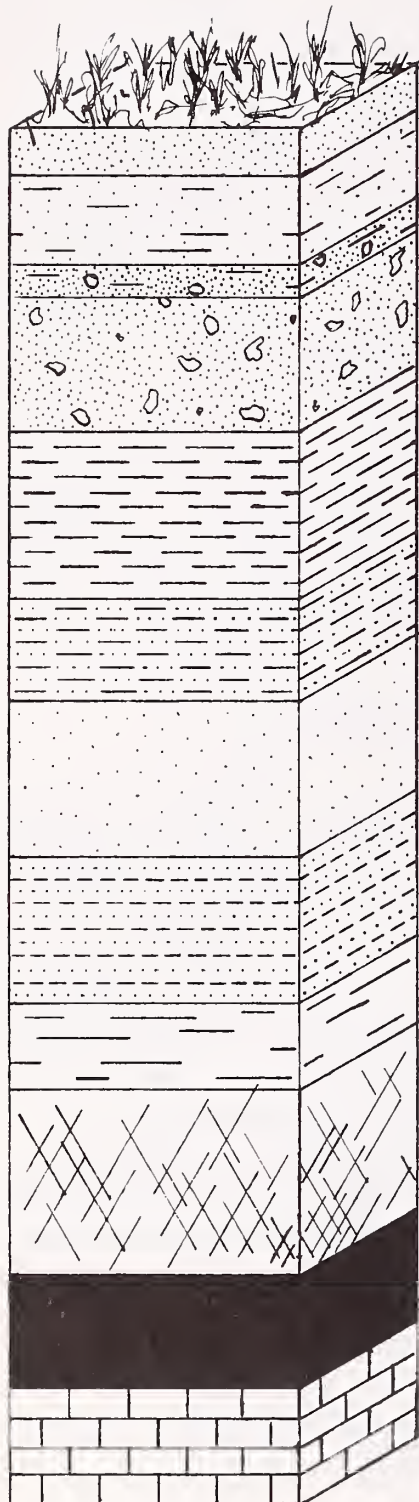

A Horizon

B Horizon

C Horizon

Soil Solum

Upper part of C Horizon may be different from lower part as a result of soil forming processes.

Geologic overburden will vary according to conditions under which materials were deposited.

Although all materials overlying coal or extractable mineral seam can be considered as overburden, it is important to remember that the soil solum as shown and the C horizon to some extent have been modified significantly by chemical, physical, biological and translocation processes which in turn has resulted in layers near the surface which are significantly different in terms of organic matter, plant nutrients, salinity, color, and textural properties.

Figure 1. Schematic illustration of the relationship between soil and geologic overburden.

**Table 1. — Relationships of soil inventory intensity and level of intensity at which map unit delineations are recognized and soils are classified**

	Order 1	Order 2	Order 3	Order 4	Order 5
Taxonomic classification	series	series	families and series	families and subgroups	subgroups, great groups, suborders, and orders
Map unit	phases of soil series	phases of soil series	phases of soil series and soil families	associations with some consociations	associations
Map scale needed	1:12,000 and larger	1:12,000 to 1:31,680	1:24,000 to 1:250,000	1:100,000 to 1:300,000	1:250,000 to 1:1,000,000
Smallest unit mapped	less than 1.5 acres	1.5-10 acres	6-640 acres	100-1,000 acres	640-10,000 acres
Percent dissimilar inclusions	less than 10 percent	less than 20 percent	less than 30 percent	not set in advance	not set in advance
Accepted uses	experimental plots and individual home sites ... the nearest survey intensity to being site specific	planning of moderately intensively used management units, based on predictions of the suitabilities and soils response to management	planning for extensive uses of land such as rangeland, watershed management, woodland, and extensive kinds of cropland...county, multicounty, or watershed planning	regional planning within multicounty or multistate areas or larger watersheds ... used to locate areas having potential for 2nd order survey and for site management planning	used for broadest kinds of planning for states or nations ... accurate identification of most important soils and reasonable estimates of their extent
Field methods	Identification of soils of each delineation by direct examination of all boundaries throughout their lengths. Sampling plan of grid applied at random, in addition to soil examinations at places dictated by surface features that may mark soil differences. Laboratory determinations on samples collected at selected places to verify or augment field observations.	Identification of soils by transecting and transversing. Soil boundaries are plotted by observation and interpretation of remotely sensed data. Boundaries are verified at closely spaced intervals.	Soils in each delineation are identified by transecting and transversing and some observation. Boundaries are plotted by observation and interpretation by remotely sensed data and verified with some observations.	The soils of delineation representative of each map unit are identified and their patterns and composition determined by transecting. Subsequent delineations are mapped by transversing, by some observation, and by interpretation of remotely sensed data verified by occasional observations. Boundaries are plotted by air photo interpretations.	The soils, their patterns, and their composition for each map unit are identified through mapping selected areas (15 to 25 mi <sup>2</sup> ) with 1st or 2nd order surveys, or alternatively, by transecting. Subsequently, mapping is by widely spaced observations, or by interpretation of remotely sensed data with occasional verification by observation or transversing.

**Table 2. — Some minimum map scale and observation requirements for land classification as used by the U.S. Bureau of Reclamation in determining irrigated land suitability**

<b>Specification</b>	<b>Reconnaissance map</b>	<b>Semi-detailed map</b>	<b>Detailed map</b>
Scale of base maps	1:24,000	1:12,000	1:4,800
Land classes recognized	1,2,3,6	1,2,3,6	1,2,3,4,5,6
Maximum distances between traverses (miles)	1.00	0.50	0.25
Accuracy (percent)	75	90	97
Field progress per day for one land classifier and crew (square miles)	3.00-5.00	1.00-3.00	0.25-1.00
Minimum soil borings or pits per square mile (5 ft deep)	1	4	16
Minimum number of deep substrata holes per township (10 ft deep or more)	1	2	4

Source: U.S. Bureau of Reclamation, 1953.

Detailed land classification (Bureau of Reclamation, 1953) is generally done at a map scale of 1:4,800 (400 feet to the inch) to provide adequate information as to the extent and character of the various lands in each 40-acre tract. A smaller scale, not less than 1:12,000, may be used on fully developed areas or on highly uniform new land areas where no specific problems are associated with soils, topography, or drainage and none are anticipated. Base maps at scales of 1:24,000 are considered only for reconnaissance studies by the Bureau, and are used for preliminary elevations and for drainage basin studies (e.g., runoff, conservation) of areas not to be irrigated, but within the general project area. Results of soil profile examinations and laboratory analyses are also put on the map where appropriate. Field surveys are generally supplemented with extensive laboratory analyses, greenhouse studies, and field experimental plot data to obtain as much information as is needed before the irrigation project is implemented. Reports summarizing the data accompany the maps at the various scales. Although the Bureau of Reclamation's irrigation suitability classification sets up specific limits for classes and subclasses, the specifications are not absolutely rigid, and can be modified from one project area to another (Olsen 1974).

## *Soil Mapping Unit Description*

**Purpose.** A soil mapping unit describes the three-dimensional properties of the soil or soils that make up a soil mapping chart, soil topography relationships, and other soil related features that occur on the landscape. The mapping unit becomes the basic unit from which management plans are developed, thus it needs to be accurately defined. Factors that should be included within the description include:

1. Soil composition, i.e., homogeneity of unit;
2. Degree and configuration of slope on which unit occurs;
3. Existing or potential erosion characteristics;
4. Brief description of the physical characteristics of the soils; such as, texture, structure, drainage, depth, permeability, infiltration, and any chemical characteristics;
5. Identity of native vegetation or type of crop; and
6. Identity of water table relationships if present.

Following are definitions of types of soil mapping units as developed by the Soil Conservation Service, USDA (Soil Survey Staff 1975).

**Consociations.** — These are mapping units in which only one kind of soil dominates each delineation to the extent that three-fourths or more of the soils fit within the criteria defined for the soil that provides the name for the mapping unit. No one contrasting inclusion may constitute more than 10 percent of the unit and the aggregate of all contrasting inclusions may not exceed 15 percent.

**Complexes.** — These are sets of delineated soil areas with two or more important components in such an intricate geographical pattern that they cannot be mapped separately at a scale of 1:20,000. The component kinds of soil that provide the name for the mapping unit have sufficiently different use or management requirements for the purposes of the survey that the unit cannot be named as a consociation. Interpretations may be made for the complex as a whole, determined by the overriding limitation of any

one or a combination of components and the pattern of components. No single inclusion that is dissimilar to any one of the soils providing the name for the mapping unit may exceed 10 percent of the whole and the aggregate of these not more than 25 percent.

**Associations.** — These are sets of delineated areas in which two or more important kinds of soil or soils and kinds of miscellaneous areas are found in some regular pattern and are individually large enough to be mapped separately at a scale of about 1:20,000. Each delineated body of a soil association has the same major components, and potentials for use and management of the individual areas are about the same. As the intensity of the survey decreases, however, i.e., Order 4 vs Order 3, the relative proportions and distribution of soil components may vary considerably both within the same occurrence and among occurrences of the same association. This is particularly true for older surveys. Thus, the potentials for use and management of the units may vary.

**Undifferentiated groups.** — These are delineated areas in which two or more similar soils are combined because some phase criteria determines use and management interpretations for the purpose of the survey. The major components are large enough to be separated at the scale of mapping and have no regular pattern. Every delineation has at least one of the major components and may have all. Each of the components need not occur in every delineation, however.

In summary, the purity and homogeneity of mapping units is a function of the level of intensity or detail of a soil inventory. Land managers and planners need to be aware of this fact when using and planning for soil inventories. This is a very important item, because the information contained within a mapping unit description is the basis for making decisions on land management units.

## *Soil Classification and Correlation*

There has been in the past and continues to be disagreement relative to classifying soils by various classification schemes. Most notably, questions are raised regarding the taxonomic

**Table 3. – Sample form for soil profile and related information**

Soil Type or Designation:

File No.

Date		Stop No.
Classification		
Location		
		Climate
Parent material		
Physiography		
	Drainage	Salt or alkali
Elevation	Gr. water	Stoniness
Slope	Moisture	
Aspect	Root distrib.	
Erosion: Type	Degree:	
Native vegetation (or crop)		

Additional notes

Horizon	Depth	Color			Texture	Structure	Consistence			Reaction	Boundary	Percent Coarse Fragments >2 mm.
		Dry	Moist				Dry	Moist	Wet			
			non-crushed	crushed								



classification of soils. The soil survey work of the Department of Agriculture is conducted cooperatively with State agencies, other Federal agencies, and with local organizations and groups. These joint efforts collectively are referred to as the National Cooperative Soil Survey. The Soil Conservation Service has leadership responsibilities for the Federal part of these soil surveys. The Soil Taxonomy Handbook Survey (Soil Survey Staff 1975) is the basis for all classification in the National Cooperative Soil Survey. Major considerations for classifying soils taxonomically and/or by interpretive classifications can be described as follows:

1. In order to utilize existing soil characterization and interpretive data, soils must be classified according to systems that have been used in assembling and storing data that has been collected in the past. If existing acceptable soil taxonomic and/or interpretive classification systems are utilized then it is possible to retrieve and utilize existing information in making interpretations.

2. Classification and correlation of soils allows for this information to become part of a soil data bank that can provide information for future utilization by others in other geographic areas. Through time, this will not only begin to decrease the amount of effort in data analysis, but will aid in improving the reliability of interpretations. Soil classification, by either taxonomic or interpretive classification systems, is the key mechanism for knowledge assimilation and transfer.

### *Sampling*

Information relative to considerations that should be kept in mind in sampling for analysis and classification of soil resources is shown in table 4.

### *Using Existing Soil and/or Land Inventory Data*

Soil and land inventories have been carried out by a number of agencies for a number of years. For example, soil surveys made as early as the 1920's are available for some parts of the Western United States.

The purpose of this section is to develop an awareness of the fact that past and existing soil and land inventories have been carried out at different scales of study and/or according to different concepts. This has resulted in soil and land inventory data that in some cases, is applicable to making interpretations for many uses, and in other cases are applicable to a particular use of level of planning. Add to this the fact that soil and land classification procedures and concepts have changed through time even within an agency, and we have a situation where it is critical that existing inventory data needs to be carefully evaluated for its credibility and reliability. Therefore, it is important to determine the intended purpose and concepts of the Survey from the people or agency that conducts it.

If this is not done, the result is that the user may ultimately decide that the inventory is of no value, when in fact it may be useful if properly interpreted by someone familiar with it.

## **SURFACE HYDROLOGY**

Surface water hydrology investigations are undertaken to determine the location, magnitude, and movement of surface water in an area so that a water balance or budget can be developed. The water budget is an attempt to integrate the components of the hydrologic system (ground water, surface water, atmosphere, and soil) into a physical model. This model is used to estimate the system response to land surface modification brought about by surface mining. Other objectives of a surface water investigation are to determine the surface water quality and quantity, its social and economic importance, and its potential impact on the resource and its users.

To achieve these objectives the following information is needed:

1. Detailed location of all surface water features,
2. Topographic relief of the area,
3. Aerial distribution of soils and surficial geology,
4. Vegetation cover and distribution,
5. Magnitude and frequency of precipitation events,

**Table 4. — Summary of factors important for consideration in soil characterization and sampling**

Determining need:	Samples for laboratory characterization and classification.
Selecting a location:	Duplicate and/or paired profiles should be identified for each of the different soils which occur on a tract of land. Sampling paired profiles minimizes the chance of error. Sites should be representative of the soil in question and located within a mapping unit representative of the soil. Site should also reflect dominant land use.
Sampling procedures:	<p>Bulk samples for laboratory analysis and classification should be taken from each genetic horizon. (A, B &amp; C horizons). Estimates and/or measurements should be made of the amount (by volume) of coarse fragments present. Material sampled for laboratory characterization should include mainly the fine earth fraction i.e., &lt;2 mm. Approximately 5 to 8 lbs. of material is needed for laboratory characterization. Material collected for classification and correlation purposes should include natural aggregates and the amount necessary is normally less than ½ lb. Clod samples can be taken if bulk density and/or mineralogical analyses are to be performed.</p> <p>Samples should be obtained from an open pit. Depth of sampling should be to 60 inches or depth of bedrock if bedrock occurs at &lt;60 inches. Sampling should start with the lowest layer in the pit and proceed upward.</p> <p>Samples of surface soil should include a composite of a number of samples taken from within a mapping unit as well as from the surface material sampled from pits. This will provide an estimate of the mean of the surface soil conditions of the area. A rule of thumb is that one composite sample should not represent an area more than 40 to 80 acres in size. An average of 10 to 15 subsamples per 40 acres should be taken depending on how variable the area may be.</p>
Special considerations:	<p>If NO<sub>3</sub>-N is to be determined, samples should be air dried as soon as possible after sampling. Otherwise, the NO<sub>3</sub>-N determination more than likely will not reflect existing levels in the soil.</p> <p>Samples taken for heavy metals or micronutrient analyses should be protected from contamination. Rusty tools, galvanized or brass containers should not be used. Brown paper sacks should not be used if boron is to be determined. Plastic bags are most desirable for use.</p> <p>Samples taken for classification and correlation should be separated at time of sampling.</p>

6. Stream flow,
7. Sediment discharge.

A brief discussion of each of these data needs follows.

## **Location of Surface Water Features**

Surface water features include all wet or dry creeks, gullies, ditches, rivers, ponds, lakes, etc. These features should be plotted on 7-½ minute topographic maps (scale 1:24,000). From these plots, determinations of the surface water flow directions, proximity of surface water features to proposed construction sites and appurtenances, and the drainage system morphology can be made. In arid and semiarid regions, surface water bodies often constitute the major source of subsurface recharge. Federal regulations require that recharge on postmining lands be essentially the same as during premining. Thus, it is important that all surface water features be identified and their relationship to subsurface recharge be understood.

The drainage system morphology can provide qualitative insights to the stratigraphy and geologic structure of the area as well as channel response to various precipitation events (Zernitz 1932). Schumm (1977) states that drainage density (the sum of channel lengths per unit area) is proportional to the sediment yield and mean annual runoff. In other words, when subjected to an equivalent precipitation event, areas of dense channel development (common in arid regions) will have higher sediment yields, and greater peak discharge rates than sparsely channeled regions. Drainage density can also be related to the areal infiltration capacity of the ground surface. Low infiltration areas tend to have high drainage densities whereas high infiltration capacity soils tend to have lower drainage densities (Schumm 1977).

## **Topographic Relief of the Study Area**

USGS 7-½ minute topographic quadrangle maps are the best source of relief information. For a given precipitation event, peak runoff rates, sediment transport, and erosion rates are

proportional to relief; base flow rates, and rainfall-runoff ratios are inversely proportional to relief.

## **Areal Distribution of Soils and Surficial Geology**

This information may be obtained from geology and soils maps or by field reconnaissance. The following qualitative relationships can be evaluated from geology and soils information:

1. Structural control of the drainage system.
2. High drainage densities are associated with easily erodible materials (Schumm 1977).
3. Low drainage densities are associated with permeable materials (Schumm 1977).
4. High erosion rates and sediment yields exist in areas of easily erodible materials.

In addition, knowledge of the distribution of permeable materials may aid the location of potential ground water recharge areas.

## **Vegetation Cover and Distribution**

Vegetation density may provide insights as to the climate of the area, that is, the magnitude and frequency of precipitation events and drainage system response. In general, sparsely vegetated areas may be indicative of arid climate conditions with high peak flow rates and sediment yields. Densely vegetated areas retard runoff velocities thus reducing sediment yields and peak flow rates while increasing base flow.

## **Magnitude and Frequency of Precipitation Events**

Channel morphology, relief, and vegetation cover, reflect the nature of precipitation over a given area. Arid areas exhibit high relief, rugged topography, and sparse vegetation generally representative of infrequent, torrential precipitation events. On the other hand, humid areas tend to have gentle topography and dense vegetation representative of many moderate precipi-

tation events. In general, sediment load and erosion rates are higher in arid areas than in humid areas. Areas of infrequent, intense storms may have drastic fluctuations of surface water quality in response to the change in flow rate. Areas with extreme discharge and water quality fluctuations require higher monitoring frequencies in order to accurately monitor the hydrologic system. Obviously, higher sampling frequencies lead to greater monitoring costs.

## Stream Flow

Stream flow can be determined by the use of chutes, weirs, flumes, horizontal pipes, and velocity measurements; a detailed discussion of these methods follows.

*Chutes.* — A chute is a steep channel of such high gradient that uniform flow takes place at less than the critical depth (Metcalf and Eddy, Inc. 1972). Flow in chutes is determined by Manning's equation:

$$V = \frac{1.486}{n} R^{2/3} S^{1/2}$$

where:

- V = flow velocity (ft/sec)
- S = slope of water surface (ft/ft)
- n = Manning's roughness factor
- R = hydraulic radius.

Once the flow velocity is determined, discharge is calculated by  $Q = VA$  where A = cross-sectional flow area (width x depth).

*Weirs.* — Weirs are a very accurate means of flow measurement. This discussion deals with three common weir types; rectangular, triangular, and trapezoidal. The following conditions must be met in order to achieve accurate flow measurements (Albertson and others 1960):

1. The weir plate must be vertical with a smooth upstream face.
2. The crest must be horizontal and perpendicular to the flow direction.
3. The crest should be fairly sharp and free of dents or bends.
4. The channel should be straight with uniform cross-section upstream and downstream of the weir location.

5. The sides of the channel should be smooth and vertical.

Flow over a rectangular weir can be determined from table 5 or by the following equation (Albertson 1960):

$$Q = (3.22 + 0.4 h/p) (L - 0.003) (h + 0.003)^{3/2}$$

where:

- h = head on the weir (ft)
- L = length of the weir crest (ft)
- p = height of the weir (ft)
- Q = discharge (ft<sup>3</sup>/min).

The triangular weir is useful for channels with the wide variations in discharge. Flow over triangular weirs can be determined from table 6 or with the following equation (Albertson and others 1960):

$$Q = 2.5 h^{5/2} \text{ (for right-angle notch only)}$$

where:

- h = upstream water surface height above the weir crest (ft)
- Q = discharge (ft<sup>3</sup>/min).

Flow over a trapezoidal weir is given by (Metcalf and Eddy, Inc. 1972):

$$Q = 2/3 \sqrt{2g} L H^{3/2} + 8/15 Z \sqrt{2g} H^{5/2}$$


where:

- g = gravitational acceleration (32.2 ft/sec<sup>2</sup>)
- L = length of weir crest (ft)
- H =  $V^2/2g + h$
- V = flow velocity over weir crest (ft/sec)
- h = upstream water surface height above weir crest (ft)
- Z = slope of the side contractions.

*Flumes.* — Flumes are advantageous over weirs and chutes because they yield accurate flow measurements and can be portable. Although installation is simple, the following conditions must be met to insure accurate measurements (Albertson and others 1960):

- a. The flume must be set at the proper elevation in the channel so that backwater or drawdown conditions are not created.

**Table 5. — Discharge from rectangular weir with end contractions**

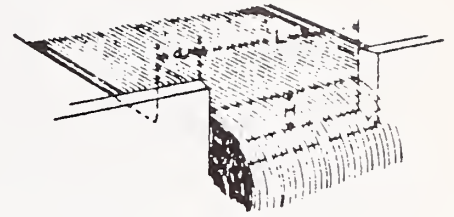

Figures in table are in gallons per minute								
Head (H) in inches	Length (L) of weir in feet				Head (H) in inches	Length (L) of weir in feet		
	1	3	5	Additional g.p.m. for each ft over 5 ft		3	5	Additional g.p.m. for each ft over 5 ft
1	35.4	107.5	179.8	36.05	8	2338	3956	814
1¼	49.5	150.4	250.4	50.4	8¼	2442	4140	850
1½	64.9	197	329.5	66.2	8½	2540	4312	890
1¾	81	248	415	83.5	8¾	2656	4511	929
2	98.5	302	506	102	9	2765	4699	970
2¼	117	361	605	122	9¼	2876	4899	1011
2½	136.2	422	706	143	9½	2985	5098	1051
2¾	157	485	815	165	9¾	3101	5288	1091
3	177.8	552	926	187	10	3216	5490	1136
3¼	199.8	624	1047	211	10½	3480	5940	1230
3½	222	695	1167	236	11	3716	6355	1320
3¾	245	769	1292	261	11½	3960	6780	1410
4	269	846	1424	288	12	4185	7165	1495
4¼	293.6	925	1559	316	12½	4430	7595	1575
4½	318	1006	1696	345	13	4660	8010	1660
4¾	344	1091	1835	374	13½	4950	8510	1780
5	370	1175	1985	405	14	5215	8980	1885
5¼	395.5	1262	2130	434	14½	5475	9440	1985
5½	421.6	1352	2282	465	15	5740	9920	2090
5¾	449	1442	2440	495	15½	6015	10400	2165
6	476.5	1535	2600	528	16	6290	10900	2300
6¼		1632	2760	560	16½	6565	11380	2410
6½		1742	2920	596	17	6925	11970	2520
6¾		1826	3094	630	17½	7140	12410	2640
7		1928	3260	668	18	7410	12900	2745
7¼		2029	3436	701.5	18½	7695	13410	2855
7½		2130	3609	736	19	7980	13940	2970
7¾		2238	3785	774	19½	8280	14460	3090

This table is based on Francis formula:

$$Q = 3.33 (L - 0.2H) H^{1.5}$$

which


Q = cu. ft. of water flowing per second.

L = length of weir opening in feet. (should be 4 to 8 times H).

H = head on weir in feet (to be measured at least 6 ft. back of weir opening).

a = should be at least 3 H.

Table 6. — Discharge from triangular notch weirs with end contractions

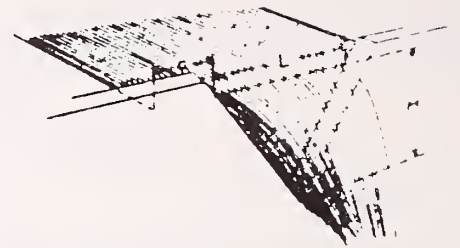

Head (H) in inches	Flow in gallons per minute		Head (H) in inches	Flow in gallons per minute		Head (H) in inches	Flow in gallons per minute	
	90° Notch	60° Notch		90° Notch	60° Notch		90° Notch	60° Notch
1	2.19	1.27	6¼	260	150	15	1912	1104
1¼	3.83	2.21	7	284	164	15½	2073	1197
1½	6.05	3.49	7¼	310	179	16	2246	1297
1¾	8.89	5.13	7½	338	195	16½	2426	1401
2	12.4	7.16	7¾	367	212	17	2614	1509
2¼	16.7	9.62	8	397	229	17½	2810	1623
2½	21.7	12.5	8¼	429	248	18	3016	1741
2¾	27.5	15.9	8½	462	267	18½	3229	1864
3	34.2	19.7	8¾	498	287	19	3452	1993
3¼	41.8	24.1	9	533	308	19½	3684	2127
3½	50.3	29.0	9¼	571	330	20	3924	2266
3¾	59.7	34.5	9½	610	352	20½	4174	2410
4	70.2	40.5	9¾	651	376	21	4433	2560
4¼	81.7	47.2	10	694	401	21½	4702	2715
4½	94.2	54.4	10½	784	452	22	4980	2875
4¾	108	62.3	11	880	508	22½	5268	3041
5	123	70.8	11½	984	568	23	4565	3213
5¼	139	80.0	12	1094	632	23½	5873	3391
5½	156	89.9	12½	1212	700	24	6190	3574
5¾	174	100	13	1337	772	24½	6518	3763
6	193	112	13½	1469	848	25	6855	3953
6¼	214	124	14	1609	929			
6½	236	136	14½	1756	1014			

Based on formula:

$$Q = (C) (4/15) (L) (H) \sqrt{2gH}$$

in which Q = flow of water in cu. ft. per sec.

L = width of notch in ft. at H distance above apex.

H = head of water above apex of notch in ft.

C = constant varying with conditions, .57 being used for this table.

a = should be not less than ¼ L.

For 90° notch the formula becomes

$$Q = 2.4381H^{5/2}$$

For 60° notch the formula becomes

$$Q = 1.4076 H^{5/2}$$

—Courtesy Ingersoll-Rand Co.

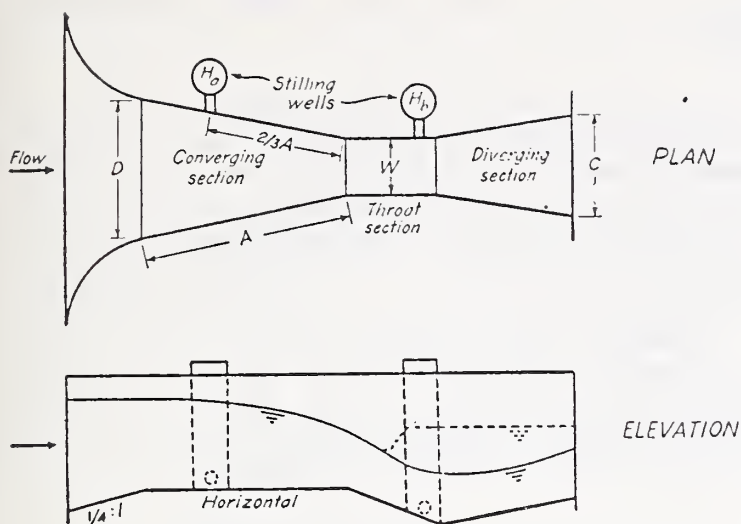


Figure 2. Parshall flume.

b. The flume must be set in a horizontal position.

c. The flow condition (free or submerged) must be determined in order to calculate discharge.

The following equation may be used to determine discharge through a Parshall flume (see fig. 2).

$$Q = 4WH_a 1.522W^{0.026}$$

where:

$Q$  = discharge (ft<sup>3</sup>/min)

$W$  = throat width (ft)

$H_a$  = head for free flow condition,  
 $H_b/H_a < 0.75$  (ft)

If  $H_b/H_a > 0.75$  use  $H_a - H_b$  in place of  $H_a$ . In addition to the above formula, discharge can be calculated from rating tables supplied with the flume.

*Horizontal or inclined pipes.* — This method yields approximate discharge rates from horizontal or inclined pipes flowing full or partially filled. The method is described in fig. 3.

*Stream velocity measurements.* — Stream velocity can be used to calculate discharge with the following relation:

$$Q = VA$$

where:

$Q$  = discharge rate

$V$  = flow velocity

$A$  = flow area (width x depth).

Various velocity measurement techniques are discussed below:

*Current meters.* — The Price current meter is the most widely used velocity meter in the United States. Mean stream velocities are determined by measuring the velocities at the 0.2 and 0.8 flow depths and then averaging. These meters usually yield very accurate results, however, excessive debris or fine suspended sediment in the stream may foul the meter.

*Floats.* — Floats are a simple, cheap method of determining flow velocity. The float is placed in the stream and its travel distance vs time is measured (velocity = distance/time). Oranges and grapefruit are ideal floats because they are highly visible and float just at the water surface so wind effects are minor. This method can be used only in channels with uniform flow free of obstruction or debris.

*Velocity head.* — Discharge or velocity measurements are often times difficult in small channels with shallow flow. In these situations the velocity head method provides reasonable discharge estimates. To determine velocity, a ruler is inserted into the channel such that it is perpendicular to the water surface with the broad side normal to the flow. The difference in water level between the upstream and downstream face of the ruler is inserted into the following equation to determine velocity:

$$V = \sqrt{2gh}$$

where:


$V$  = velocity (ft/sec)

$g$  = gravitational acceleration (32.2 ft/sec<sup>2</sup>)

$h$  = difference in water surface elevation between upstream and downstream face of the ruler (ft).

With practice, this method can yield flow estimates within 20 percent of the actual value, but is not a preferred method.

(FULL PIPES)

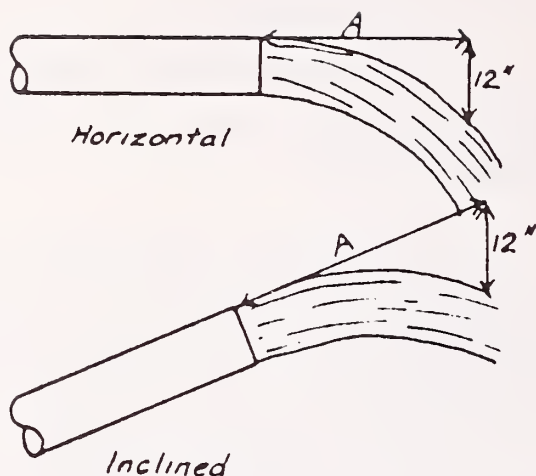


A fairly close determination of the flow from full open pipes may be made by measuring the distance the stream of water travels parallel to the pipe in falling 12 inches vertically.

Measure the inside diameter of the pipe accurately (in inches) and the distance (A) the stream travels in inches parallel to the pipe for a 12-inch vertical drop. (See diagram)

The flow, in gallons per minute, equals the distance (A) in inches multiplied by a constant K obtained from the following table:

I.D. Pipe	K	I.D. Pipe	K	I.D. Pipe	K	I.D. Pipe	K	I.D. Pipe	K	I.D. Pipe	K
2	3.3	4	13.1	6	29.4	8	52.3	10	81.7	12	118.
1/4	4.1	1/4	14.7	1/4	31.9	1/4	55.6	1/4	85.9	1/2	128.
1/2	5.1	1/2	16.5	1/2	34.5	1/2	59.0	1/2	90.1	13	138.
3/4	6.2	3/4	18.4	3/4	37.2	3/4	62.5	3/4	94.4	1/2	149.
3	7.3	5	20.4	7	40.0	9	66.2	11	98.9	14	160.
1/4	8.6	1/4	22.5	1/4	42.9	1/4	69.9	1/4	103.	1/2	172.
1/2	10.0	1/2	24.7	1/2	45.9	1/2	73.7	1/2	108.	15	184.
3/4	11.5	3/4	27.0	3/4	49.0	3/4	77.7	3/4	113.	16	209.

(PARTIALLY FILLED PIPES)



For partially filled pipes, measure the freeboard (F) and the inside diameter (D) and calculate the ratio of F/D (in percent). Measure the stream as explained above for full pipes and calculate the discharge. The actual discharge will be approximately the value for a full pipe of the same diameter multiplied by the correction factor from the following table:

F/D Percent	Factor	F/D Percent	Factor	F/D Percent	Factor	F/D Percent	Factor
5	0.981	30	0.747	55	0.436	80	0.142
10	.948	35	.688	60	.375	85	.095
15	.905	40	.627	65	.312	90	.052
20	.858	45	.564	70	.253	95	.019
25	.805	50	.500	75	.195	100	.000

Courtesy U. S. Geological Survey

Figure 3. Estimating flow from horizontal or inclined pipes.



## Sediment Discharge Measurement

Measurement of sediment discharge or the sediment load of a stream is a difficult matter which should be left to a competent hydrologist with adequate experience. Briefly, measurement is accomplished through use of samples which accumulate sediment over a measured period of time. Laboratory studies reveal that at least ten sediment samples per station are required to achieve  $\pm 10\%$  accuracy. The following information is required to calculate sediment transport rates (Simons and Senturk 1977):

- a. Stream discharge rate.
- b. Stream velocity.
- c. Cross-sectional flow area.
- d. Stream width.
- e. Mean sampling depth for suspended sediment.
- f. Suspended sediment concentration.
- g. Size distribution of channel bed material.
- h. Water temperature.

The following conditions must be met in the test reach (Simons and Senturk 1977):

- a. The reach should be uniform in shape and sediment composition.
- b. No sharp bends, rills, or excessive vegetation in the test reach.
- c. No significant tributaries or diversions should join the river within or immediately above the test reach.

## Drilling and Sampling Program

### DESIGNING A GEOLOGIC OVERBURDEN AND HYDROLOGIC SAMPLING PROGRAM

#### General

The goals of any overburden and hydrologic sampling program are to obtain data for evalu-

ating the physical and chemical characteristics of overburden material, ground water quality and quantity, and reclamation studies. In addition to obtaining information on these areas of concern the overburden and hydrologic sampling program will also provide data useful in evaluating geotechnical and mineral resource consideration. Geotechnical considerations involve evaluation of the rock characteristics that affect mine layout and pit design. These characteristics include such items as slope stability, floor heave, and the distribution and density of joints, faults, etc. Central to the goals listed above is the conduct of a drilling program which will provide samples and information on the overburden and ground water hydrology. Specifically, answers to the following questions can usually be obtained from the drilling program and from a thorough analysis of the core and/or cutting samples:

What is the thickness, depth, and quality of the host rock containing the mineral resource or the coal seam to be mined?

What is the thickness of the overburden above the mineral resource or coal seam, and the interburden between coal seams?

What is the extent, nature, and distribution of various soils within the exploration boundaries?

What are the rock types and the physical and chemical characteristics of the overburden, interburden, and floor material?

What are the stratigraphic relations (lateral continuity or variability) of the various rock units that constitute the overburden material?

What structural features such as joints, faults, and discontinuities are present that might affect subsequent mining operations?

What are the depths of weathering and mechanical breakdown for specified overburden units?

What are the characteristics of the main water-bearing units in the overburden (e.g., their transmissivity, storage coefficients, leakage coefficients, ground water flow rates, and water quality)?

What will be the impacts of the mining operation on the ground water system and its users?

What will be the impacts of the ground water system on the mining operations?

## Drill Hole Spacing and Location

In a recent Environmental Protection Agency report (Smith and others 1976, p. 5) it was recommended that detailed geologic overburden sampling of rock columns down to the coal should be required arbitrarily, at intervals of 1 km (0.6 mi) or less, depending on the rate of lateral change in rock strata. Recommendations of this type are most certainly unwarranted for several reasons.

1. The setting of arbitrary limits on drill hole spacing cannot be justified as such a procedure will not provide the most efficient means of collecting information on overburden, hydrology, geotechnical considerations, and mineral resources.

2. Arbitrary limits cannot be justified on the basis of the great variability in the lateral continuity of rock strata in various basins.

If arbitrary limits are unjustified, it follows that drill hole spacing and location must be determined uniquely for each geologic province or possibly even for each mine site. In making these determinations, several aspects of drilling and sampling theory must be reviewed.

In the first place, it should be emphasized that most programs initiated by mining companies will proceed in a series of stages or phases. Initial drilling may involve only reconnaissance holes with a wide spacing designed to penetrate geologic formations for rock units of potential interest and to provide generalized structural data. If favorable results are forthcoming, additional drilling programs will be designed to locate trends in mineralization. Ultimately, when ore bodies are to be outlined in detail, closely spaced drill holes will be required. This type of exploration program is particularly common in the search for sandstone-type uranium ore bodies. Such a program of successive steps in detecting, outlining, and sampling a disseminated copper-molybdenum sulfide deposit is illustrated in fig. 4. Other types of exploration programs may be more common in coal exploration where the general extent and character of major coal re-

serves is known with greater certainty. In any event, modifications to the exploration program will certainly occur as the program progresses and as new data becomes available.

One essential element of any sampling design (pattern of drill holes) is a randomization procedure. The notion of random samples disturbs many scientists who feel that samples should be collected on the basis of scientific judgment. In random sampling, however, scientific judgment can be used in defining a population to be sampled. Once defined, each potential sample in the population must be given an equal chance of being picked. This can be illustrated by a number of more widely used sampling designs as shown in fig. 5.

Assuming the area to be investigated is underlain by homogeneous strata, a simple random sampling plan (fig. 5A) can be used. On the other hand, if the overburden rock strata changes say, from sandstones in the northwest to shales and finally to limestones in the southeast portion of the mine area, a stratified random sampling plan (fig. 5B) might be more appropriate. In this case, the areas to be sampled are selected on the basis of scientific (geologic) judgment while the exact location of each drill hole within an area is selected by some type of random process.

A third consideration involved in the design of a drill hole program involves the type of drilling methods used. The overwhelming majority of holes drilled by mining companies will involve the use of rotary drilling methods that provide cuttings or chips of the overburden units but not continuous cores. Although continuous cores are preferable from the standpoint of detailed evaluation of the overburden, the cost is much greater. A thorough discussion of drilling and sampling methods is found in the following section of this handbook.

Some continuous cores, along with drill cuttings and geophysical logs from other drill holes, should be sufficient for the analysis of the overburden material.

The spacing of continuous cores must be based on specific site considerations (e.g., lateral variability in overburden strata) as determined from studies of cuttings and geophysical logs. Finally, unless other considerations such as the



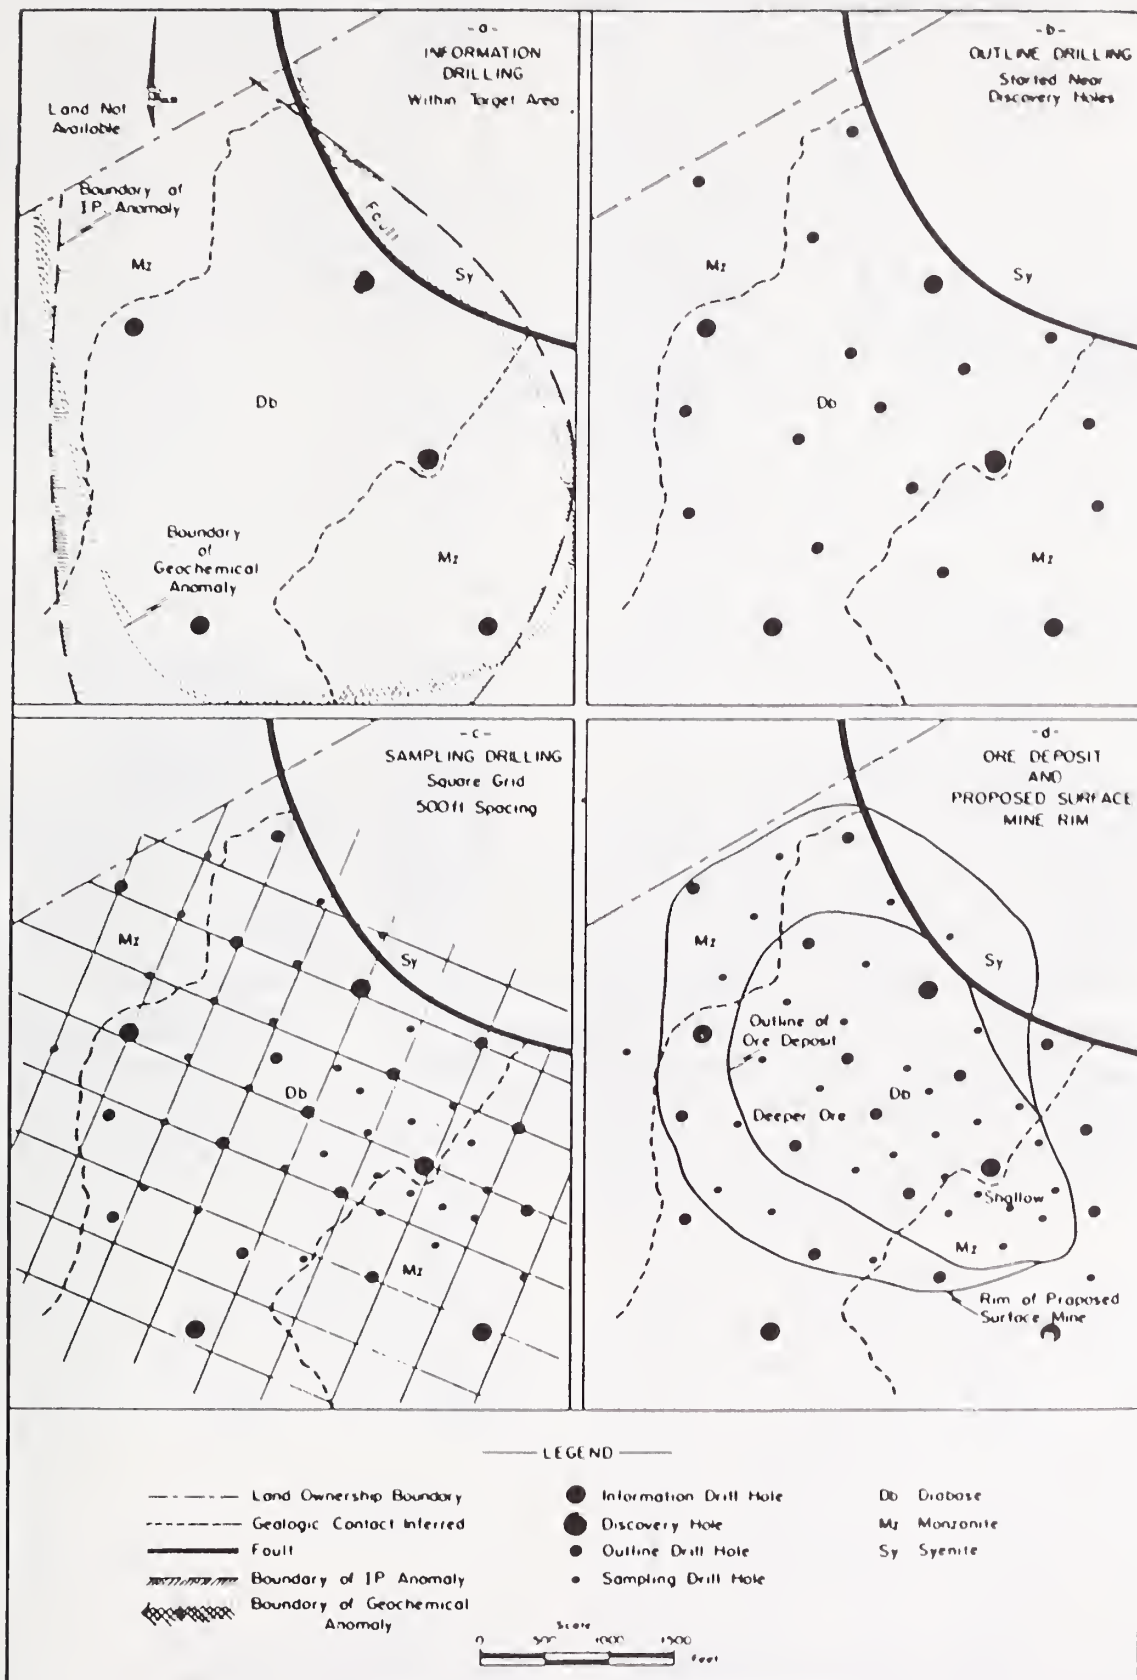



Figure 4. Successive steps in an exploration drilling program to detect, outline, and sample a disseminated copper-molybdenum sulfide deposit (From Bailey, P. A. 1968, fig. 2.1-2, p. 31. Used by permission of the American Institute of Mining, Metallurgical, and Petroleum Engineers, Inc.).

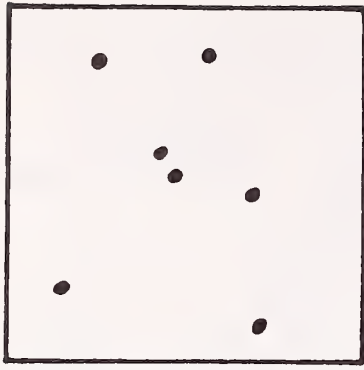


A. Simple random sampling

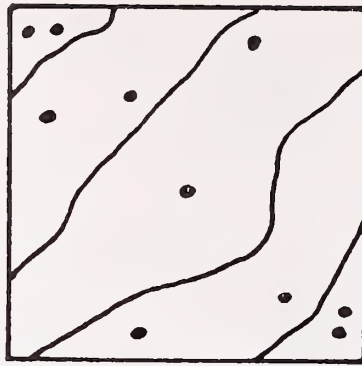


B. Stratified random sampling with natural strata

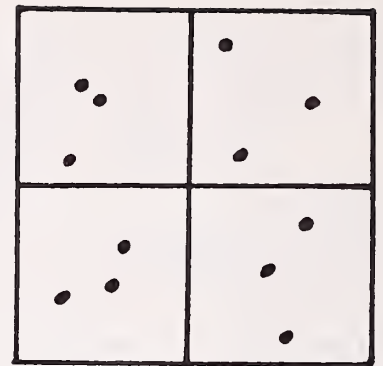


C. Stratified random sampling with artificial strata

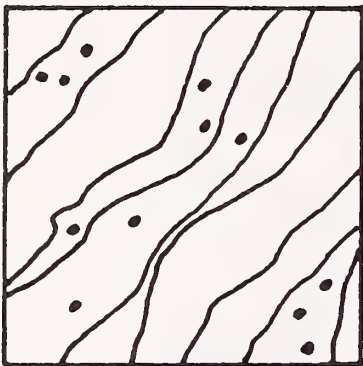


D. Two-stage sampling with natural strata

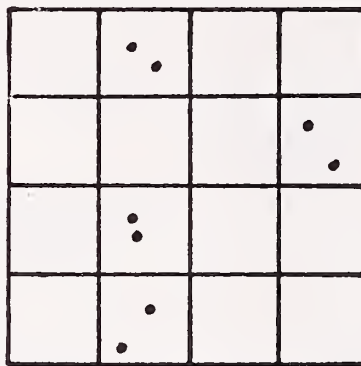


E. Two-stage sampling with artificial strata

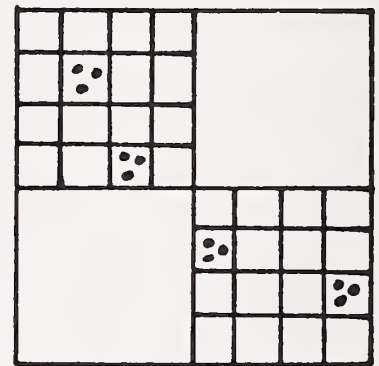

F. Three-stage sampling with artificial strata

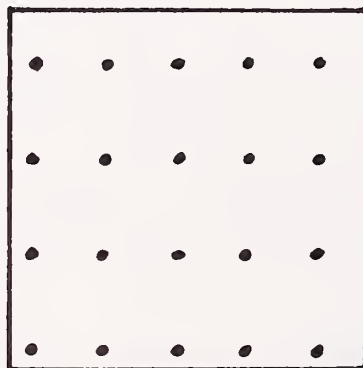

G. Systematic sampling

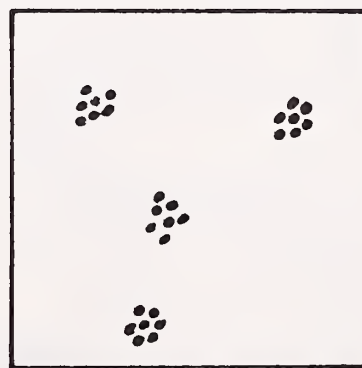

H. Cluster sampling

Figure 5. Some of the more commonly used sampling designs. See text for a more complete explanation (after Miesch 1976, fig. 16, p. 83).

location of water wells, location of holes to gather geotechnical information, access routes, etc., warrant it, the specific location of continuous core drill holes should be determined by random processes within each area considered to be a geologic population.

Two recent reports (Dollhopf and others 1978; and Hinkley and others 1978) address the problem of drill hole spacing for characterizing the physical and chemical characteristics of overburden material at specific sites in Montana. Both studies involve an evaluation of the Fort Union Formation which displays considerable lateral and vertical variability in both physical and chemical characteristics. Dollhopf and others (1978) develop a predictive regression equation that suggests that the drill hole spacing of 76 m (250 ft) allowed for the greatest accuracy in predicting overburden characteristics. Their regression relationship (Dollhopf and others 1978, p. 63) allows an investigator to determine drill hole spacing between 76 m (250 ft) and 610 m (2,000 ft) based on a trade-off between reliability or accuracy of the information obtained and the cost of drilling operations. This procedure provides a significant step forward in establishing a geologic overburden and hydrologic sampling program. The equation has not, however, been tested outside of the Coalstrip, Montana area or in other geologic strata. Hinkley and others (1978) in a separate study of the Fort Union Formation in Montana, state that a single drill hole anywhere on a mine site will provide the same information on overburden characteristics as many holes. Drill hole spacings used in their study, however, were between 1 and 4 km. At these distances the accuracy of prediction based on the equation presented by Dollhopf and others (1978) is no better than 50 percent.

## Sampling Intervals

Smith and others (1976, p. 5) recommend that routine sequential sampling of overburden columns (from continuous cores) with depth should require at least one sample representing each 0.3 m (1 ft) of overburden from the land surface to the top of each coal to be mined. Furthermore, they suggest that if samples for analysis are taken by a qualified geologist, the sample interval can be extended to 1.5 m (5 ft). This

type of arbitrary limitation on the distribution of samples for laboratory analysis is as unjustified as an arbitrary spacing of drill holes.

The type, purpose, and amount of sample needed for a particular analysis must be considered in determining sampling intervals. For example, the amount of core material needed for preparing a thin-section for mineralogical determinations is extremely small compared with the amount of sample needed for salinity, fertility, textural analysis, or plant growth studies in the greenhouse. An arbitrary sampling interval of 0.3 m for thin sections would, undoubtedly, produce redundant data; whereas, the same interval would result in insufficient samples to run other desired chemical and physical analyses.

There are at least two logical ways to approach the method of sampling intervals within a continuous core.

1. The geologic overburden can be divided into rock types (sandstone, shale, mudstone, etc.) and each unit can be sampled according to the thickness of the strata. This type of procedure is generally satisfactory, however, it may provide unnecessary duplication of analyses of the same rock type if it occurs repeatedly in a core. Age differences between the upper and lower portions of a core may, however, justify this repetition as older strata with the same visual characteristics may have different chemical aspects because of diagenetic alterations (alteration of the rock after deposition and burial).

2. A more satisfactory, but also more complicated method of determining sample intervals, involves the recognition of the paleoenvironments of the overburden (i.e., the equivalent modern environment in which a particular stratum was deposited). Once these paleoenvironments are recognized, the strata can be divided into a number of genetically related units (populations), each of which can be sampled for laboratory analyses. The justification of this type of approach can be found in Caruccio et al. (1977, p. 1 and 2). These authors have found that the occurrence of framboidal iron disulfide, for example, within a particular rock strata is a function of its paleoenvironment. That is to say, the conditions under which the rock was deposited control the formation of certain toxic minerals. Thus the association of framboidal

pyrite to certain paleoenvironments (rock sequences) in eastern coals is a key to the identification of rocks associated with coal strata which, when mined, will produce acid mine drainage problems.

The second type of sample interval selection shows great promise for use in the future. There are several problems, however, associated with the use of this plan at the present time. Only some geologists and soil scientists have the training to recognize the paleoenvironments of overburden strata and the relationships which appear valid for eastern coals are only now being tested on western coal bearing sequences. For example, Moran and others (1978) in a study of North Dakota lignite bearing sequences suggest that geochemical variations in overburden materials may be related to the environment of deposition. Unfortunately, they present very little data on correlations to support their statement. Groenewold (1979) demonstrates that an understanding of the original environment of deposition of the overburden material coupled with a well integrated mining and reclamation plan will allow for the design of a postmining landscape in which water chemistry is predictable. The authors of this handbook are currently gathering data from coal bearing sequences in the Powder River Basin to test this contention. No conclusions are available at this time, however.

At this time we, therefore, recommend the first procedure of dividing the overburden strata into rock types on the basis of macroscopic (visual) differences and using these units as sample intervals.

## Hydrologic Considerations

In order to evaluate the existing ground water quantity and quality and to determine the impact of mining on the ground water system and its users, a surveillance network must be established that is representative of the system and that provides data concerning the structure, geometry, and hydraulic characteristics of the system. Physically, this surveillance network will consist of a number of monitoring wells, some of which will certainly be used to obtain geologic overburden information as discussed above. With

the information obtained from this network it will be possible to estimate the system's response to natural and manmade stresses.

The first and most important step in designing a ground water monitoring network is to identify the purpose and objectives of the monitoring program. Consideration should be given to the fact that monitoring sites located within the area to be mined will be destroyed and, therefore, are only temporary. To provide monitoring during and after mining, some sites must be located outside the area to be mined. Once this is accomplished, the investigator determines the optimum location and number of wells in the network necessary to attain these goals. The following examples illustrate the relationship between the purpose and pattern of two idealized observation networks. For instance, changes in ground water levels and storage volumes are best observed via an array of randomly spaced wells (fig. 5A), whereas specific recharge and discharge locations should be monitored by clusters of wells in each area (fig. 5H). In both examples, the number of wells required in the study area depends upon the complexity of the aquifer system and the level of detail desired (Heath 1976).

The hydrologic characteristics of an aquifer system are largely determined by the areal geologic conditions. The geologic conditions must be incorporated into the design of an observation network if it is to provide accurate information concerning the geometry and hydrologic parameters of the aquifer system. In many areas the detailed subsurface geology is not known prior to drilling; thus the monitor network must be flexible so that it may be modified as additional data is obtained during drilling. Potential drilling costs may be reduced in situations where geologic formations provide information about subsurface conditions. The investigator should not be overly reliant on surface relations; however, in many areas the conditions at depth are totally unrelated to the topography and geology at the surface.

At this point it is useful to examine qualitatively, the various types of geologic material and structure with respect to their aquifer characteristics and impacts on the monitor network design.

*Unconsolidated formation.* — Unconsolidated aquifer materials are composed of sand and gravel zones usually associated with silt and clay. These sediments exhibit intergranular permeability and water contained in them exists in pore spaces or the interstices between grains. Gravel and sand deposits occur naturally in a variety of configurations; extensive, continuous thick or thin beds, discontinuous beds and lenses, stringers, and erosion channels.

Monitoring network design is fairly straightforward in extensive continuous deposits; an array of randomly spaced wells penetrating the same aquifer is sufficient. Discontinuous beds, lenses, and erosion channels are a difficult monitoring problem requiring a detailed knowledge of the subsurface geology. In this case, well spacing is dependent upon the variability of the aquifer deposits; highly variable, discontinuous formations require a greater monitor well density than continuous deposits. Monitor networks in channelized aquifer deposits should consist of wells placed at regularly spaced intervals along the channel axis. A detailed monitor network in these deposits would require an extensive drilling program at great expense.

*Consolidated formations.* — Consolidated aquifer formations are composed of sandstones exhibiting intergranular and/or fracture permeability or other rock types with fracture or solution channel permeability. Continuous sandstone units with intergranular permeability can be monitored by a network of randomly spaced wells penetrating the same formation. Aquifers with fracture or solution channel permeability may be more difficult depending upon the fracture or solution channel density. Highly fractured formations may be considered as homogeneous systems on a large scale and monitored accordingly. Aquifer systems with widely spaced fractures or solution channels require extensive subsurface exploration before a representative monitoring network can be established.

*Geologic structure.* — For our purpose, geologic structure includes such features as faults, folds, and bedrock contacts.

Faults may be barriers or conduits for ground water movement depending upon the lithology and geologic history of the region. Faults frequently become ground water barriers

due to the formation of impermeable clay gouge zones or by offsetting the aquifer formation until it abuts impermeable deposits. Faults can be ground water conduits when permeable fracture zones are created in otherwise impermeable materials.

Folds have various effects on the ground water flow regime depending upon the type of strata involved and the fold intensity. Localized, discontinuous, perched, and compartmentalized ground water bodies commonly occur in areas of complex geologic structure (Bean 1967).

Ideally a monitoring system should have wells above and below the aquifer in addition to those within the aquifer in order to gain information about the three-dimensional response of the aquifer system to stresses (Heath 1976). The hydrologist must use the disciplines of engineering, geology, hydrology, and economics when designing a monitoring network. In addition, a compromise must be made between the detail produced by the monitor network and its costs.

## **DRILLING AND SAMPLING METHODS**

### **Drilling**

This section mentions the most common methods for drilling, but no attempt has been made to describe the procedure for drilling. Drilling techniques and equipment are described in detail by Acker (1974), Campbell and Lehr (1973), and Johnson (1975). Table 7 summarizes various drilling methods that affect overburden sampling and formation logging; and their affect upon water yield and quality tests. Some recommended drilling methods for various types of geologic overburden are also given in the table.

### **Sampling During Drilling**

Three methods to advance samples during drilling are driving, augering, and rotary core drilling. Drive sampling is used for surficial materials (soils) both above and below the water table. Hammering, jacking, pushing, single blow, and shooting are used to drive samplers into the

**Table 7. — Summary of commonly used drilling methods**

<b>Method</b>	<b>Recommended overburden conditions</b>	<b>Overburden sampling and formation logging</b>	<b>Water yield and quality tests</b>
Cable-tool percussion	Good for fractured or broken formations.	Undisturbed cores cannot be obtained; cuttings samples are of sufficient size to permit geological identification and description; samples are not contaminated with drilling mud; samples bailed from each interval represent about a 3 to 5 ft zone; when casing is used during drilling there is little chance of sample contamination for caving.	Water bearing zones can be easily identified; there is a minimum contamination of water producing zones; potential aquifers can be tested for yield and quality of water by bailing or pumping; permits measurement of static water levels.
Rotary drilling (direct circulation) using water or drilling mud as the drilling medium.	Unsatisfactory or difficult in loose, coarse-grained overburden with cobbles or boulders.	Drill cuttings are mixed from different depths and contaminated by drilling mud when used; cuttings brought to the surface can vary with depth characteristics rather than from where the material was penetrated; sample lag time in deeper holes can become troublesome in obtaining a reliable geologic log.	Measuring static water levels, taking representative water samples, and performing pump tests of individual aquifers is not practical; when used for drilling water wells the holes should be drilled using water or drilling additives that are biodegradable so that the drilling medium can be removed from the well during development.
Rotary-drilling (direct circulation) using air as the drilling medium.	Recommended for highly fractured or cavernous rock such as coal or limestone where conventional rotary drilling would result in the loss of drilling fluids and circulation.	Instant cuttings recovery; as is moisture samples; no washed cores; samples are not contaminated with drilling mud.	Depth to water table can be determined; there is a minimum contamination of water producing zones.
Air-percussion rotary drilling	Best for consolidated rock formations.	Samples are not contaminated with drilling mud.	Depth to water table can be determined; there is a minimum of contamination of water producing zones.
Reverse circulation rotary drilling	Recommended for drilling large holes in unconsolidated formations such as sand, silt, or soft clay.		
Rotary drilling with reverse circulation and dual wall pipe	Excellent for drilling and sampling in formations which are highly fractured and/or have voids and cavities.	Produces larger sized chip particles than that of conventional rotary equipment; more accurate and more continuous samples compared to other rotary methods; eliminates sample contamination caused by caving formations or particles eroded from the sides of the hole.	Water aquifers can be identified immediately when drilling with air; permits measurement of static water levels.
Hammer drilling with reverse circulation and dual wall pipe.	Designed to penetrate alluvial formations, and can penetrate sand, gravel, and boulder formations at rapid speed.	Provides a continuous and accurate geological sample of the penetrated material; no critical layers such as soft seams, organic layers, etc., are missed; large cobbles can be lifted without prior crushing.	Aquifers can be pinpointed within inches because once the drive bit has progressed beyond the aquifer, the samples become dry again.
Auger boring	This method is best suited for loose, dry, moderately cohesive soils and broken formations which will not easily cave.	Obtains representative disturbed samples; generally not satisfactory for obtaining samples below the water table.	Water samples are not contaminated with any drilling medium; permits measurement of static water levels.
Drive-tube boring	Not satisfactory in coarser fine-grained soils, clean sands, or cohesionless soils below the water table.	Obtains representative disturbed samples.	Water samples are not contaminated with any drilling medium; permits measurement of static water levels
Wash boring	Slow in hard or cemented layers.	Representative samples cannot be obtained.	
Jetting	Slow in hard cohesive soils.	No information for formation logging or samples for classification.	



soil. Rapid continuous pushing using drill rods and the hydraulic cylinders of a drill rig is recommended for overburden studies.

Auger sampling is used in surficial materials (sands, silts, clays) above the water table. Hollow stem augers permit sampling below the water table. This method advances the hole with a hollow stem auger; when sampling is desired the drilling is halted and a drive sampler is passed through the hollow stem to take samples at the bottom of the auger stem. A rotary drill rig can be fitted for auger drilling.

Rotary core drilling can be used to obtain rock and soil samples. Rotary core drilling is more costly and complicated than drive sampling or augering techniques. More variables must be considered for rotary coring such as coring bits and circulation of a drilling medium such as air, water, or mud.

An improved method of collecting cuttings from a rotary drilled hole using water or water base mud as the circulating fluid is described by Huff and Youngberg (1978). The equipment for undertaking this type of cuttings collection is known as the Sample Master.

## Using Drilling Fluids During Sampling

During rotary drilling it is necessary to use a drilling medium such as air, water, or mud for lifting cuttings from the borehole. For overburden studies it is recommended that air be used where possible. The next recommended choice would be water.

The use of drilling mud should be avoided unless absolutely necessary to overcome lost circulation problems, or to lift cuttings from deep holes, or to support the borehole during drilling. When using mud additives it is recommended that a biodegradable mud be used if the borehole is to be converted into a water well.

Rock cores obtained when using drilling mud should be carefully washed before any chemical tests are completed on samples. A chemical analysis should be obtained on the water and/or drilling mud when used. This analysis will be useful when interpreting any chemical tests that might be done on soil or rock samples.

Table 8 shows how various drilling mediums can affect chemical tests.

## Prevention of Borehole Caving During Sampling

During drilling and sampling in soft or cohesionless material, the walls and bottom of the borehole can cave. The sides of the borehole can gradually squeeze in if the soil or rock is plastic such as clay material. Casing the borehole with pipe or the use of drilling mud can prevent caving or squeezing in of the borehole.

For overburden studies, it is recommended that the borehole be cased with pipe when drilling materials that can cave or squeeze in. As drilling progresses the drill hole is lined with pipe having an inside diameter which permits the passage of the drill bit to advance the hole and for entry of the sampler. When drilling with rotary systems, the use of drilling mud for supporting the sides of the borehole should be avoided unless absolutely necessary. This will prevent contamination of chemical tests and water aquifers.

## Sampling and Rotary Coring Bits

There are a wide variety of coring bits available to drill various geologic materials. Tungsten carbide inserts and sawtooth bits are often used in soils and soft or medium hard rocks because they are less expensive than diamond bits. Diamond bits can be used in soft and medium hard rocks, and are a necessity in hard rocks. Table 9 gives some recommended coring bit designs to be used for various geologic conditions.

## Suggested Techniques to Obtain a High Percentage of Core Recovery in Soft or Poorly Consolidated Materials

Good core recovery depends a great deal upon the skill of the drillers who are working with the coring job. The following suggestions can help improve core recovery when used by drillers:

**Table 8. — Effects of Sampling Methods on Results of Chemical Analysis of Overburden Samples (adapted from Power and Sandoval 1976)**

<b>Drilling methods</b>	<b>Positive aspects</b>	<b>Negative aspects</b>
1. Pneumatic drilling (air), no solutions used, and cuttings blown out of drill hole by compressed air. Samples taken in 1 ft intervals.	Least contaminated, fastest, least expensive.	Solid core was not obtained; difficult to drill when overburden is wet.
2. Coring by circulating water through the drill stem. (Low salt)	Less contamination than with high salt but greater than using Revert.	Lost circulation, soluble salts leached from near surface zone, high cost.
3. Coring by circulating bentonite drilling mud and water through the drill stem. (Mud)		Lost circulation, soluble salts leached from near surface zone, high cost.
4. Coring by circulating water with added sodium and magnesium sulfate through the drill stem. (High salt)		Lost circulation, greater contamination than with low salt, soluble salts leached from near surface zone, high cost.
5. Coring by circulating an organic polymer (Revert) and water through the drill stem.	Circulation was not lost during drilling.	High cost.
6. Highwall samples (used as reference samples)		

1. Keep the weight on the bit low to prevent plugging the ports of the bit, and to prevent core breakage.

2. Use a high rotation speed.

3. Use a face-discharge bit or a pilot bit with narrow kerf.

4. Use a high viscosity drilling mud.

5. Take large sized cores. In general, the larger the core size taken the better the recovery.

6. Keep trash and lost circulation materials out of the drilling water or mud.

## **Sampling and Coring Techniques**

The sampling and coring techniques mentioned in this handbook can be grouped into the

following categories: 1) drive samplers, 2) auger samples, 3) rotary coring samples, and 4) special techniques. Table 10 gives some guidelines that can be used when selecting a sampling technique for soils or rock overburden.

## **WELL COMPLETION METHODS**

### **Well Construction**

Wells can be drilled using any drilling method described in this handbook. The drilling and construction of wells are described in detail by Anderson (1967), Campbell and Lehr (1973), and Johnson (1975). Techniques used successfully in coal studies are described by Moran and others (1978).

Table 9. -- Recommended coring bit designs (Acker 1974)

Geologic condition	Recommended bit design for best results	Core diameter in inches
<b>SOFT</b>		
Calcite	Pyramid carbide	7/8 to 6
Chalk	Sawtooth	7/8 to 6
Gypsum	Diamond-pilot crown	7/8 to 3 11/32
Limestone	Diamond-large diameter	2 3/4 to 6
Talc	conventional crown	1 1/8 to 2 5/8
Shale	Diamond-face discharge	
<b>MEDIUM</b>		
Claystone	Pyramid-carbide	7/8 to 6
Siltstone	Diamond-pilot crown	7/8 to 3 11/32
Sandstone	Diamond-conventional crown	7/8 to 6
Limestone	Diamond-face discharge	1 1/8 to 2 5/8
Slate		
Coal		
<b>HARD</b>		
Marble	Diamond-stepped crown	7/8 to 3 11/32
Limestone	Impregnated diamonds-	7/8 to 3 11/32
Chert	conventional crown	
Garnet schist		
Granite		
Gneiss		
Garnet mica		
Dolomite		
Quartzite		
Taconite		
Jasper		

## Well Casing

The size, weight, and resistance to corrosion of casing should be considered in water well design. Four-inch diameter wells are the smallest size that will handle a submersible pump. Carbon steel casing is highly resistant to soil corrosion, and stainless steel has excellent durability. Plastic casing is used frequently because it is less costly than steel. Polyvinyl chloride (PVC) is used for depths up to 200 ft. Fiberglass-reinforced epoxy pipe has been used for depths up to 300 ft. Plastic well casings are usually not larger than 6 inches in diameter.

## Well Screen and Perforated Casing

Wells in unconsolidated materials need openings in the casing to permit entrance of water into the well. In solid rock formations the casing can be left open at the bottom, and water can enter the well through the end of the casing. Well casing can be perforated in the field using torches, saws, or drills. Casing can also be purchased with perforations that were made at the factory.

Well screens are often used in place of perforated casing. Screen can be purchased with open areas ranging from 2 to 60 percent. Well

**Table 10. -- Summary of sampling techniques for soils and geologic overburden**

Sampling technique	Recommended geologic conditions for best results	Method of penetration	Length of sample held in barrel	Core diameter	Water table influence	Core quality	State of development	Source <sup>1</sup>
"Pocket" solid barrel sampler (spoon type)	Gravels, sands	Rotate	36 — 60 inches	1 1/2 to 2 1/2 inches	Recovery and quality of sample questionable below	Not core sample; disturbed material	Readily available	Longyear, Joy
"Door" or "window" type sampler	Gravels, sands	Rotate	36 inches	5 inches	Recovery and quality of sample questionable below	Not core sample; disturbed material	Readily available	Joy
Sidewall sampler	Used only when other sampler types fail	Rotate		1 1/2 to 2 1/2 inches	Recovery and quality of sample questionable below	Not core sample; disturbed material	Readily available	Joy
Thin wall "Shelby tube" sampler	Silts, clays	Press	24 — 54 inches	1 7/8 to 4 7/8 inches	Satisfactory below with normal care	Undisturbed core sample	Readily available	Acker, Joy, Longyear, Mobil Drill, Penndrill, Soiltest, Sprague and Henwood
Solid barrel sampler	Sands, silts, clays	Drive or press	60 inches	1 1/2 to 3 inches	Recovery and quality of sample questionable below	Disturbed core sample	Readily available	Joy, Longyear
Split barrel sampler	Sands, silts, clays	Drive or press	12 — 24 inches	1 1/2 to 3 inches	Recovery and quality of sample questionable below	Disturbed core sample	Readily available	Joy, Longyear
Split barrel sampler with liner	Plastic soils	Drive or press	12 — 24 inches	1 7/16 to 2 15/16 inches	Sample recovery and quality questionable below	Disturbed core sample	Readily available	Joy, Longyear
Split barrel sampler "Maine type"	Sands, silts, clays	Drive or press	16 inches	3 1/2 to 5 inches	Sample recovery and quality questionable below	Disturbed core sample	Readily available	Joy, Longyear
Double tube continuous drive sampler	Sands, silts, clays	Drive	60 inches	2 7/8 inches	Sample recovery and quality questionable below	Not core sample; disturbed material	Commercially available on special order	Penndrill
M.I.T. sampler with retainer and piano wire	Clays	Drive	30 inches	5 inches	Satisfactory below with normal care	Undisturbed core sample	Commercially available on special order	Sprague and Henwood
Square tube sampler	Clays	Drive	24 inches	2x2 inches square	Satisfactory below with normal care	Undisturbed core sample	Operational but user fabricated	Wilson (1969)
Wit sampler with membrane retainer	Sands, silts, clays	Drive	12 inches	2 1/2 inches	Relatively trouble free below	Undisturbed core sample	Research and development	Wit (1962)
Delft mud sampler	Sands, silts, clays	Drive	2 inches	30 to 60 ft	Relatively trouble free below	Disturbed core sample	Research and development	Begemann (1961)
Fixed piston, thin-walled sampler (Hvorslev type)	Sands, silts, clays	Drive	36 inches	3 to 5 inches	Relatively trouble free below	Undisturbed core sample	Operational but user fabricated	Mathews (1969)
Free piston sampler	Silts, clays	Drive	24 — 30 inches	2 1/2 to 2 7/8 inches	Relatively trouble free below	Disturbed core sample	Commercially available on special order	Mobile Drill
Hydraulic fixed piston thin-walled (Osterberg type)	Sands, silts, clays	Drive	48 inches	2 3/8 to 4 7/8 inches	Relatively trouble free below	Undisturbed core sample	Readily available	Soiltest
Retractable plug sampler	Sands, silts, clays	Drive	6 inches	7/8 inch	Relatively trouble free below	Not core sample; disturbed material	Readily available	Acker, Mobile Drill, Soiltest, Sprague and Henwood.
Stationary piston sampler	Sands, silts, clays	Drive	24 — 54 inches	1 7/8 to 4 7/8 inches	Relatively trouble free below	Undisturbed core sample	Readily available	Acker, Penndrill, Soiltest, Sprague and Henwood
Stationary piston sampler with liner (Lowe-Acker)	Silts, clays	Drive	6 — 9 inches	2 3/16 inches	Relatively trouble free below	Undisturbed core sample	Commercially available on special order	Acker
Delft foil sampler	Clays, sands	Push	36 inches	2 1/2 inches	Relatively trouble free below	Undisturbed core sample	Research and Development	Begemann (1961, 1971, 1974)

**Table 10. -- (Continued)**

Sampling technique	Recommended geologic conditions for best results	Method of penetration	Length of sample held in barrel	Core diameter	Water table influence	Core quality	State of development	Source <sup>1</sup>
Foil sampler with rotary coring bit	Sands, silts, clays	Rotate	Up to 36 ft	2 11/16 inches	Satisfactory below with normal care	Undisturbed core sample	Research and development	Broms and Hallen (1971), Fukuoka (1969)
Swedish foil sampler	Sands, silts, clays	Push	Up to 70 ft	2 11/16 Inches	Relatively trouble free below	Undisturbed core sample	Commercially available on special order	Sprague and Henwood
Double-tube auger	Silts, clays	Rotate	46 inches	1 1/4 to 2 1/4 inches	Not suitable below water table	Undisturbed core sample	Readily available	Soiltest
Shrouded auger	Sands, silts, clays	Rotate	53 inches	4 1/8 inches	Satisfactory below with normal care	Not core sample; disturbed material	Readily available	Mobile Drill
Open spindle hollow stem auger (most technique)	Silts, clays, sands, gravel	Rotate and drive combination	Variable	Up to 5 1/2 inches	Satisfactory below with normal care	Disturbed core sample	Readily available	Mobile Drill
Rubber sleeved double tube core barrel	Weakly cemented rock; interbedded hard and soft rock; fractured rock; weak rock	Rotate	20 — 30 ft	3 inches	Relatively trouble free below	Core sample	Commercially available on special order	Christensen
Denison type sampler	Sands, silts, clays, weakly cemented rock	Rotate	24 — 60 inches	2 3/8 to 6 5/16 inches	Relatively trouble free below	Undisturbed core sample	Readily available	Acker, Soiltest, Sprague and Henwood
Pitcher sampler	Sands, silts, clays, weakly cemented rock; interbedded hard and soft rock	Rotate	36 inches	3 to 6 inches	Satisfactory below with normal care	Undisturbed core sample	Readily available	Pitcher Drilling Co.
Large diameter swivel type core barrel, core lifter in inner barrel	Weakly cemented rock, interbedded hard and soft rock, fractured rock	Rotate	60 — 240 inches	2 1/8 to 5 15/16 inches	Satisfactory below with normal care	Core sample	Readily available	Acker, Christensen, Longyear, Sprague and Henwood
Swivel type core barrel, core lifter in inner barrel (M-design)	Interbedded hard and soft rock, jointed rock	Rotate	60 — 240 inches	7/8 to 2 13/16 inches	Satisfactory below with normal care	Core sample	Readily available	Acker, Christensen, Longyear, Penndrill, Soiltest
Swivel type core barrel, core lifter in outer barrel (X-design)	Jointed rock	Rotate	60 — 240 inches	7/8 to 2 1/8 inches	Satisfactory below with normal care	Core sample	Readily available	Acker, Longyear, Penndrill, Sprague and Henwood
Swivel type core barrel, retractable triple tube (Australian design)	Weakly cemented rock, interbedded hard and soft rock, strongly fractured rock	Rotate	60 — 120 inches	1 1/8 to 3 11/32 inches	Satisfactory below with normal care	Core sample	Readily available	Triefus Industries, Odgers Drilling
Wireline, double tube core barrel	Weak rock, jointed rock	Rotate	60 — 180 inches	1 1/16 to 3 11/32 inches	Satisfactory below with normal care	Core sample	Readily available	Sprague and Henwood, Acker, Boyle Bros., Christensen, Longyear, Reed, Reese
Wireline, double tube core barrel with liner	Weakly cemented rock, interbedded hard and soft rock, fractured rock, weak rock, jointed rock	Rotate	60 — 180 inches	1 5/16 to 3 1/4 inches	Satisfactory below with normal care	Core sample	Readily available	Longyear
Orienting double tube core barrel	Interbedded hard and soft rock, weak rock, jointed rock	Rotate	60 — 120 inches	1 5/8 to 5 7/8 inches	Satisfactory below with normal care	Core sample	Readily available	Christensen
Bishop sand sampler	Sand	Push	15 inches	2 3/8 inches	Relatively trouble free below	Undisturbed core sample	Operational but user fabricated	Serota and Jennings (1957), Bishop (1948)

<sup>1</sup> Sources listed without a date are manufacturers or distributors. Addresses for these manufacturers are given in Appendix IV.

**Table 11. -- Methods for developing water wells**

<b>Method</b>	<b>Advantages</b>	<b>Disadvantages</b>
Over-pumping	Convenient methods for small wells or poor aquifers.	Not adequate for large wells; will not develop maximum efficiency in a well; tends to cause sand to "bridge" in the formation; requires the use of high capacity pumping equipment.
Back-washing	Can effectively reduce "bridging."	Fine sand, mud, silt, or clay can be washed into the well from the formation; not effective unless combined with surging, bailing, or pumping; large quantities of water required.
Surge-plungers	Low cost; convenient to use for Cable-tool rigs.	Can produce unsatisfactory results when an aquifer contains clay because the casing or screen can collapse if it becomes plugged with mud; sometimes the well seal can be disturbed when surging.
Compressed air	Rapid method.	Where yield is very weak and draw-down rapid, or submergence is low, other methods will be more satisfactory.
High velocity jet	Most effective method; simple to apply.	
Blasting	Rapid method.	Used for solid rock wells only.
Acidizing	Rapid method.	Used for limestone aquifers only.

screens are made of iron, brass, stainless steel, fiberglass, and plastic. The size of perforations, slots, or screen openings are chosen after the particle size distribution of water-bearing zones are determined from samples taken during drilling.

## Gravel Packing

Often a drill hole is larger than the outside diameter of the casing so a gravel pack is used to stabilize the formation. The annular space around the well screen or perforations is gravel packed to prevent materials above the water table from caving or slumping into the water producing zone. Gravel packing is also used in unconsolidated formations of fine uniform sand or layered deposits.

Screen openings or perforations are chosen so that 90 percent or more of the gravel pack material will be retained. It is recommended that a gravel pack be 3 to 8 inches thick. The gravel pack material should be clean, well-rounded, quartz grains.

## Well Sealing

Often it is necessary to protect a water producing zone from contamination by water from other aquifers or from the surface by grouting the well. Grouting is accomplished by filling the annular space around the casing with a slurry of Portland cement, bentonite, perlite, Gilsonite, diatomaceous earth, or other materials.

## Well Development

Well development after drilling and casing accomplishes the following: 1) clays, silts, and fine sands are removed from around the aquifer and well; 2) the porosity and permeability of the formation is increased; 3) material around the screens or perforations is stabilized so that the well yields sand-free water; and, 4) clogging and compaction of the formation which occurs during drilling is corrected. Table 11 lists the commonly used methods for developing wells.

## GEOPHYSICAL LOGGING METHODS

Well logging is the recording of various geophysical properties of the strata (formations) penetrated by a drill hole. Logging operations are performed by lowering measuring probes or "sondes" into a drill hole on an insulated cable. The measurements are recorded at the surface as the sonde is pulled out of the hole. The recording device at the surface produces a graph of the borehole versus the depth of penetration (fig. 6). Depending upon the nature of the sonde, a number of geophysical properties of the geologic strata and its contained fluids including electrical, radioactive, and acoustical can be measured.

Down-hole geophysical logging methods are well established techniques in the petroleum industry for use in identifying potential reservoir rocks and for determining their porosity and permeability and the nature of fluids present. From the standpoint of overburden analysis an equally important aspect is the ability to identify rock units and to correlate these units between wells. Particular rock formations may yield log curves with distinctive patterns (fig. 6, 7) making it possible to correlate not only major lithologic (rock type) breaks, but many points within the formations themselves (Telford and others 1976, p. 772). Much of the up-to-date methodologies on advancements in down-hole geological logging are found in petroleum related literature. Geophysical logs have been run on a routine basis for years in the petroleum industry and are now being run on a more routine basis than in the past in mining exploration. They hold a great potential for providing geochemical, geotechnical, and assay data from noncored drill

holes. The best results are obtained when geophysical logs can be calibrated against core from a cored hole (Dames and Moore 1975, vol. II, p. 92). Principles of geophysical well logging are discussed in chapter 11 of Telford and others (1977) and in chapter 13 of LeRoy and others (1977). The various methods of down-hole geophysical logs commonly used in the evaluation of mineral deposits are reviewed by Scott and Tibbetts (1974). Bond and others (1971) discuss the various well logging techniques used in the coal mining industry and Tixler and Alger (1970) discuss the geophysical log evaluation of nonmetallic mineral deposits. Table 12 (modified from Dames and Moore 1976) presents a list of the more common geophysical logging techniques along with their uses and recommended conditions.

## SUBSURFACE HYDROLOGIC MEASUREMENTS

The purpose of subsurface hydrologic measurements is to provide information sufficient to determine the quantity of ground water, direction and magnitude of ground water flow, recharge, and the relationship between ground and surface waters. The configuration of the piezometric surface or water table, hydraulic conductivity, transmissivity, and storage characteristics of each aquifer system are required. Piezometric surface and water table data are determined from static ground water elevation measurements and the hydraulic coefficients are determined from the observation of the time rate of change of ground water elevation during aquifer tests.

## Water Surface Elevation Measurements

A permanent reference point, from which all depth-to-water measurements are made, should be established at each well. A notch in the well casing or other indication of a particular reference point will suffice. The elevation of each reference point (measuring point) is established relative to a common datum (preferably mean sea level) with an accuracy of at least 0.1 ft. The depth to water from the reference point is measured and the water surface elevation, rela-

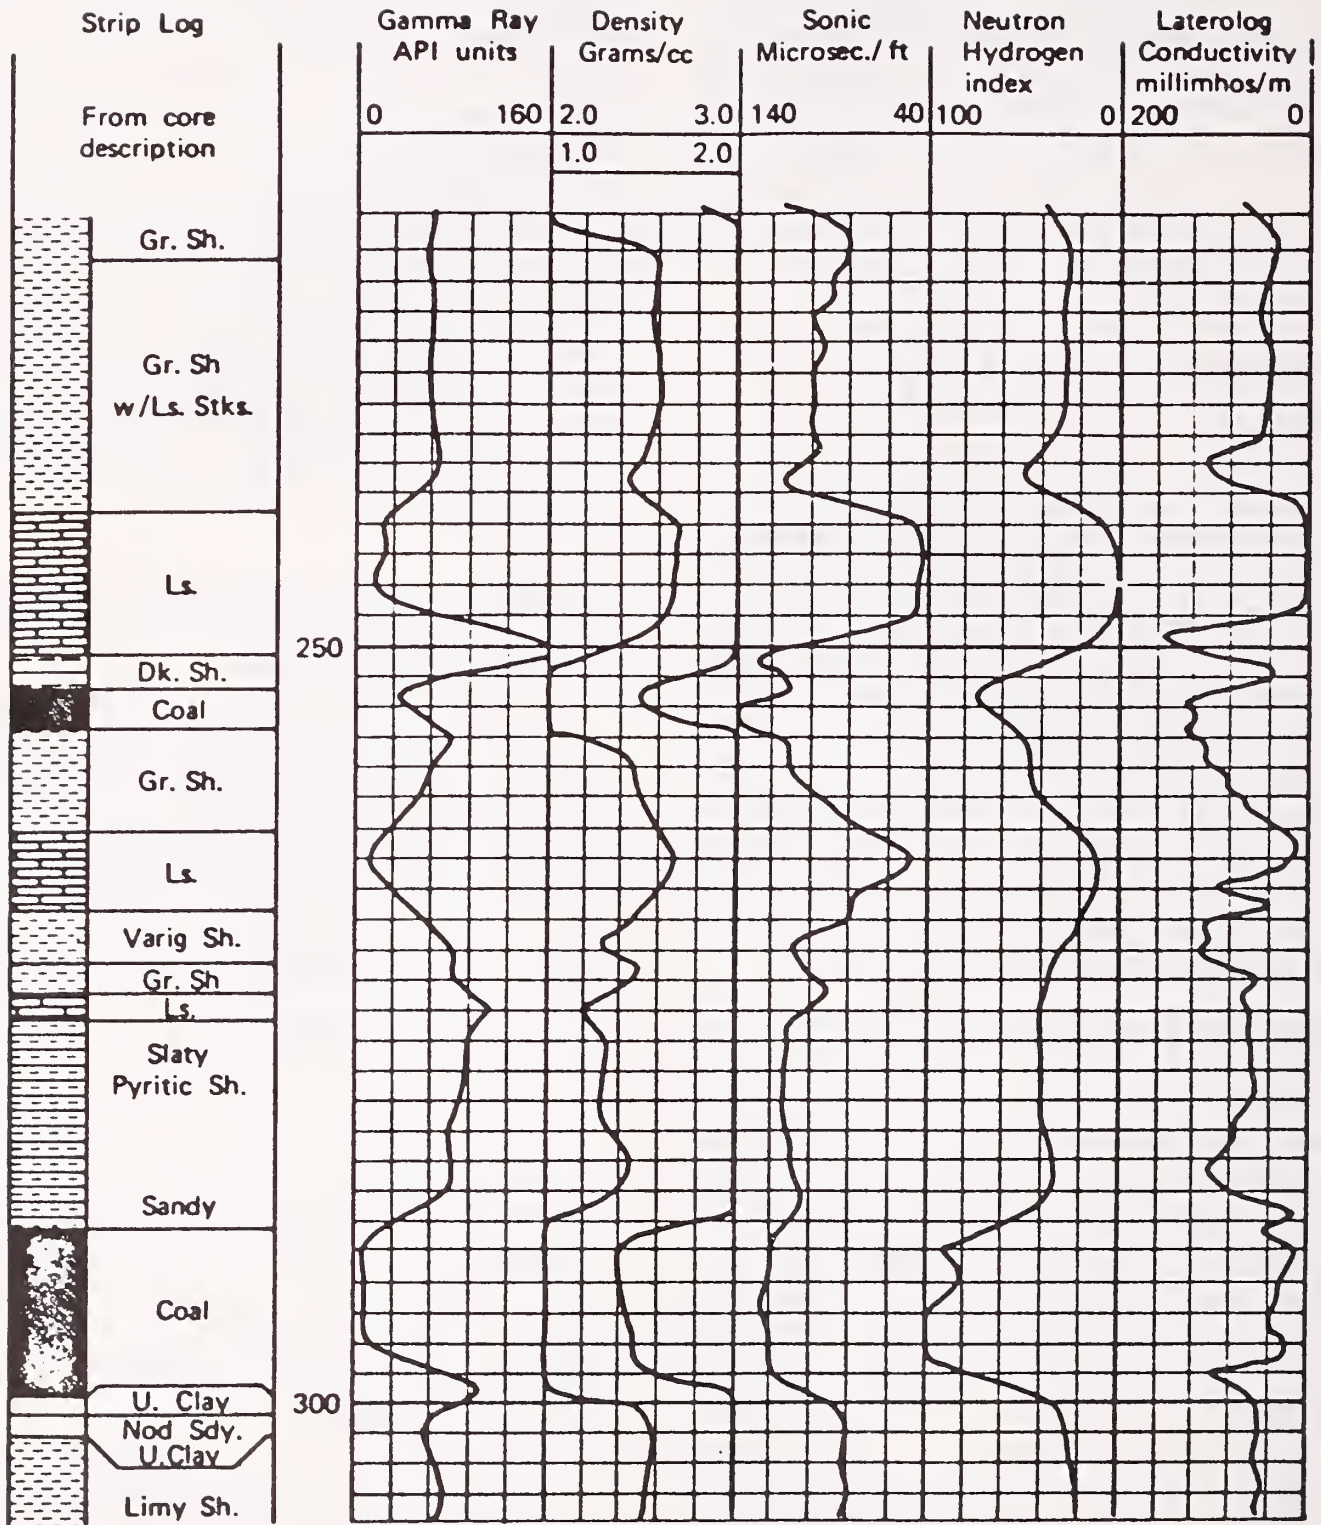


Figure 6. Geophysical log curves from a coal field exploration drill hole showing correlation between various rock types and log shapes (From Jenkins, 1969, fig. 2, p. 11. Used by permission of the American Institute of Mining, Metallurgical and Petroleum Engineers, Inc.).



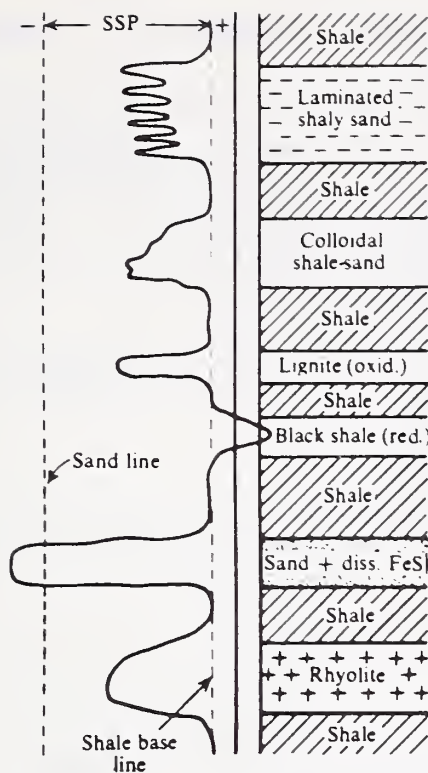


Figure 7A. Characteristics of SP curves for various rock units (after Telford and others 1976, p. 785).

tive to the datum, is determined. These data are used to prepare contour maps that depict the configuration of the piezometric surface and/or the water table.

Depth-to-water measurements can be made in a variety of ways (Garber and Koopman 1968; U.S. Department of the Interior 1977). Static water levels are conveniently and accurately measured with a chalked steel tape with a weight attached. The lower end (usually 5 to 10 ft) of the tape is coated with chalk. The chalked portion is lowered into the well until part of the chalked portion is wetted by the water standing in the well. The wetted portion changes shade, permitting the investigator to determine the distance between the reference point and the water level. The depth-to-water can be read to a precision of 0.01 ft. Accuracy of the depth-to-water will depend upon the degree to which the tape hangs plumb from the reference point, the temperature relative to the tape's calibration temperature and other factors.

The necessity for withdrawing the tape from the well for each determination creates a serious disadvantage when several measurements must be made over small time intervals as in the

case of aquifer testing. An electrical or acoustical sounder does not have this disadvantage. An electrical sounder consists of a spool of length-calibrated, insulated electrical cable, a water level sensor, an indicator meter, and a battery. Upon contact with the water surface, an electrical circuit is completed which causes the meter to deflect. The operator raises and lowers the probe slightly to find the exact point of contact with the water surface. The cable is usually calibrated in 5 ft intervals and interpolation between markers with a measuring tape is required. A precision of 0.01 ft can be achieved with practice. Accuracy is substantially affected by kinking of the cable and frequent calibration with a steel surveyor's tape is recommended.

The acoustical sounder consists of a steel tape with a resonator attached to the lower end. The resonator is usually a hollow cylinder about 2 inches long and 3/4 inch in diameter, capped on the upper end. The resonator makes a dripping or popping noise when contact is made and

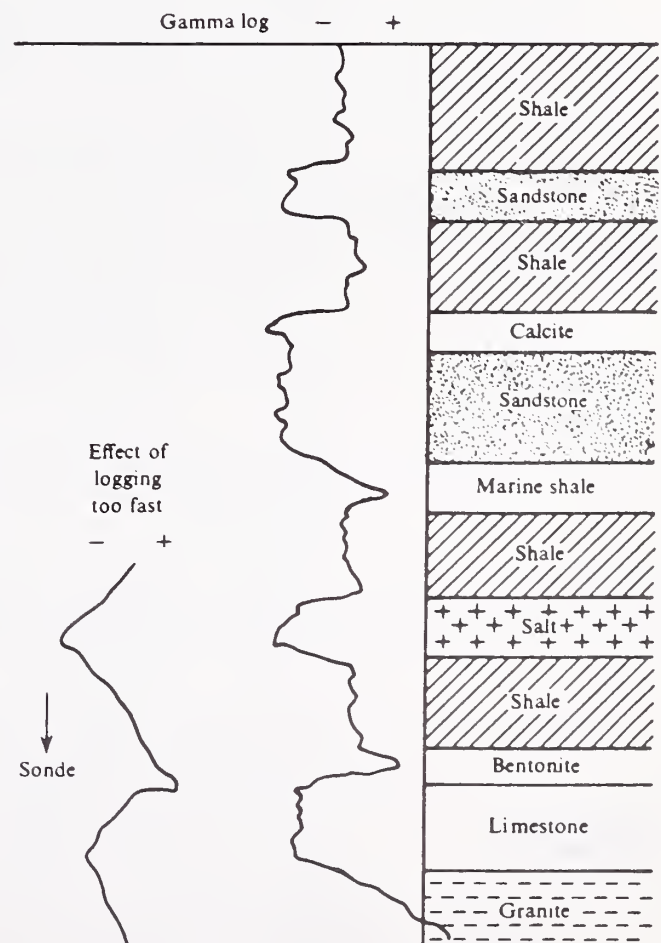


Figure 7B. Typical gamma ray log curve for various rock units (after Telford and others 1976, p. 793).

**Table 12. — Standard down-hole geophysical logging methods (modified after Dames and Moore, vol. II, 1976, p. II-94 and II-95)**

Method	Uses	Recommended conditions
<b>Electric logging:</b>		
Single electrode resistance	Determining depth and thickness of thin beds. Identification of rocks, provided general lithologic information is available. Correlation of geologic formations or beds. Determining casing depths.	Fluid-filled uncased hole. Fresh mud required. Hole diameter less than 8 to 10 inches.
Short normal (electrode spacing of 16 inches)	Picking tops of resistive beds. Determining resistivity of the invaded zone. Estimating porosity of formations (deeply invaded and thick interval). Correlation and identification of geologic formations provided general lithologic information is available.	Fluid-filled uncased hole. Ratio of mud resistivity to formation – water resistivity should be 0.2 to 4.
Deep lateral (electrode spacing approximately 19 inches)	Determining true resistivity where mud invasion is relatively deep. Locating thin beds.	Fluid-filled uncased holes. Fresh mud. Formations (rock units) should be of thickness different than electrode spacing and should be free of thin limestone beds.
Limestone sonde (electrode spacing of 32 inches)	Detecting permeable zones and determining porosity in hard rock. Determining formation factor in sites.	Fluid-filled uncased hole. May be salty mud. Uniform hole size. Beds thicker than 5 ft.
Laterlog	Investigating true resistivity of thin beds. Used in hard formations drilled with very salty muds. Correlation of formations, especially in hard rock regions.	Fluid-filled uncased hole. Salty mud satisfactory. Mud invasion not too deep.
Neutron	Delineating formations and correlation in dry or in cased holes. Qualitative determination of shales, tight formations, and porous sections in cased wells. Determining porosity and water content of formations, especially those of low porosity. Distinguishing between water or oil-filled or gas-filled reservoirs. Combined with gamma-ray log for better determination of lithology (rock type) and correlation of formations. Indicates cased intervals. Logging in oil-based muds.	Fluid-filled or dry cased or uncased hole. Formations relatively free from shaly material. Diameter less than 6 inches for dry holes. Hole diameter similar throughout.
Density	Used as a porosity logging tool. Other uses include identification of minerals in evaporite deposits, detection of gas, determination of hydrocarbon density, evaluation of shaly sands and complex lithologies, and detecting grout.	Fluid-filled or dry uncased hole.
<b>Induction logging</b>	Determining true resistivity, particularly for thin beds (down to about 2 ft thick) in wells drilled with comparatively fresh mud. Determining resistivity of formations in dry holes. Logging in oil-based muds. Defining lithology and bed boundaries in hard formations. Detection of water bearing beds.	Fluid-filled or dry uncased hole. Fluid should not be too salty.
Microlog	Determining permeable beds in hard or well consolidated formations. Detailing beds in moderately consolidated formations. Correlation in hard rock regions. Determining formation factor in sites in soft or moderately consolidated formations. Detailing very thin beds.	Fluid-filled uncased hole. Bit-size holes (caved portions of hole only logged if enlargements are not great).
Microlaterlog	Determining detailed resistivity of flushed formation at wall of hole when mudcake thickness is less than 1/8 inches in all formations. Determining formation factor and porosity. Correlation of very thin beds.	Fluid-filled uncased hole. Thin mudcake. Salty mud permitted.
Spontaneous potential	Helps delineate boundaries of formation and the nature of these formations. Determine values of formation-water resistivity. Qualitative indications of bed shaliness.	Fluid-filled uncased hole. Fresh mud.
<b>Radiation logging:</b>		
<b>Gamma ray</b>	Differentiating shale, clay, and marl from other formations. Correlation of formations. Measurement of inherent radioactivity in formations. Checking formation depths and thickness with reference to casing collars before perforating casing. For shale differentiation when holes contain very salty mud. Radioactive tracer studies. Logging dry or cased holes. Locating cemented or cased intervals. Logging in oil-based muds. Locating radioactive ores. In combination with electric logs for locating coal or lignite beds.	Fluid-filled or dry cased or uncased hole. Should have appreciable contrast in radioactivity between adjacent formations.

Table 12. – (Continued)

Method	Uses	Recommended conditions
<b>Sonic logging</b>	Logging acoustic velocity for seismic interpretation. Correlation and identification of lithology. Reliable indication of porosity in moderate to hard formations, in soft formations of high porosity it is more responsive to the native rather than the quantity of fluids contained in pores.	Not affected materially by the type of fluid, hole size, or mud invasion.
<b>Temperature logging</b>	Locating approximate position of cement behind casing. Determining thermal gradients. Locating depth of lost circulation. Locating active gas flow. Used in checking depth and thickness of aquifers. Locating fissures and solution openings in open holes and leaks or perforated sections in cased holes. Reciprocal-gradient temperature log may be more useful in correlation work.  Locating point of entry of different quality water through leaks or perforations in casing or opening in rock hole. Determining quality of fluid in hole for improved interpretation of electric logs. Determining fresh-water-salt-water interface.	Cased or uncased hole. Can be used in empty hole if logged at very slow speed, but fluid preferred. Fluid should be undisturbed (no circulation) for 6 to 12 hours minimum before logging; possibly several days may be required to reach thermal equilibrium.  Fluid required in cased or uncased hole. Temperature log required for quantitative information.
<b>Fluid-velocity logging</b>	Locating zones of water entry into hole. Determining relative quantities of water flow into or out of these zones. Determining direction of flow up or down in sections of hole. Locating leaks in casing. Determining approximate permeability of lithologic sections penetrated by hole or perforated section of casing.	Fluid-filled cased or uncased hole. Flange or packer units required in large diameter hole. Caliper log required for quantitative interpretation. Injection, pumping, flowing, or static surface conditions.
<b>Casing-collar locator</b>	Locating position of casing collars and shoes for depth control during perforating. Determining accurate depth reference for use with other types of logs.	Cased hole.
<b>Cement bond logging</b>	Used to assess the quality of the cement-to-casing bond around a cemented casing.	Cased hole.
<b>Caliper (section gage) survey</b>	Determining hole or casing diameter. Indicates lithologic character of formations and coherency of rocks penetrated. Locating fractures, solution openings, and other activities. Correlation of formations. Selection of zone to set a packer. Used in quantitative interpretation of electric, temperature, and radiation logs. Used with fluid-velocity logs to determine quantities of flow. Determining diameters of under-reamed sections for placement of gravel pack. Determining diameter of hole for use in computing volume of cement to seal annular space. Evaluating the efficiency of explosive development of rock wells. Determining construction information on abandoned wells.	Fluid-filled or dry cased or uncased hole. Does not give information on beds behind casing in a cased hole.
<b>Dipmeter survey</b>	Determining dip angle and dip direction (from magnetic north) of a bedding plane in relation to the well axis. A comprehensive study of computed data from a dipmeter survey makes possible the identification of faults, unconformities, cross bedding, sand bars, reefs, channels, deformation around salt domes, and other structural anomalies.	Fluid-filled uncased hole. Directional survey (see below) required for determination of true dip and strike (generally obtained simultaneously with dipmeter curves).
<b>Directional (inclinometer) survey</b>	Locating points on a hole to determine deviation from the vertical. Determining true depth. Determining possible mechanical difficulty for casing installation or pump operation. Used in determining true dip and strike from dipmeter survey.	Fluid-filled or dry uncased hole.
<b>Magnetic logging</b>	Determining magnetic field intensity in borehole and magnetic susceptibility of rocks surrounding hole. Studying lithology and correlation, especially in igneous rocks.	Fluid-filled or dry uncased hole.

broken with the water surface in the well. The precision of this method is about 0.02 ft. The accuracy is affected by factors previously noted. This method will not be suitable when pump or other noise is sufficient to mask the sound of the resonator.

In cases where the piezometric surface elevation is above the top of the well casing, the well is equipped with a cap that is drilled and tapped in a way suitable for attachment of a pressure gage or mercury manometer. The readings from the pressure gage or manometer are converted to water pressure head and added to the elevation of the measuring point to determine the piezometric surface elevation.

None of the above described methods are suitable for continuous (or nearly continuous) measurements of water levels. Continuous water level records are useful for correlation of water level changes with precipitation and barometric pressure changes. Continuous water level measurements are usually made by attaching a float and a weight to opposite ends of a beaded cable. The cable is suspended over a pulley attached to a drum. As the float elevation changes in response to water level fluctuations, the drum is rotated. The rotation of the drum is recorded by an ink trace on coordinate paper wrapped about the drum. The ink marker is driven laterally along the drum with time by a spring or battery powered clock. A record of the depth-to-water over time is produced. Continuous water level recorders are produced commercially; the Stevens Type F recorder is one example. Independent measurements of the water level should be recorded on the chart each time the chart is changed to insure an accurate starting point for each chart.

## Hydraulic Coefficients of Aquifers

Essentially all quantitative studies of ground water require the determination of the capacity of the water bearing materials to store and transmit water. In confined (artesian) aquifers the capacity to store water is characterized by the storage coefficient defined as the volume of water released from storage from a column of aquifer of unit cross-sectional area and length equal to the aquifer thickness when the piezo-

metric head is reduced by one unit (McWhorter and Sunada 1977). The storage coefficient is a dimensionless number and usually is in the range of  $10^{-6}$  to  $10^{-3}$ . The storage coefficient for coal and overburden aquifers in Colorado, Montana, and Wyoming is often about  $10^{-5}$ .

In unconfined (water table) aquifers the capacity to store water is characterized by the apparent specific yield, defined as the ratio of the volume of water added or removed directly from the saturated aquifer to the resulting change in the volume of saturated aquifer (McWhorter and Sunada 1977). The apparent specific yield is dimensionless and usually is in the range of 0.05 to 0.3.

Hydraulic conductivity (also known as permeability) is the coefficient in Darcy's law that relates the discharge per unit area in a particular direction to the rate of change of piezometric head with respect to distance measured in that direction. When the hydraulic conductivity is multiplied by the thickness of the aquifer, the resulting coefficient is called transmissivity.

A large number of field tests have been devised for the determination of the hydraulic coefficients. The basic idea behind all such tests is to create a flow in the aquifer that can be described mathematically, to measure one or more aquifer responses to the created flow, and to determine the hydraulic coefficients by fitting or matching the measured response to the theoretical response.

Field tests vary tremendously in regard to expense, time, and data provided. One of the most important determinants of expense is number of observation wells required for the test. For example, tests conducted on an individual drill hole are less expensive than full scale aquifer tests that require at least one additional well for the observation of aquifer response. Nearly always, there is a trade-off between the expense of the test and quantity and quality of information obtained.

Table 13 is a summary of several available test methods that can be used to determine the hydraulic coefficients of aquifers. A brief description of the actual procedures to be followed for each test are contained in the following para-

**Table 13. — Summary of aquifer test methods**

Test	Reference	Major items required	Parameters obtained	Comments
Pumping	McWhorter and Sunada 1977; U.S. Department of the Interior 1977; Stallman 1971; Walton 1962; Ferris and Knowles, 1963; Ferris and others 1962.	Minimum of one observation well and preferably four or more; pump; power source; winch; tripod, mast or boom; discharge measuring device; stop watch; water level sounder.	T,K,S	Yields parameter values averaged over a relatively large aquifer volume; most commonly used when accuracy and reliability is of high priority; best results in aquifers with good continuity and permeability provided by inter-granular flow channels; can provide evidence of leakage through aquitards, directional permeability, and the presence of hydrogeologic boundaries. Relatively expensive, doesn't work well in very tight aquifers, requires a power source.
Draw-down/ specific capacity	Walton 1970; U.S. Department of the Interior 1977.	Same as above, but no observation wells are required.	T,K	Yields only rough estimates of T and/or K; storage coefficient or apparent specific yield must be estimated independently; conditions immediately adjacent to the well bore, well losses, etc., substantially effect results; in tight aquifers the effects of well-bore storage may be highly important. Relatively inexpensive; most useful in reconnaissance investigations.
Recovery	Same as for pumping test.	Same as for drawdown/ specific capacity.	T,K,S	Recovery should always be monitored following a drawdown/specific capacity test; usually yields more reliable values for T and K than the drawdown/specific capacity test; has the additional advantage of providing an estimate of storage coefficient or apparent specific yield; because the rate of recovery is dependent upon the preceeding pumping rate the results are effected by well-bore storage. Minimum expense in addition to that incurred during the pumping period and provides additional and more reliable information than the drawdown/specific capacity test.
Pressure pump-in	U.S. Department of the Interior 1977.	Inflatable or compression packers; pump; power source; pressure gages; stop watch; in-line discharge measuring device; storage capacity and source for water.	T,K	Usually conducted during exploration or reconnaissance investigations; permits determination of T and K in different intervals along the well bore; can be used above or below the water table or water level in the well; works best in consolidated aquifers or perforated well casing. Relatively expensive because it is usually conducted during the drilling operations using the contractors rig and equipment.
Slug/ falling head	McWhorter and Sunada 1977; U.S. Department of the Interior 1977; Ferris and Knowles 1963; Kvorslev 1951; Papadopulos and others 1967; Bouwer 1978.	Equipment required depends upon the manner in which the slug is added or removed. Pump may be used but is not required.	T,K	One of the simplest and least expensive of all tests; does not require a power source; yields values acceptably accurate for most purposes; analysis procedures available that account for aquifer storage only, well-bore storage only, or both. Applicable in both confined and unconfined aquifers.
Auger hole	Boast and Kirkham 1971.	Small pump or bail; stop watch; float.	K	Applicable in cases of unconfined aquifers when the water table is within a few feet of ground surface; inexpensive, rapid, reliable.

T = transmissivity;  
 K = hydraulic conductivity;  
 S = storage coefficient or specific yield.

graphs. Data analysis procedures are discussed in a subsequent section of the handbook.

Regardless of the type of test selected, the holes must be properly conditioned to insure a free transfer of water to and from the aquifer. This is usually accomplished by surging, pumping, bailing, wall scratchers, or some combination of these procedures. The importance of these operations cannot be over emphasized.

### *Pumping Test*

A pumping test is conducted by measuring the water level drawdown in the pumped well and one or more observation wells in response to pumping at a constant and measured rate. All well construction data should be known in detail. Pumped water must be disposed of so that it does not recharge the aquifer during the test. The duration of the test can range from a few hours to several days. Long test periods usually provide better results but are more expensive.

Observation well location is important, and the projected duration of the test, probable aquifer properties, and whether or not the pumped well is fully penetrating should be considered in the selection of well spacing. In most coal and overburden aquifers in the Rocky Mountain region, transmissivities are small and the cone of drawdown does not expand rapidly. Estimates of the time rate of expansion of the drawdown cone can be made by procedures outlined by McWhorter and Sunada (1977). Rough estimates of pumping rate, transmissivity, and storage coefficient are required. In very tight aquifers, at least one well should be within approximately 50 ft of the pumped well to insure measurable drawdowns within a test period of a few hours. Highly heterogeneous overburden caused by highly variable and discontinuous strata also dictate close spacing of the observation wells. The observation wells should be open for flow only in the stratigraphic interval being tested. When several observation wells are to be used, one-half of the total number should be located on a line passing through the pumped well and the remainder on a similar line at right angles to the first. This procedure may permit detection of directional permeability, for example.

The above described pumping test has been used widely for estimation of transmissivity and storage coefficient of aquifers supplying water to industry, agriculture, and municipalities. The pumping test becomes less suitable for aquifers that exhibit low transmissivities, highly variable and discontinuous stratigraphy, and fracture porosity and permeability. Unfortunately, many coal and overburden aquifers in the Rocky Mountain region exhibit all of these characteristics, and even, properly planned tests have sometimes failed to provide data sufficient to justify the expense of such elaborate tests.

### *Drawdown/Specific Capacity Test*

This test is conducted by measuring the drawdown in the pumped well during the pumping period. The pump discharge must be maintained as nearly constant as possible. Ideally, the measured drawdowns can be analyzed to provide estimates of transmissivity and storage coefficient. Usually it is possible to estimate only transmissivity, however, and this should be regarded as only a rough estimate.

In very tight aquifers, a very small discharge can be supplied by the aquifer and difficulty with adjusting the pump discharge to a suitable low value is often experienced. Often, a substantial portion of the constant pump discharge is supplied by the water standing in the well, the remainder being contributed by inflow from the aquifer. Measurements of the water level in the well can be used to determine the contribution from wellbore storage and the pump discharge can be corrected to obtain the aquifer discharge. A good deal of inaccuracy is usually involved.

### *Recovery Test*

The recovery test provides estimates of the aquifer properties by measuring the recovery rate of water levels in the pumped well after pumping has ceased. It is especially useful when conditions do not permit the construction of observation wells. More precise data can be obtained during recovery than during the pumping period because water in the well is not disturbed by the pump. Total pumping time, average discharge

rate from the aquifer, and the water level at various times since pumping ceased are measured. Estimates of both transmissivity and storage coefficient are obtained.

In the study of ground water at prospective surface mining sites, the recovery test has been found to be one of the best tests when the information obtained and costs are compared with other methods.

### *Pressure Pump-In Test*

There exist several variations of this test method. One variation is to terminate the drilled hole at the bottom of an interval to be tested. The drill tools are removed and a packer is set at a given distance above the bottom of the hole. Water is pumped into the test section between this packer and the bottom of the well and the flow rate and injection pressures are recorded over a period of time. These data, together with detailed data on depths, test interval, pipe sizes, etc., permit the estimation of the average hydraulic conductivity and transmissivity over the test interval. The packer is then removed, the hole deepened, and the test repeated as desired. Another variation is to drill the hole to total depth and use straddle packers to isolate intervals of interest for testing. The test is started at the bottom of the hole.

The pressure pump-in test has been used extensively for foundation investigations associated with reservoirs, conveyance facilities, and other construction projects. The method has also proven useful in hydrologic investigations, however.

### *Slug/Falling Head Test*

Briefly, the water level in the well is changed instantaneously by the rapid withdrawal or displacement of a volume of water. The water level recovery in the well is measured with respect to time. Slug tests are an economic means of determining local transmissivities near the well. In some types of ground water investigations (tight aquifers), a large number of "point" transmissivities are of more value than a single value of

transmissivity obtained from a long-term pumping test of equal cost (Papadopolulos and others 1973). Slug tests can also be an indicator of the effectiveness of well development. In a properly developed well, the slug test transmissivity should be greater than the long term pump test transmissivity (Papadopolulos and others 1973).

The following considerations should be made prior to conducting a slug test (adapted from Cooper and others 1967):

1. Wells should be fully developed, that is, surged and pumped thoroughly to establish a good transfer of water between the well and aquifer.
2. Wells should completely penetrate the aquifer.
3. Well construction data should be known in detail.
4. Provisions must be made to quickly remove a known volume of water (by bailer) or quickly displace the water with a "slug". A convenient displacement slug is a length of weighted water pipe sealed at both ends (a 3-inch diameter, 10-ft long pipe displaces a volume of about 0.49 ft<sup>3</sup>).

The slug test proceeds as follows:

1. Quickly immerse the slug or remove a known volume of water from the well.
2. Record the time when the slug is immersed.
3. Record the water levels and elapsed time.
4. Make water level readings at 1 or 2 minute intervals for the first several minutes of the test and gradually increase intervals to 10-20 minutes after 1 hour. Half-hour intervals are usually sufficient after 2 or 3 hours.

The falling head test is essentially the same as described above. One variation is to set a packer above the zone to be tested. The head is increased by adding a known volume of water to the stinger pipe extending through the packer. The dissipation of the head is monitored by measuring the water level in the pipe.

## *Auger Hole Test*

This test is useful only when the water table is within a few feet of the ground surface. A hole is augered to a depth that insures the bottom of the hole is a few feet below the water table. A perforated casing is required in materials that tend to cave and bridge the hole. After the hole is cleaned and the water level stabilized, the hole is pumped or bailed dry as quickly as possible. The water level recovery is measured as a function of time, usually by means of a float. The hole depth, hole diameter, depth to the water table, and certain geologic information permit the estimation of hydraulic conductivity. This test is most useful in shallow water table aquifers associated with streams or in perched aquifers.

The above descriptions are provided to give the reader, unfamiliar with such tests, sufficient insight to decide what test or tests may be suitable for a particular problem given a set of financial, time, and equipment constraints. The references provided in table 13 should be consulted for additional details.

## **Laboratory and Greenhouse Studies**

### **SOILS AND GEOLOGIC OVERBURDEN CHARACTERIZATION**

#### **Stratigraphic Framework**

##### *Core Descriptions – Lithologic Logs*

Continuous cores or rock chips and cuttings from bore holes that penetrate the overburden should be described and lithologic logs prepared by qualified geologists or soil scientists. Drillers logs of each borehole may be available; however, reliance should not be placed on these as satisfactory core descriptions. Information contained in these lithologic logs should include at a minimum: project number, core hole location, core hole number, depth from the surface, rock name, color, texture, accessory constituents (gypsum,

pyrite, iron oxide, calcite, etc.), percentage of lost core or intervals of lost or broken core, induction, and general descriptions of each rock unit. A simple lithologic log used for description of cores for the SEAM study site in the Powder River Basin is included (fig. 8). Most mining companies have standard formats for core logs. These formats will vary from company to company. Recently, several computer oriented formats have come into use (Blachet and Godwin 1972; Eckstrom, Wirstam, and Larsson 1975; Godwin and others 1977; Chun 1978; Winczewski 1978; Melton and Frem 1978; Lehmann 1978; Winczewski 1979 a,b). With these methods much of the logged data can be processed by computers and graphically displayed in a standard format.

A color photographic or color slide record of all cores should be made as a permanent record of the cores as soon as possible after core recovery (fig. 9). Samples from continuous cores or cutting should be taken for detailed laboratory studies of mineralogy, texture, and geochemistry of each major rock unit encountered as discussed in the section prior to this. Core samples may also be required for geotechnical data such as the strength of intact rock, discontinuities, hardness and abrasion, blastability, rippability, and general visual assessment of likely engineering behavior of the materials (Dames and Moore, vol. II, 1976). Most of this type of information can only be obtained from cores, whereas it is possible to obtain some stratigraphic data from cuttings alone.

##### *Stratigraphic Studies*

*Definition and importance.* — Stratigraphy is that branch of geology that deals with the study and interpretation of stratified and sedimentary rocks and with the identification, description, sequence (both vertical and horizontal), mapping, and correlation of stratigraphic rock units (Weller 1960). Stratigraphic sequences range from simple, where rock units underlying an area are uniform in thickness and character, to very complex, because of lateral changes in rock type, thickness, presence of unconformities, and/or intense structural implications. An understanding of the stratigraphic framework of the overburden is of fundamental importance to the design of open pit mines, the handling of unde-







**Figure 9. Core from SEAM study site, Powder River Basin, Wyoming.**

sirable and/or toxic materials, the design of reclamation plans, and the understanding of ground water flow patterns.

*Methods.* — Determining the stratigraphic framework of the overburden can be accomplished by evaluation and correlation of some combination of the following down-the-hole records of overburden material: geophysical logs, drill hole cuttings, and continuous cores. The stratigraphic framework cannot be determined on the basis of geophysical logs alone. In areas where no drill hole cuttings or cores are available, outcrop and/or highwall descriptions will provide information for determining the stratigraphic framework of the overburden. Examination of core or cutting data in the field or laboratory provides direct information concerning the physical characteristics of the overburden and provides the basis for interpretation of geophysical logs. Once the relation between geophysical log

patterns and lithologies has been substantiated, the logs become more dependable tools for interpreting overburden lithologies.

When all the information from cores, cuttings, and/or geophysical logs is assembled, the thickness, elevation, distribution, geometry, and variability of the overburden and various rock units within the overburden can be portrayed by some combination of the following visual techniques: isopach maps, cross-sections, fence diagrams, and structural contour maps.

An isopach map is a map in which the shape (distribution, thickness) of a body (a rock unit) is indicated by lines drawn through points of equal thickness. The lines are analogous to contour lines but represent thickness rather than elevations or altitude. A typical isopach map is shown in fig. 10. Isopach maps are useful not only in showing the total thickness of overburden and interburden units within the overburden, but can also be used to show the lateral variation in content of some toxic element within the overburden if thickness measurements are replaced with percentage or parts per thousand, million, etc., values.

A cross-section is a profile portraying an interpretation of a vertical section of the earth (in this case the overburden) (fig. 11A). A fence diagram is a combination of three or more geologic cross-sections showing the relationships of wells to subsurface formations (rock units). When several sections are used together they form a fence-like enclosure, hence the name (fig. 11B.) Cross-sections and fence diagrams are useful for displaying the two and three dimensional attitudes, thicknesses, and distributions of various rock units within the overburden and the overall stratigraphic framework of the area of a proposed surface mine.

A structure contour map is a map displaying contour lines drawn through points of equal elevation on a strata, key bed, or some other horizon in the overburden in order to depict the attitude of the rocks (fig. 12). Such maps will certainly be required of the top and possibly the bottom of all coal seams to be mined in surface coal mining operations.

The number and type of stratigraphic maps, cross-sections and fence diagrams will of course be a function of the complexity of the local

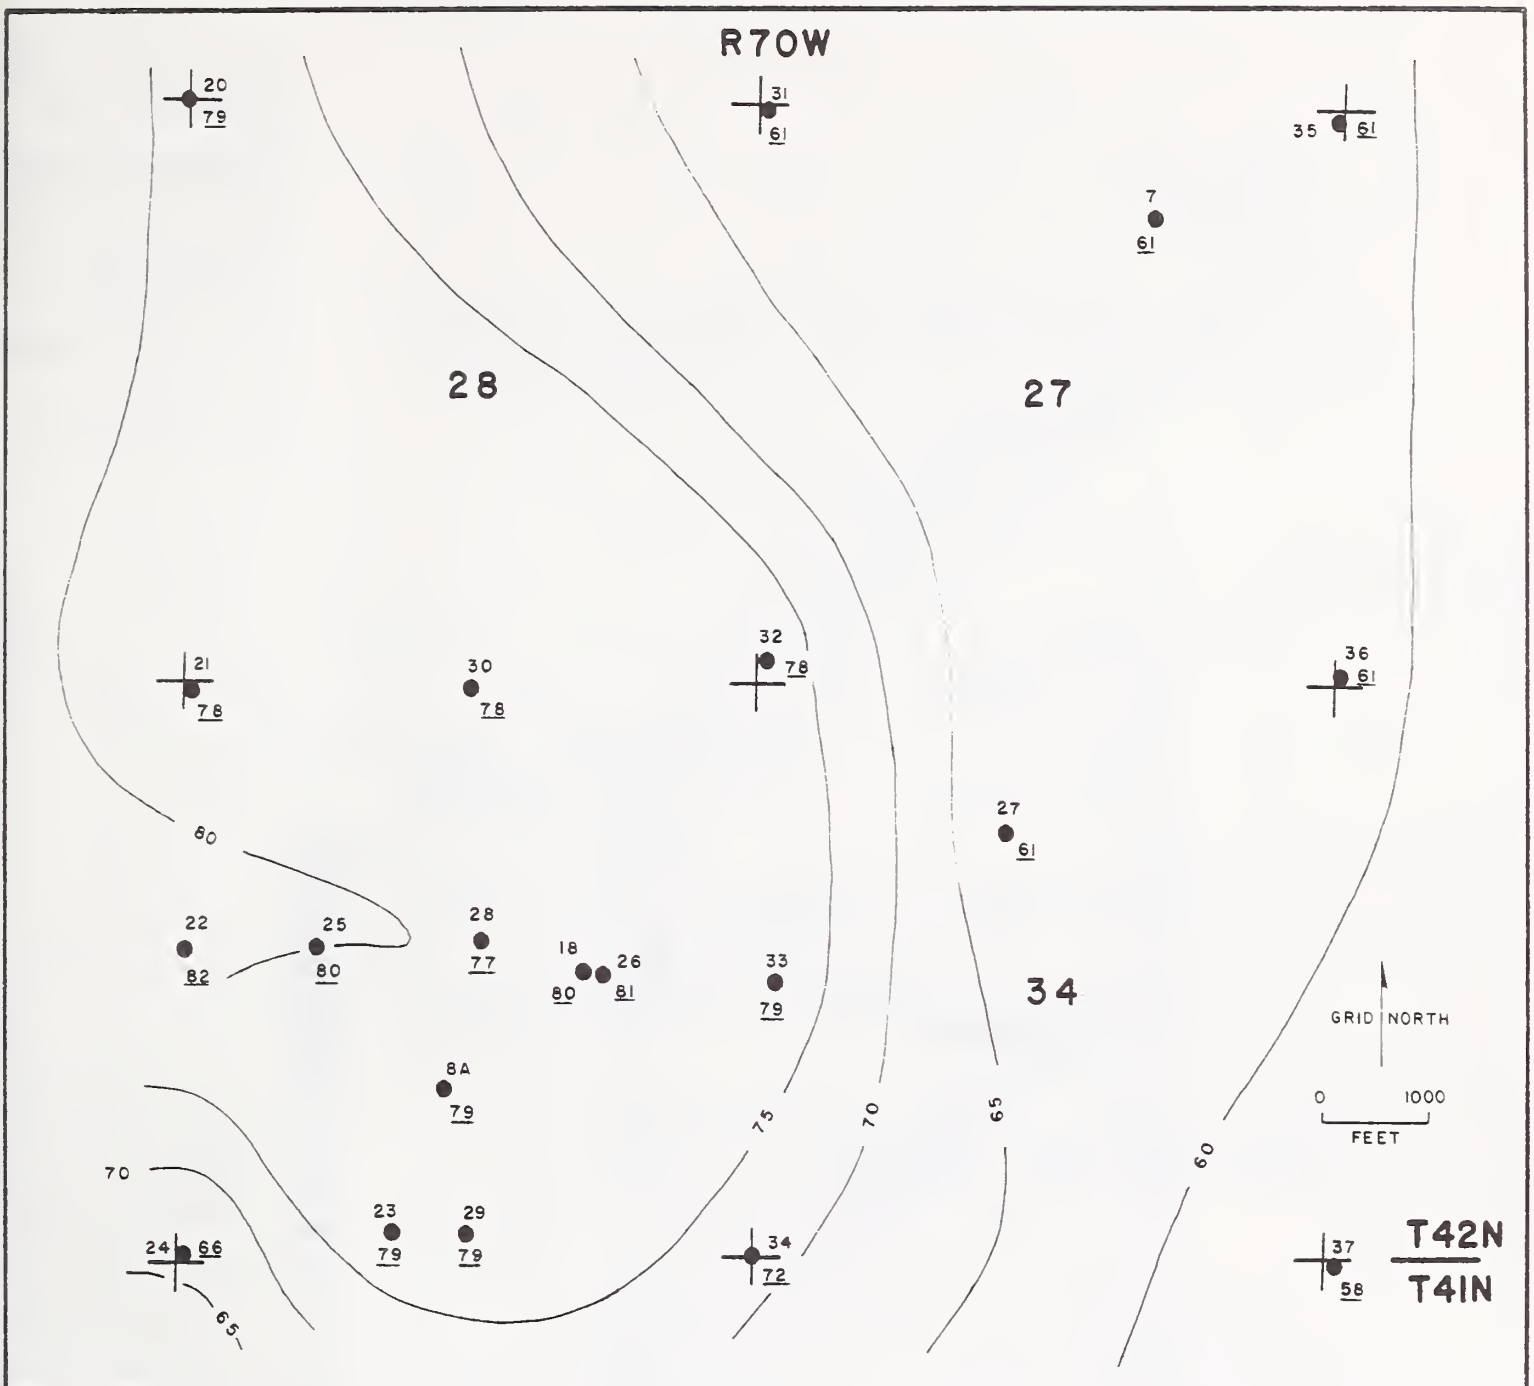


Figure 10. Isopach Map of Anderson Coal Bed, SEAM Study site, Powder River Basin, Wyoming. Thicknesses in feet at each control point are underlined. Contour interval is 5 feet. Interpretation of Isopach Map is found in vol. II of this report.

stratigraphic framework. It seems likely, however, that at least some of these methods will be employed to convey a visual picture of the stratigraphy of the geologic overburden material and the presence and distribution of units that have undesirable characteristics or toxic materials. It should be emphasized that the validity of these maps, cross-sections, etc., is a function of the local stratigraphic complexity, the spacing of drill holes, and the ability of the geologist to recognize key beds or horizons in each drill hole.

## Analyses of Soils and Overburden Samples

### General

The most prevalent problems reported to occur in relation to strip-mine reclamation in western arid-land areas are: (1) shallow topsoil depths and low fertility status of topsoil, subsoils, and overburden; (2) excessive soil salinity and

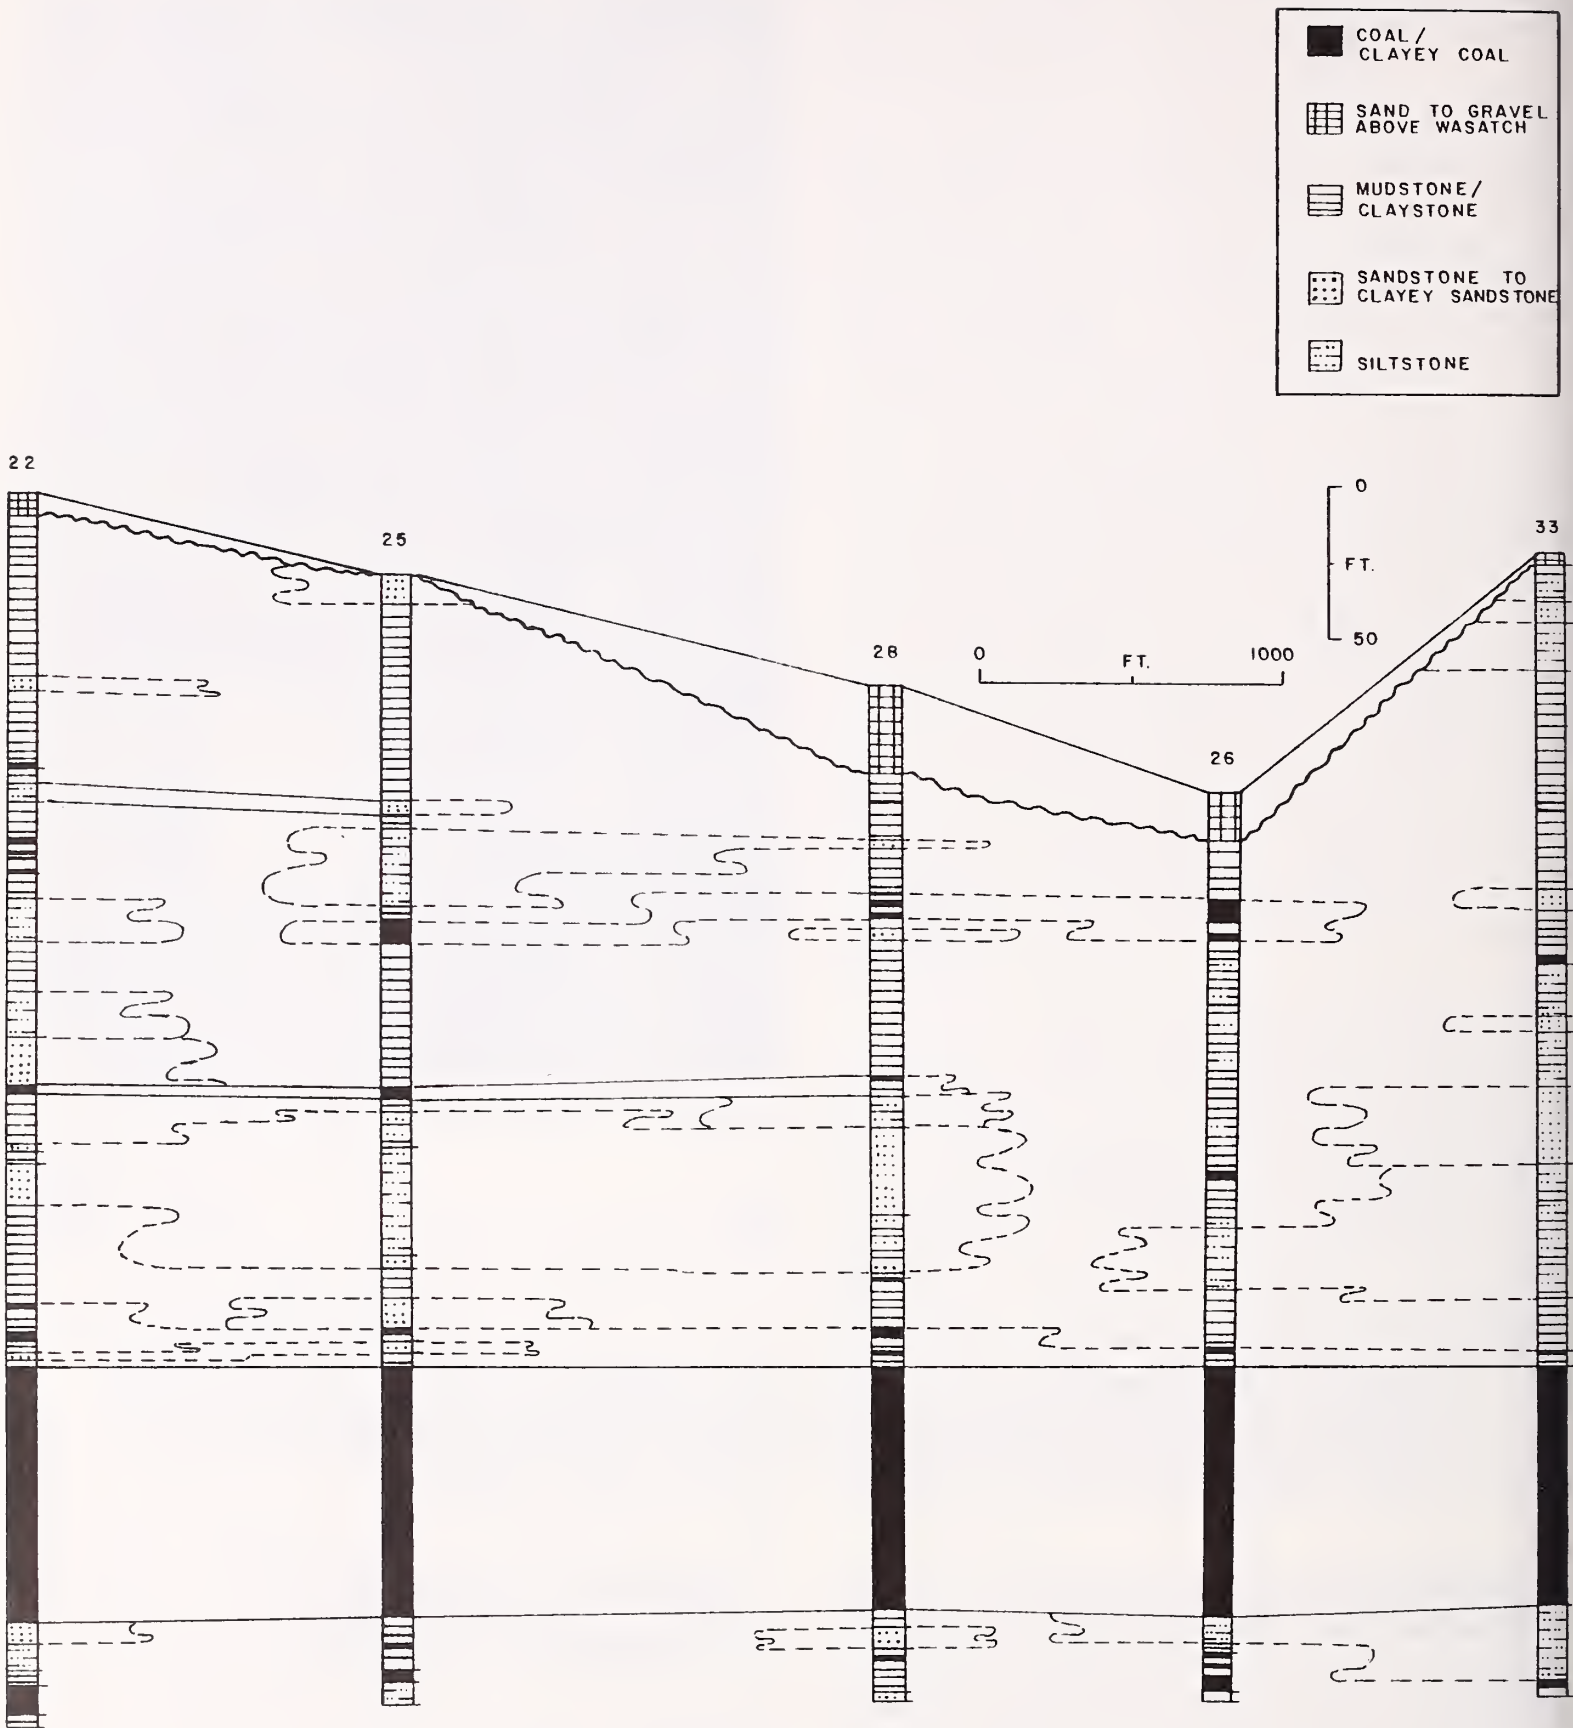


Figure 11A. East-West stratigraphic cross-section across southwest portion of SEAM Study Site, South-Central Powder River Basin, Wyoming. Line of cross-section can be seen by noting location of wells on fig. 10. Interpretation of cross-section is found in vol. II of this report.

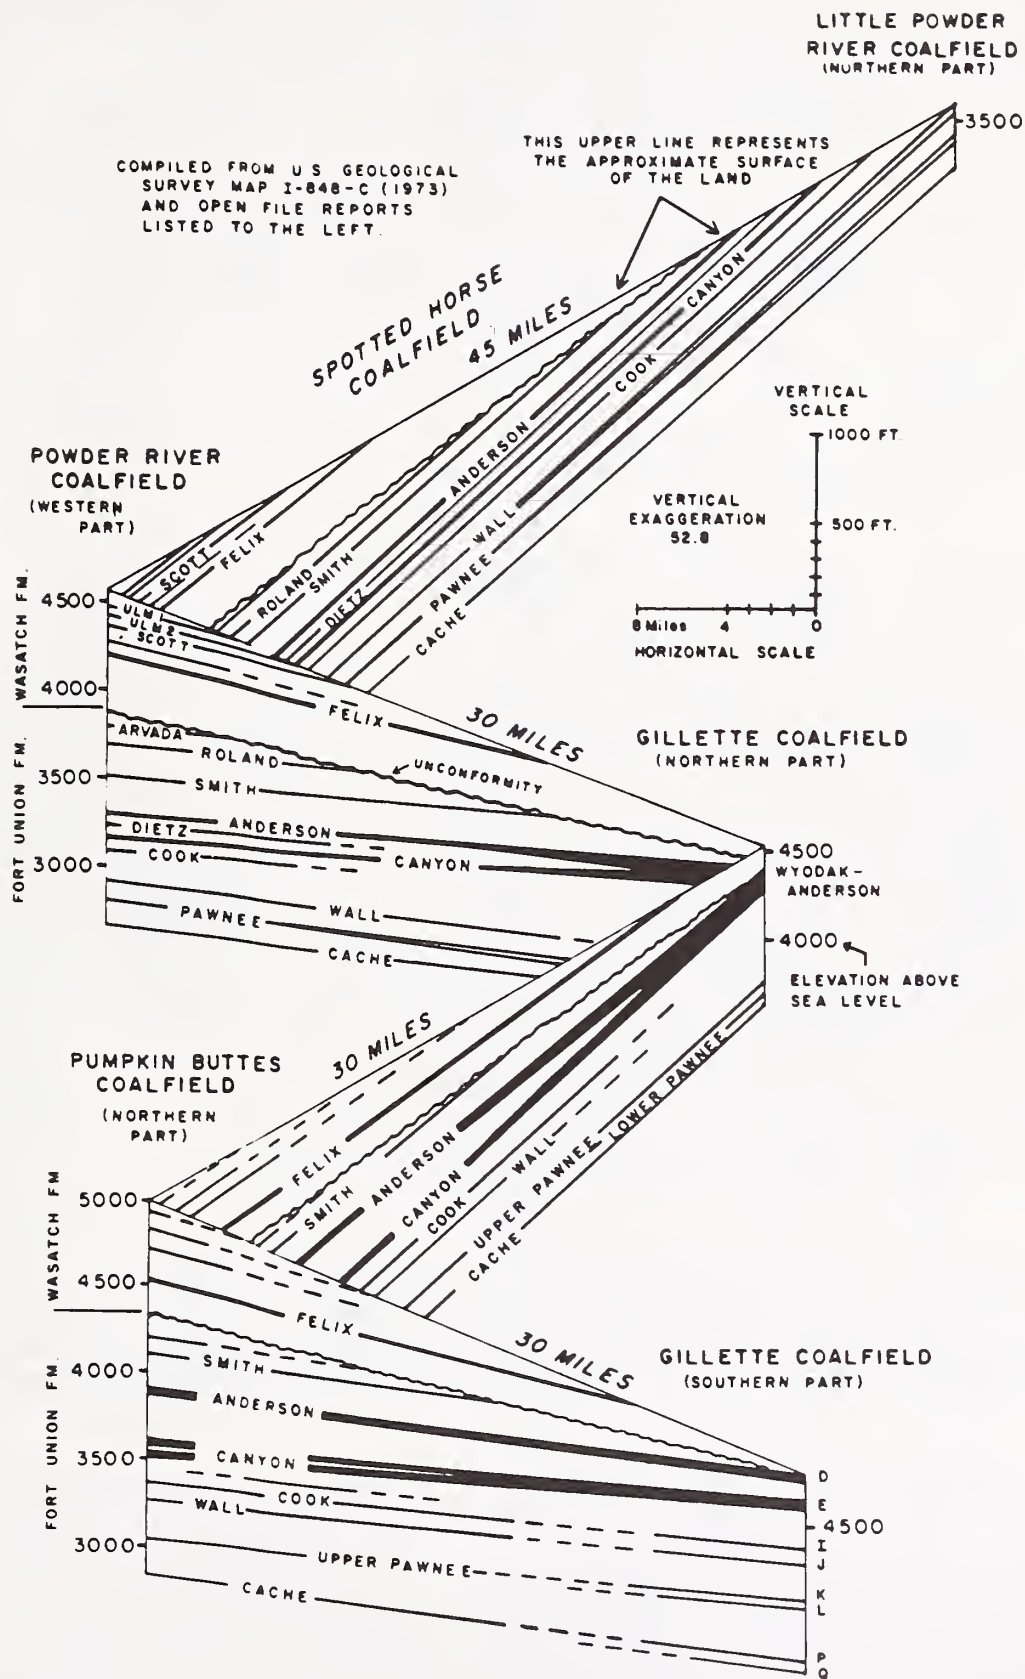


Figure 11B. Fence diagram showing correlation and thickness of major coal seams, Campbell County, Wyoming (after Breckenridge, Glass, Root, and Wendell 1974).

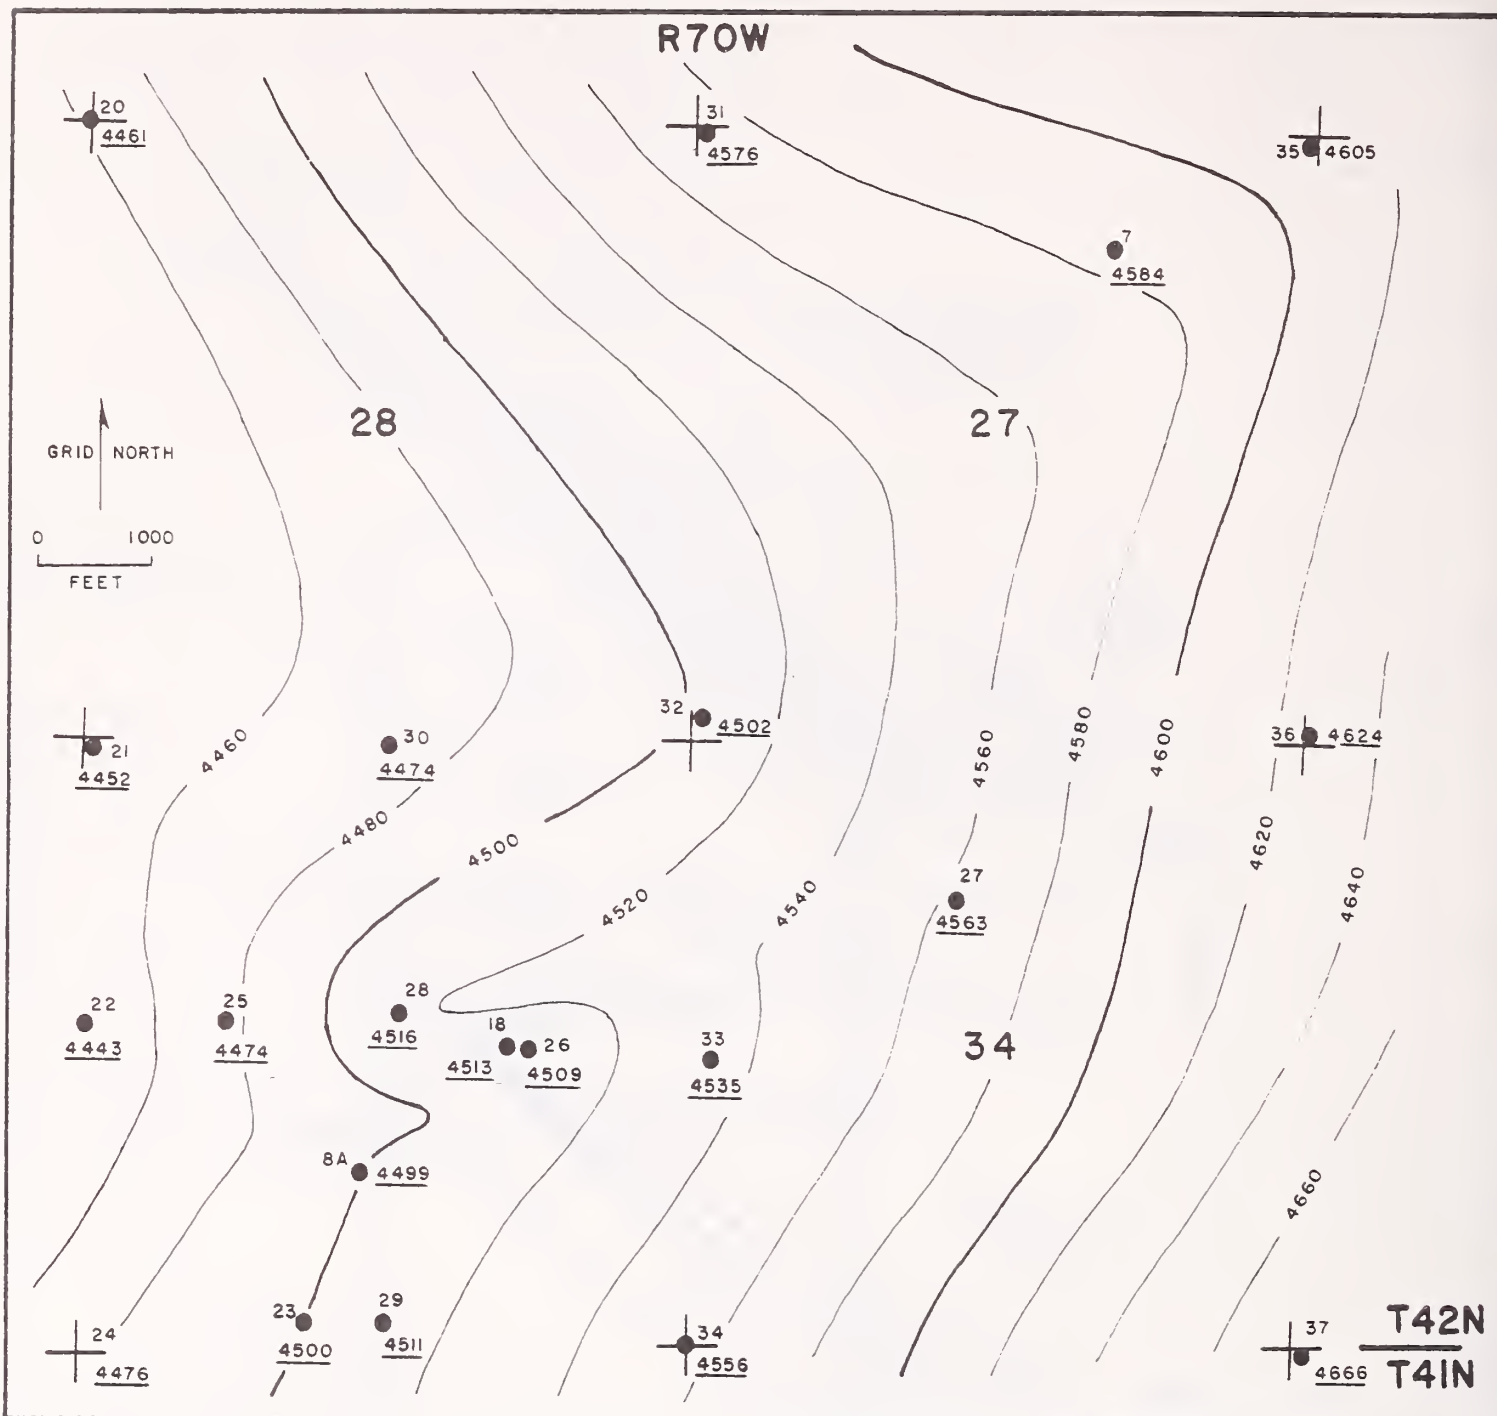


Figure 12. Structure contour map drawn on the top of the Anderson coal bed, SEAM study site, Powder River Basin, Wyoming. Contours are given in feet above sea level. Contour interval is 20 ft . Elevations in feet at each control point are underlined.

exchangeable sodium in soils and overburden; and (3) high clay content of subsoils and overburden. Therefore, the analyses listed in table 14 center around characterizing soil and overburden for these problems. In most cases, the same analytical procedures may be used for both soil and overburden samples. Soil samples should not be taken from cores or cuttings used for overburden characterization, however. Soils should be described and sampled in characterization pits (see page 12 and table 4).

Most of the analyses listed are well-tested and standardized. Thus, the procedures are listed as "acceptable." One procedure source is listed in most cases, a source that is readily available or accessible. It is not intended to restrict the analytical methods or instrumentation used exactly to those used in the procedure cited. Any analytical instrument or method is acceptable that gives comparable or more accurate results or will correlate well with the procedures cited.

**Table 14. — Analyses for characterizing soil and overburden samples**

Soil or overburden	Reported as	Importance of and/or use	Acceptable procedure <sup>1</sup>
<b>Salinity-Exchangeable Sodium-Related Analyses and Calculations:</b>			
Saturated paste	Water saturation – % (SP)	Measure of maximum moisture retention of pulverized (<2 mm) soil or overburden; 1/2 SP gives an estimate of field capacity of unconsolidated material; 1/4 SP gives an estimate of wilting point of unconsolidated material.	USDA Agric. Handb. 525, No. 2, p. 4-6.
Reaction (acidity or alkalinity)	pH of saturated paste (pH <sub>s</sub> ); pH of dilute soil: water suspension, usually 1:5 (pH <sub>d</sub> ); pH is the negative log of hydrogen in activity.	Soil pH aids diagnosis of many different soil problems, such as an indication of free lime or excessive exchangeable sodium; pH is not very reliable when used as the only diagnostic criteria.	USDA Agric. Handb. 525, No. 4, p. 6.
Electrical conductivity saturated paste extract	mmhos/cm @ 25°C (ECx10 <sup>3</sup> )	Rapid measure of water soluble salt content.	USDA Agric. Handb. 525, No. 1, p. 22.
Water soluble cations (Ca, Mg, Na, K)	meq/l; p/m meq/100 g	Indication of cation distribution in soil solution and on cation exchange complex; assessment of salinity and fertility relationships.	USDA Agric. Handb. 525, No. 2, 3, 4; p. 24-27.
Sodium adsorption ratio (SAR)	$\frac{\frac{Na}{Ca + Mg}}{\sqrt{\frac{Ca + Mg}{2}}}$ (calculated in me/1)	Estimation of percent exchangeable sodium (ESP).	USDA Agric. Handb. 60, No. 20b, p. 102.
Potassium adsorption ratio (PAR)	$\frac{\frac{K}{Ca + Mg}}{\sqrt{\frac{Ca + Mg}{2}}}$	Estimation of percent exchangeable potassium (EPP).	USDA Agric. Handb. 60, No. 20b, p. 102.
Water soluble anions (CO <sub>3</sub> , HCO <sub>3</sub> , SO <sub>4</sub> , Cl, NO <sub>3</sub> , B)	meq/l, p/m; meq/100 g	Indication of anion distribution in soil solution; assessment of salinity-fertility relations.	USDA Agric. Handb. 525, No. 5, 6, 7, 11, 12; p. 16-18, 20-22, 27-30.
Ammonium acetate extractable cations (Na, K)	meq/100 g	Determination of exchangeable sodium and potassium.	USDA Agric. Handb. 525, No. 5, p. 7-8.
Cation exchange capacity <sup>2</sup> (CEC)	meq/100 g	Measure of total cation retention.	USDA Agric. Handb. 525, No. 5B, p. 8-9.
Exchangeable sodium percentage (ESP)	Percent	Measure of percent sodium on cation exchange capacity (not reliable for material containing sodium-zeolite).	USDA Agric. Handb. 525, No. 6, p. 9.
Exchangeable potassium percentage (EPP)	Percent	Measure of percent potassium on cation exchange capacity.	USDA Agric. Handb. 60, No. 20, p. 101.
Gypsum	meq/100 g; percent	Measure of solid phase gypsum content.	USDA Agric. Handb. 525, No. 7, p. 10-11.
<b>Fertility-related analyses:</b>			
Calcium carbonate equivalent	Percent; meq/100 g	Measure of alkaline-earth carbonates.	USDA Agric. Handb. 525, No. 3, p. 6.
Organic carbon <sup>3</sup>	Percent (readily oxidized carbonaceous residue of plant material).	Assessment of N and S fertility; stability of soil aggregates.	USDA Agric. Handb. 525, No. 8, p. 12-13.
Total nitrogen	Percent, p/m	Assessment of N-cycling potential in terms of C/N.	USDA Agric. Handb. 525, No. 10, p. 14-16.
Acid permanganate oxidizable soil nitrogen	p/m	Assessment of potentially mineralizable soil nitrogen.	Stanford and Smith, 1978.
Ammonium, nitrate and nitrite	p/m, meq/100 g	Indication of plant available nitrogen.	USDA Agric. Handb. 525, No. 10B, p. 18-20.
Available phosphorus	p/m	Plant availability index.	USDA Agric. Handb. 525, No. 9, p. 13-14; Watanabe and Olsen (1965).
Available potassium	p/m	Plant availability index.	ASA Monograph No. 9, Part 2. Pratt (1965), p. 1027-1030.
DTPA extractable zinc, iron, manganese, and copper	p/m	Plant availability index.	Lindsay and Norvell (1978).

**Table 14. – (Continued)**

Soil or overburden	Reported as	Importance of and/or use	Acceptable procedure <sup>1</sup>
<b>Toxicity-related analyses:</b>			
Active sulfides (qualitative)	Present or absent	Acidification potential.	Neckers and Walker (1952).
Total sulfur	p/m, percent	Assessing acid-base potential.	ASA Monograph No. 9, Part 2. Bardsley and Lancaster, 1965, p. 1103-1108; Steinbergs, and others. (1962).
Acid-base account	Tons per 1,000 tons	Assessment of neutralization of potential acidity by lime.	Smith and others, (1976), p. 293 <sup>4</sup>
Elemental analysis	p/m, percent	Screening for potential heavy metal or other elemental toxicity.	X-ray Spectroscopy, ASA Monograph No. 9, Part 2 Vanden Heuvel (1965), p. 771-819.
Hot water soluble Se	p/m	Assessment of plant toxicity.	ASA Monograph No. 9, Part 2 Fine (1965), p. 1122.
Ammonium oxalate extractable MO	p/m	Assessment of plant toxicity.	ASA Monograph No. 9, Part 2 Reisenauer (1965), p. 1054.
Hot water soluble boron	p/m	Assessment of B-toxicity.	USDA Agric. Handb. 525, No. 12, p. 20-22.
DTPA extractable zinc, iron, manganese, copper, cadmium (and probably other heavy metals.	p/m	Assessment of ion toxicities to plants.	Lindsay and Norvell (1978); Korcak and Fanning (1978).
<b>Physical analyses:</b>			
Particle size analyses	Percent sand, silt, clay (also very fine sand)	Assessment of erosiveness, permeability, water holding capacity, capillary potential inherent fertility.	ASA Monograph No. 9, Part 1 Day (1965), p. 545-566.
Texture	sand, loamy sand, sandy loam, loam, silt loam, sandy clay loam, silty clay loam, clay loam, clay	Assessment of generalized moisture, fertility, and salinity relations.	USDA Texture Classification.
Shrink-swell	Low, medium, high	Assessment of permeability hazard.	ASA Monograph No. 9, Part 1 Holtz (1965), p. 461-63.
Slaking test	Percent particles passing screen	Assessment of induration.	Modification of Smith and others, (1976) vol. 2 (this report).
<b>Mineralogical analyses:</b>			
Pyrite identification	Euhedral phenocrysts, Framboidal; percent; present or absent; size	Assessment of acidification potential and salinity increases.	Petrographic analysis; X-ray diffraction, electron microscopy (Arora and others, 1978).
Clay mineralogy	Clay mineral type; percent	Evaluate moisture and fertility relationships, strata.	ASA Monograph No. 9, Part 1 Ch. 44, 45, 49; p. 568-601, 611-696.
Sand mineralogy	Mineral, matrix, and cement percentages	Evaluate weatherability, strata, and fertility.	ASA Monograph No. 9, Part 1 (1965), p. 604-630.

<sup>1</sup>Reference citations given in literature citation section.

<sup>2</sup>Dispersion of overburden samples by ultrasonic frequency is recommend.

<sup>3</sup>Reagents oxydize reduced sulfides and give high results.

<sup>4</sup>Water soluble sulfate and gypsum should be deducted from total sulfur.



A screening procedure is given for some determinations such as potentially toxic elements and pyrite along with a more quantitative procedure where such acceptable procedures are available.

*Sample Selection Guidelines for Chemical, Mineralogical, Textural and Physical Analyses*

Criteria and guidelines for selecting and handling soil samples for laboratory characterization are given in table 4. Approaches for sampling geologic overburden materials are discussed in the drilling section. The data requirements and sample selection criteria for geologic overburden might be greatly simplified if soils were characterized as to suitability and adequacy prior to overburden characterization. If it were known that adequate amounts of "topsoil" materials were available for reclamation, then fertility and other analyses specifically needed for plant growth characterization could be eliminated. Only those analyses related to environmental hazards of overburden and to mining operations would then be needed. Moreover, the total number of time-consuming analyses could be reduced considerably by a general screening approach for identifying such hazards as pyrite and some potentially toxic elements. A rapid qualitative chemical screening procedure can be used to estimate the relative amounts of pyrite present in overburden strata, for example. A more quantitative procedure can then be used on samples containing detectable amounts of pyrite. Also, a large number of elements can be determined simultaneously on one sample by total elemental analyses with emission spectroscopy. These analyses can serve as a screening method for potentially toxic elements. Samples with high or marginal total elemental concentrations can then be subjected to more specific quantitative analyses for salinity.

If "topsoil" materials were insufficient or were unsuitable as plant growth media, then overburden could be more thoroughly analyzed to assess the possibility of overburden being more suitable as plant growth media than "topsoil." In general, all samples should be representative of the intervals to be sampled (equal amounts of the interval thoroughly mixed) so that the quantitative significance of the analyses can be as-

sessed. Also, it is recommended that enough extra sample be retained so that analyses can be repeated if necessary or for further analysis in case questions arise in the future.

## GROUND WATER AND SURFACE WATER CHEMISTRY

The use of proper sampling procedures for ground and surface water is imperative in order to ensure accurate water quality information. The field investigator must be sure that his sample is representative of the water body under investigation for decisions based upon water quality data are vitally dependent upon sample validity. It has been suggested that improper sampling location may yield the greatest source of error in the entire water quality data acquisition process (Hem 1970). The following is a brief summary of proper sampling procedures; for additional information see Hem (1970) and Rainwater and Thatcher (1960).

### Surface Water Sampling

The following criteria should be considered when establishing a surface water sampling network (adapted from Rainwater and Thatcher 1960):

1. The water is completely mixed and of uniform composition.
2. Each sampling location fits into a comprehensive network for evaluating chemical composition throughout the study area.
3. The data gained from the sampling network can be correlated with information derived from other sampling programs in the area.
4. The sampling location is such that estimates can be made of the amount of total dissolved material discharges from the area.
5. Location of the sampling point is at a transition from the surface outcrop of one geologic formation to another.
6. Location can be used to monitor both pre and postdevelopment water quality.
7. Locations provide information about the water quality upstream and downstream from the development area.

## Ground Water Sampling

Water samples taken from idle, nonpumping wells are usually not representative of the ground water chemistry. Well water above the screened interval is isolated from the aquifer and tends to be stratified and stagnant. Furthermore, this water may contain foreign material from the surface and include chemical compounds derived from the well casing and drilling fluids.

To avoid the collection of nonrepresentative, stagnant water samples, each well should be thoroughly flushed out prior to sampling. For high capacity wells, 3 to 5 times the volume of water contained in the casing should be evacuated to obtain a representative sample. Low capacity wells should be pumped completely dry and allowed to recover; if recovery is rapid, the well should be completely evacuated 2 or 3 times prior to sampling. To ensure complete removal of the stagnant water, the pump screens or discharge line inlet should be placed as near to the well screen as possible.

The following equipment is suitable for the collection of ground water samples: (1) bailers, (2) surface pumps (peristaltic, centrifugal, vacuum), (3) submersible pumps, and (4) air lift equipment.

Care must be taken when using any of these devices for sampling purposes; improper handling and poor sanitation will compromise the worth of the water sample, possibly leading to incorrect management decisions. Specifically, bailers should be used only when it is possible to completely dry out the well by bailing, otherwise the sample is unreliable. Pumps and air lift equipment are probably the best means of collecting ground water samples. Unfortunately, all these devices tend to aerate the water sample which may affect the concentration of heavy metal ions and other constituents. Rapid sample preservation will minimize the aeration effects.

The following data should be collected at each surface and ground water sampling station.

<u>Data</u>	<u>Surface water</u>	<u>Ground-water</u>
Name of water body	X	X
Site location	X	X
Point of collection (pump discharge, etc.)	X	X
Method of collection	X	X
Time and date	X	X
Gage height or discharge	X	X
Temperature	X	X
Collector's name	X	X
Well number		X
Well depth		X
Well diameter		X
Screened interval		X
Static water level		X
Filed conditions	X	X

## Sampling Frequency

Water quality sampling frequency should be such that no important or significant changes in water quality go unnoticed between sampling times (Rainwater and Thatcher 1960). In general, sampling frequency should be proportional to the variability of the water chemistry; stations with high water quality variability should be sampled more frequently than stations with consistent water quality. Obviously, the hydrologist must seek a compromise between the accuracy and detail desired in the water quality record and available funding. In most cases, quarterly or biannual sampling intervals are sufficient for confined ground water quality studies. Unconfined ground water may require more frequent sampling. Higher sampling frequencies are usually required for most surface water stations due to the greater water quality fluctuations brought about by the variability in discharge and meteorological effects.

In some cases it is possible to reduce laboratory analysis costs by measuring a few "indicator constituents" at frequent intervals while performing more expensive complete analyses only when the indicators suggest significant water

quality changes. Possible indicator constituents include temperature, electrical conductivity, pH, hardness, and alkalinity; these measurements should be done in the field.

## Sample Preservation and Constituent Analyses

Sample preservation should never be regarded as absolute, as it is impossible to achieve complete stability for every constituent to be analyzed. Preservation techniques serve only to retard the chemical and biological changes that occur in the sample container. For this reason, it is essential that water samples be preserved as soon as they are collected and analyzed as soon as possible.

Laboratory-grade glass or plastic containers are suitable for the storage of most natural waters. Care should be taken that each sample bottle is absolutely clean. To ensure cleanliness each container should be treated as follows: Wash each bottle thoroughly with detergent, rinse with tap water followed by a nitric acid rinse, rinse again with tap water, and finally, rinse with deionized water. Following this procedure each bottle should be sealed until needed. In the field, each bottle should be rinsed thoroughly with the sample, then filled completely leaving as little entrapped air as possible.

The two most commonly used field preservation procedures are refrigeration and filter/acidification. For the refrigeration method the sample is simply collected in the sample bottle then immediately cooled to below 4° C using ice or other means. The advantages with this method are that little sampling equipment or chemicals are needed and the procedure is simple. This method may not be practical, however, when sampling warm water or during hot days because large quantities of ice are required to ensure adequate cooling and preservation. If a constant temperature below 4° C cannot be maintained, then the filter/acidification procedure must be used. Filter/acidification requires the following equipment: prefilter papers, 0.45 μ filters, filter chamber (USGS or Skogstadt type), nitric acid, zero-impurities grade nitrogen gas (required only when minor elements or heavy metals are to be analyzed).

A portion of the water sample is placed in the pressurized filter chamber and forced through the filters at pressures below 15 psi. The filtered fraction is then stored in two separate portions; a 1 liter portion that has been filtered and then acidified with nitric acid to a pH of 2.0 and a 250 ml portion that has been filtered only. Also, 250 ml of raw water should be sampled in addition to the filtered portion. Each sample bottle should be labeled according to its field treatment; the nitric acid should be added directly to the 1 liter portion in the sample bottle. All water samples should be kept as cool as possible and out of direct sunlight regardless of the preservation method.

Due to preservation difficulties, some water quality parameters must be analyzed in the field in order to obtain accurate data. Analyses that must be done in the field include: temperature, electrical conductivity, pH, alkalinity, dissolved oxygen, carbonate, and bicarbonate.

The following parameters should be analyzed in connection with premining, mining, and postmining water quality monitoring programs (from Wyoming Department of Environmental Quality, Division of Land Quality Guidelines #4):

pH	arsenic	mercury
temperature	cadmium	nickel
total dissolved solids	calcium	nitrate (or N)
electrical conductivity	chromium	phosphorus
alkalinity	copper	potassium
hardness	flouride	selenium
carbonate	iron	sodium
bicarbonate	lead	sulfate
aluminum	magnesium	zinc
ammonia	manganese	

For uranium mines add: redox potential, molybdenum, vanadium, uranium, and radium.

For surface water add: dissolved oxygen, and total suspended solids.

The significance of each of the above constituents is discussed in United States Environmental Protection Agency (1976). It may not be necessary to analyze for all of the above in every case, of course. The composition and levels of constituents found in initial sampling should be used as a guide for analysis of subsequent sampling.

## GREENHOUSE STUDIES AND PLANT TISSUE ANALYSES

Perhaps one of the greatest problems facing both laboratories providing data and planners and land managers receiving these data is "interpreting" the meaning of many of the soil chemical and biological assay data that is being required for assessing the suitability of soil and/or geologic overburden as plant growth media. Public pressure has forced them into performing tests before they were ready with data needed to interpret these tests.

Thus, a serious gap exists for which calibration data is needed. This information can be supplied in several ways — through laboratory and/or greenhouse studies which give only partial answers; or through field studies which require long periods of time and are subject to loss because of weather, diseases, etc., and the results of which are not always easily transferred from one site to another; or by a combined greenhouse, laboratory, and field experimental program. The latter approach is perhaps the most economical and efficient in terms of time and reliability.

The purpose of this section is not to infer that greenhouse and associated soil and plant diagnostic studies should always and everywhere be considered. Rather, the information is provided to encourage mining companies and/or agencies to develop research programs that are needed to fill critical data gaps.

The usefulness of greenhouse and plant tissue analyses studies has long been demonstrated in soil test-plant nutrient correlation studies on agronomic crops. And it seems fair to say that this approach is compatible as a basis for studying these same relationships associated with mined-land reclamation. Differences between them are probably more by degree than actual.

When one considers the multitude of conditions that exist in terms of soils, crops, or vegetation types; climatic conditions; and management alternatives associated with areas in which surface mining is taking place, it becomes apparent that field trials cannot, in a practical sense,

be carried out in sufficient time to provide the calibration data needed. Greenhouse and associated soil and plant diagnostic techniques should be considered as a viable screening mechanism for identifying the nature and extent of potential soil-plant nutrient deficiencies and/or toxicities that might be associated with the soil-plant systems being managed. Data furnished from these types of studies can serve as a useful tool in premining evaluation of soil and/or overburden materials, as well as being a reliable basis for determining the variables that should be included in field experiments.

Some considerations that should be kept in mind in developing these types of studies are:

1. Sample selection and collection. Materials should be sampled on the basis of what factors are to be studied.
2. Amount of material. This will vary depending on the extensiveness of the study involved. The experimental design should include a minimum of 2 replications and pot size should be 1/2 to 1 kg. Thus, if an experiment required 10 treatments and 2 replications (20 pots) the amount of material required would be a minimum of 10 to 20 kg. The amount of material collected should also consider laboratory needs.
3. Type of crop.
4. Type of soil and/or plant analyses to be performed.
5. Sample preparation. Material should have a particular size where most of the material falls into the < 2 mm size range. If coarse or consolidated materials are ground, it is desirable to avoid crushing too fine.

Note: Criticism has been made concerning grinding materials for greenhouse study. It must be recognized, however, that the part of the soil material that influences plant growth most significantly is the < 2 mm fraction material.

6. Experiment design. Should be developed jointly by the researcher and those desiring the research to be performed.

## FIELD REVEGETATION AND STABILIZATION STUDIES

It would appear that field experiments to evaluate existing site conditions may be useful. For example, sampling of plants as well as soil materials for laboratory analyses would provide an excellent means for evaluating the soil-plant nutrient deficiency and/or toxicity potentials that currently exist. In addition, treatment of existing soil-plant systems with fertilizer and/or soil amendments can help to indicate the nature and degree of response to treatments that may be proposed for reclaimed areas. In effect, these types of studies would provide baseline data for conditions as they currently exist, which in turn can serve as a basis for evaluating soil-plant relationships that might occur after land disturbance by mining.

As in the case of greenhouse and plant analyses studies, the foregoing discussion does not infer that field experimentation is always and everywhere needed for obtaining data in developing a reclamation plan. Again, this section of the report is provided to encourage, where possible, the implementation of field investigations to provide needed and useful information.

In addition, a program should be developed to address two distinct activities: (1) laboratory and greenhouse research to provide basic correlation and calibration data, and (2) field experimentation to provide a mechanism for transferring laboratory and greenhouse studies into interpretations that apply to the environments where the reclamation activities are taking place.

Field experimentation needs relative to problems associated with reclamation in the Western United States, as reported by various researchers, include erosion, species adaptability, fertility needs, potential plant and animal toxicity, and salinity and sodium problems. Appendix I contains some useful references concerning these factors and should be reviewed so as to benefit from previous research efforts.

The main purpose of this section is to provide a summary of "principles of field experiments." Basically, the principles of field experimentation are as follows:

## Describing the Component Parts of the System which will Affect the Experiment

These are:

1. Communities of plants being grown or being proposed. Choice of plants to be used could come from an assessment of current soil-vegetation relationships.
2. Soil characteristics.
3. Climatic conditions.
4. Associated biological entities — weeds, insects, diseases, and animals that might destroy plots.
5. Cultural and management practice alternatives.

## Selection of Experimental Sites

Criteria are:

1. *Uniformity.* — Sites must be selected where uncontrolled variables are the same over the entire experimental site, (depth of soil, kind of topsoil and subsoil material, etc). Selecting the experimental site for uniformity of uncontrolled variables will minimize experimental error and the number of replications needed.
2. *Number of replications.* — Enough field studies have been conducted to suggest that a minimum of 4 replications per treatment are needed to minimize experimental error. Also, it is important to remember that uniformity within a plot is essential, particularly when there is variability within the entire experimental site.

## Variables to be Studied

We should identify and define the kind and level of uncontrolled variables as well as the controlled variables. In other words, the controlled variables might be a study of the effect of various mulches in controlling erosion. Soil fertility may be an uncontrolled variable. The fertility status of the soil should be determined because it may be a limiting factor that affects response to the

controlled variables. In this case, it may be desirable to apply a standard rate of fertilizer over the entire study area to eliminate this variable as a limiting factor.

## Plot Design

Selection of a plot design is critical because different plot design techniques allow for greater or lesser precision in controlling experimental error, either by accommodating or not accommodating site variability and/or combinations of treatments. Randomized complete block and split-plot designs are most commonly used. A useful reference for determining a plot design suited for the type of experiments proposed is LeClerg and others 1962.

In addition, plot design should consider the data analyses portion of the research. The principle types of field experiments now desired are those that will provide multiple regression ana-

lyses which relate responses to different variables and to their interactions. Field experiments should be designed for this purpose.

## Site Protection

We recognize that the establishment of field experiments often attract animals of various kinds, (gophers, rabbits, mice, deer, antelope, elk, etc). Because field experiments are costly to establish, a site protection plan — namely fencing — is essential. The possibility of pests such as grasshoppers invading the site also must be considered.

In summary, field experimentation, supported by laboratory and greenhouse studies, is the primary mechanism for establishing critical plant nutrient deficiency and/or toxicity criteria. The “state of the art” is inadequate for assessing many of the “data interpretive” questions being asked.

# DATA EVALUATION AND APPLICATION

## Geologic Overburden

From the standpoint of mine land reclamation the following questions should be addressed in mining and reclamation plans and environmental reports: What are the nature and magnitude of both the beneficial and the adverse affects resulting from the proposed surface mining activity? What actions must be taken to mitigate or minimize any possible environmental damage (adverse effects)?

Specific adverse effects that might need addressing in mining, reclamation and environmental reports include:

1. Handling of overburden rock units that are highly acidic, saline, or sodic and units that contain high levels of phytotoxicants (particularly heavy metals).

2. Constitution of a suitable soil or subsoil material from overburden rock units should mining operations result in excessive disruption of marginal surface soils.

3. Final contouring of surface and reestablishment of surface drainage after backfilling operations are completed to minimize subsequent erosion and to optimize surface runoff from the mined area (Keefer and Hadley 1976).

The geologic data base that should be available to aid in answering these questions and in recognizing and addressing these adverse effects includes:

1. Maps of the exploration area showing the surface topography and the location of boreholes, pits, roads, etc.

2. A detailed geologic map showing the types of surface materials, location of potential borrow deposits, and geologic hazards.

3. Lithologic and geophysical logs of boreholes. Photographs of cores and lists of all retained cores and/or cuttings, and methods used for backfilling all boreholes and pits.

4. Geologic cross-sections showing soil and rock types and rock structure within the proposed mine area.


5. Isopach maps of the topsoil, the overburden and interburden, and the host rock or coal seam. Ratios of overburden to host rock or coal seam thicknesses.

6. Structural contour maps showing the subsurface elevations of the floor of the host rock or coal seam and the subsurface elevations of major rock units that contain high levels of toxic or undesirable materials.

7. Records of all geochemical, mineralogical, and textural analyses.

8. A narrative summary of the conditions of the exploration site to include: regional geology and seismicity; surface conditions and topography; physical, mineralogical, and geochemical characteristics of the overburden and interburden material; nature and extent of toxic materials present in the overburden; and geologic hazards.

It is readily apparent from a review of the literature that there is a lack of information concerning the physical and chemical characteristics of geologic overburden materials in many potential surface mine areas in the Western United

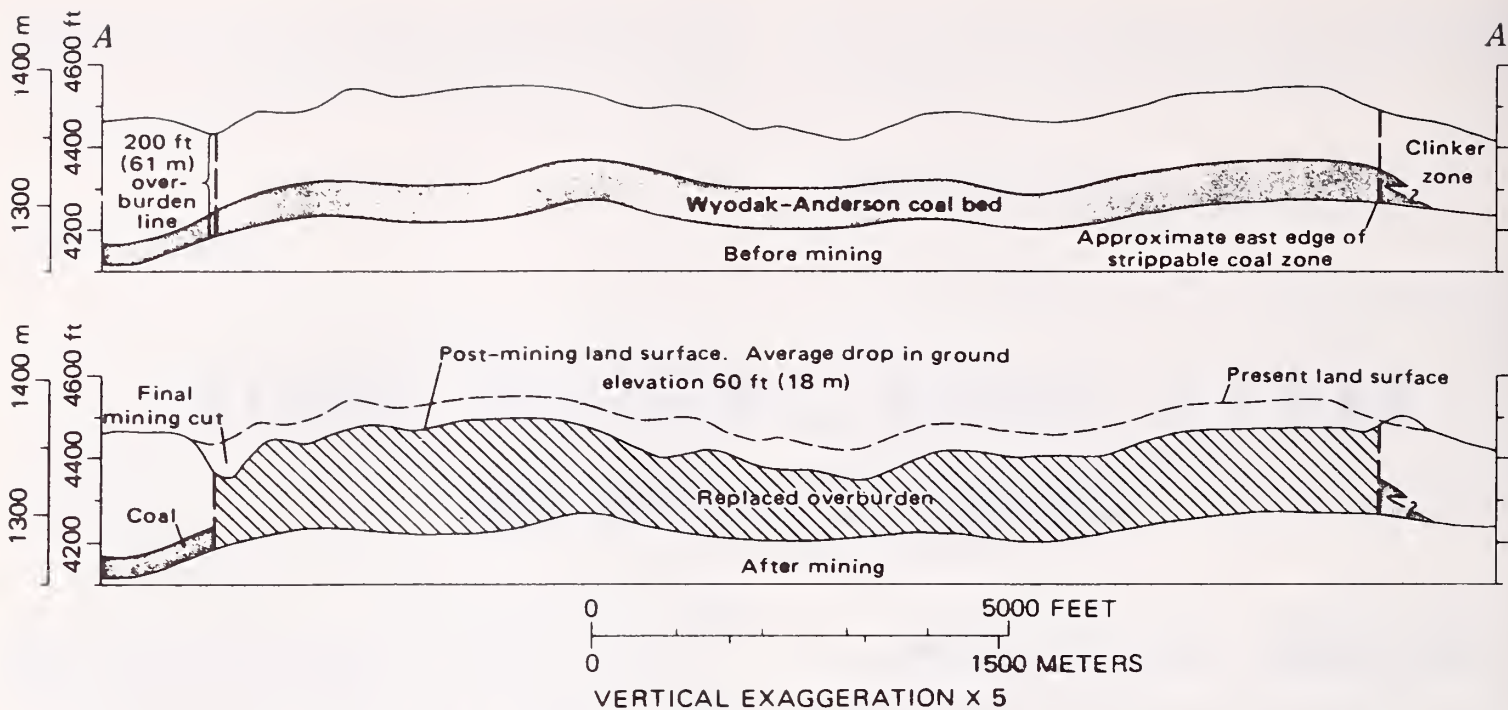

**Figure 13. Cross-section showing potential changes in topography resulting from surface mining in the Gillette area, Wyoming. Lower section is based on assumption that overburden is replaced on a cut-by-cut basis with 200 ft wide (60-m-wide) cuts, spoils are smoothly graded, high walls, are graded to a 3:1 slopes, and overburden expands 20 percent. (from Keefer and Hadley 1976, fig. 14, p. 19)**

States such as the Fort Union region in North Dakota. Most of the overburden in this area, as well as in other areas of the Western United States, appears to be saline and sodic shales and claystones which create severe problems in rehabilitation. Scoria, sandstone, and gravel, while more desirable for rehabilitation, are also more scarce. Some of the shales and claystones might be less saline, and if so, more easily rehabilitated. An inventory of these more preferred substrata is certainly desirable and warranted (Thorne Ecological Institute 1975).

In some surface mine areas of the Western United States these types of inventories are presently under way by State and Federal agencies. One particular area that has received considerable attention is west central North Dakota (Moran and others 1978). Another such area is the Gillette area in Wyoming. The U.S. Geological Survey is gathering data on the topography, landforms, geology, coal reserves, geochemistry, surface water, erosion and sediment yield, and groundwater to ascertain the potential effects of surface mining of coal (Keefer and Hadley 1976).

One inevitable effect of surface mining is the alteration of the surface topography as a re-

sult of surface mining operations. This alteration depends on factors such as depth and thickness of the coal being mined and the manner in which the overburden is being replaced in the mined-out pits. A cross-section showing the potential changes in topography in the Gillette area as a result of surface mining of coal is given in fig. 13. Knowledge of the postmine landscape is especially important in areas where the stripable coal is thick in comparison to the overburden material. Such reconstructions are essential to determining the potential distribution of surface drainage and predicting changes in erosion and sediment yield patterns. Because of the thickness of the coal in this area, the ground surface will be lowered considerably (fig. 13). As a result, extensive closed depressions may be created and gullying along stream course upstream from high walls and increased erosion and sediment yield may result if proper reclamation procedures are not followed.

Potential environmental problems such as those found in the North Dakota and Gillette areas can only be recognized if a sufficient data base from overburden and hydrology studies exists. Solution to some potential environmental



problems must be based on a regional as well as a site-by-site basis.

## Soil and Overburden

### FIELD INVENTORY DATA APPLICATION

The field inventory maps and accompanying descriptive information will be directed toward answering the following basic question: How much soil material is available that is suitable as plant growth media and what is the distribution of these materials on the site?

The field inventory data base should include the following information for answering the above question:

1. Adequate soil profile descriptions so that topsoil and subsoil isopach maps can be developed to calculate the amount of material.

2. Soil map at a scale sufficient to portray the extent and distribution of the different kinds of soils which occur.

3. Adequate soil mapping unit description to determine the relative homogeneity of soils within a mapping unit and to provide adequate information for making land capability interpretations.

4. Interpretive classifications should be made for each soil mapping unit with regard to land capability classification, important and unique farmlands, range-site classification, erosion susceptibility, and other soil and/or land classification interpretations that might be useful in developing a reclamation plan.

Most of the interpretive classifications can be developed very easily if the field data are collected using the procedures outlined in this report and the interpretation guidelines, which are available from agencies such as the Soil Conservation Service, USDA; Bureau of Reclamation, USDI; Forest Service, USDA; and Bureau of Land Management, U.S. Department of the Interior.

### LABORATORY DATA APPLICATION

The major problem facing land planners, relative to use of laboratory data, is identifying data needs and interpreting the data once obtained. The diversity of management goals, controlling specifications, variability in physical and plant system environments, and lack of interpretive correlation data makes this task somewhat difficult. Further, the complexity of these interrelated factors renders impractical any attempt to develop or apply uniform criteria. In addition, definable and applicable criteria are more reliable for dealing with some factors as compared to others.

This section is an attempt to present the "state of the art" in interpreting and applying laboratory data in mined-land reclamation and to provide a basis for knowing what to look for in differentiating what is important and what is not in relation to individual projects.

This section is written to present information that can be useful for evaluating and applying laboratory data to the following concerns: (1) soil fertility relationships, (2) soil salinity and/or sodium relationships, (3) soil textural relationships, (4) mineralogical relationships, (5) trace element deficiency and toxicity relationships, (6) soil erosion relationships, and (7) developing a soil and geologic overburden laboratory characterization program.

Use has been made in this section of many sources of unpublished as well as published information.

### Soil Fertility Relationships

The uptake of nutrients by plants is one obvious criterion for assessing their availability. No two species of plants growing on the same soil, however, take up the same quantity of the various nutrients. These variations in uptake are the result of such things as pH of the soil, moisture status, overall fertility status, nature of the plant, and content in the soil of the nutrients.

The above interrelationships have been resolved (at least to a satisfactory degree) for many soil-plant systems through soil test corre-

lation research programs. Most of these investigations have, however, been carried out for agronomic crops under soil moisture regimes quite different from those in which surface mining is taking place in the Western United States. Although agronomic and/or introduced forage crops will be used in some areas in reclamation for which some existing soil test correlation data will be applicable, native vegetation, as well as drier soil moisture regimes, will be the more common soil-plant system for which fertility assessments are made.

Thus, the "state of the art" for evaluating potential soil fertility needs associated with most reclamation efforts is based primarily on judgment.

Data shown in table 15 identifies the soil test-fertilizer recommendation criteria currently being used by the Colorado State University Soil Testing Laboratory. The fertility interpretations provided are thought to be those which most closely approach mined-land reclamation interpretive needs. It must be remembered, however, that these relationships are based on correlation data for a given soil chemical extraction method and for specific crops. (Soil test methods are indicated in table 15.) The purpose for providing this information is not to suggest that the fertilizer treatments recommended be universally applied. This would be undesirable because the recommendations do not have regional application because of crop, climatic, and soil differences. Rather, the information is provided to serve as a first approximation in attempting to identify and/or isolate potential fertility problems associated with a mined-land reclamation effort, recognizing that what might be considered a low soil P level for one type of plant may not be low for another type of plant and/or soil moisture regime.

N and P are recognized as being the most potentially limiting plant nutrients in soils of reclaimed areas in the arid and semiarid West. The degree of deficiency, however, varies greatly due to soil properties, plant type, prevailing climatic conditions, etc.

Although there are little data available, the following is a summary of the present "state of the art" for evaluating the status of several other

nutrients in addition to those listed in table 15 and/or discussed in the section which follows:

*Sulfur.* — Deficiency very unlikely to occur but usually is potentially limiting in very coarse, well-drained, low organic matter soils.

*Calcium.* — Generally present in sufficient quantities; however, may be important from the standpoint of plant nutrition because of the ratio of Ca to Mg. When Mg exceeds Ca on an equivalent basis, plant yields may be influenced. High Mg to Ca ratios have been found for a number of geologic overburden materials. Specific criteria for evaluating this relationship are not well developed.

*Boron.* — Deficiency, if it occurs, is probably restricted to isolated situations. Toxicities are likely to be more common than deficiencies.

*Molybdenum.* — Because of the alkaline nature of most soils found in arid and semi-arid regions, deficiency of this element is unlikely to occur.

In summary, research is being carried out in various parts of the Western United States by State, Federal, and private groups in an attempt to develop interpretive data for evaluating nutrient deficiencies. Thus, soil fertility evaluations can best be made through contact with persons having ongoing research programs.

## Soil Salinity and Sodium Relationships

Excessive salinity and exchangeable sodium in soil and geologic overburden are found to be problems hindering revegetation of strip-mines in many areas in the arid and semiarid western regions. General guidelines for evaluating suitability of topsoil (A horizon), subsoil (B and C horizons) and geologic overburden for revegetation of regraded mined lands under nonirrigated conditions are given in table 16. Since irrigation water and soil amendments can ameliorate salt and sodium conditions and present a large array of interpretive problems, the guidelines are limited to nonirrigated conditions except where salt and sodium reach "undesirable" levels. Similarly, plants have a wide range in salt tolerance characteristics which cannot even begin to be covered

Table 15. — Fertilizer recommendations

Nitrogen		Phosphorus		Potassium		Remarks
Soil organic matter — %		Small grains		Postassium (K)		
(1) NO <sub>3</sub> -N soil test p/m	0-1.0 1.1-2.0 >2.0	Fertilizer N lb/acre	Phosphorus (P) soil test p/m	Fertilizer phosphorus lb/acre P <sub>2</sub> O <sub>5</sub>	(3) Postassium (K) soil test p/m	Fertilizer potassium lb/acre K <sub>2</sub> O
0-6	40	30	0-7 low	40	0-60 low	30
7-12	30	10*	8-14 medium	20	>60 high	0
13-18	10*	0	14 high	0		
19-24	0	0				
>24						
<p>10 lb N is recommended only when phosphorus and/or potassium is also required.</p>						
<p><b>Native and improved range grasses</b></p>						
Soil organic matter — %		Phosphorus (P)		Postassium (K)		Fertilizer potassium lb/acre K <sub>2</sub> O
0-1.0 1.1-2.0 >2.0		soil test p/m		soil test p/m		
(1) NO <sub>3</sub> -N soil test p/m	40 20 12	20 0 0	0-7 low >7 high	30 0	0-60 low >60 high	30 0
<p>(1) Phenoldisulfonic acid method                  (2) Sodium Bicarbonate Extractable P levels                  (3) Ammonium Acetate Extractable</p>						
<p>The above soil test values can be interpreted only for soils tested by the respective methods listed.</p>						

Experience and test results to date indicate that N and P are the elements most likely to be deficient in soils on mined land reclaimed areas. However, responses to fertilizers which are applied to correct these deficiencies are not always obtained because other factors such as soil moisture may be more limiting than these nutrients. The likelihood of a response to added K even at low K soil test values is probably minimal except possibly on very sandy soils.

The authors of this manual know of no available data which can be used to evaluate other nutrient deficiencies.

Below are listed critical levels at which Fe, Mn, Cu, and Zn are considered to be potentially deficient for those agronomic crops which are sensitive to deficiency of these elements and in many cases for those crops grown under irrigated conditions. They cannot and should not be interpreted as being critical for most of the plants grown on most soils/spoils and soil moisture regimes in the Western United States. However, if the levels fall much below those identified below, further evaluation may be necessary.

Element	DTPA extractable p/m (critical level)
Zn	<0.25
Fe	<2.5
Mn	<1.0
Cu	<0.2

Table 16. — Suitability of topsoil, subsoil, and overburden for revegetation of regraded surface mines under non-irrigated conditions in arid and semiarid regions

Factor	Material	Highly suitable (excellent to good)	Suitable (fair)	Undesirable except with amelioration (poor)	Amelioration
$EC_{se} \times 10^3$ mmhos/cm	Topsoil (A-horizon)	<2	2-4 <sup>1</sup>	>4 <sup>1</sup>	Leaching to reduce to <4
ESP	Topsoil (A-horizon)	<5	5-10	>10	Amendment to reduce <sup>2</sup> ESP to <10
$EC_{se} \times 10^3$ mmhos/cm	Subsoil (B & C horizons) <sup>3</sup>	<4	4-8	8	Leaching to reduce to <8
ESP	Subsoil (B & C horizons)	<10	10-15	15-30 <sup>4</sup>	Amendment to reduce <sup>2</sup> ESP to <15
ESP	Subsoil (B & C horizons) 2:1 swelling clay content >65% of <2 $\mu$ fraction	<5	5-10	10-15	Amendment to reduce <sup>2</sup> ESP to <10
$EC_{se} \times 10^3$ mmhos/cm	Overburden (B & C horizon contact material)	<4	4-8	>8 <sup>1</sup>	Leaching
ESP	Overburden (B & C horizon contact material)	<10	10-15	15-30 <sup>4</sup>	Amendment to reduce <sup>2</sup> ESP to <15
$EC_{se} \times 10^3$ and ESP	Overburden as a substitute for topsoil or subsoil (B & C horizon)	Same EC & ESP criteria as topsoil and subsoil			

<sup>1</sup>Changes to suitable with supplementary irrigation water having  $EC \times 10^6 < 1000 \mu$  mhos/cm and SAR <5 or annual precipitation >18 inches.

<sup>2</sup>Amendment alternatives: native gypsum, commercial gypsum, commercial low-B CaCl<sub>2</sub>.

<sup>3</sup>Minimum thickness of overlying A not <6 inches (15 cm).

<sup>4</sup>2:1 swelling clay content 65% of <2 $\mu$  fraction — reduce to topsoil value if > 65%.

adequately within the purpose and intent of these guidelines. The guidelines for salinity were approached on the basis of difficulty in obtaining plant stands on saline soils under nonirrigated conditions. Most plant seeds will germinate under quite saline soil conditions but a great many will fail to emerge and, if emergence takes place, many die during the seedling stage, especially if drought conditions exist simultaneously.

The excellent to good suitability rating for soil salinity and sodium are those levels that should result in little or no difficulty in establishing stands of plants usually used for revegetation and would qualify for "prime-land" category, with respect to salinity and sodium. Also, little or no decrease in plant production after stand establishment would be expected as a result of soil salinity or exchangeable sodium. Lower levels of salt and sodium are recommended for A horizon topsoil placed on the surface. Higher salt levels can be tolerated in the lower depth because plants usually increase in salt tolerance after establishment. Lower exchangeable sodium levels are recommended for A horizon topsoil or topsoil substitute because the soil surface is critical for maintenance of good water-soil-plant relationships. It is necessary to maintain an acceptable infiltration rate to prevent excessive runoff and erosion especially on steep slopes, a 10 percent Exchangeable Sodium Percentage (ESP) probably will not be significant in reducing infiltration rates especially on sandy-textured soils. Some downward movement of exchangeable sodium can be expected, however, even in arid areas. Downward movement of exchangeable sodium can affect the permeability of subsoil layers. Also, translocation of clay can be initiated at relatively low Exchangeable Sodium Percentage (ESP) levels with rainwater. Translocation of clay would reduce the moisture retention of the surface soil and reduce the permeability of lower depths. Loss of clay from the surface layer could result in an increased wind-erosion susceptibility. Thus, the long-term effects of ESP may be more important than immediate effects.

The "fair" suitability rating for salinity levels is in the range where difficulties in establishing a stand under nonirrigated conditions and reduced plant production might be expected, especially if agronomic species were grown. The

"fair" rating for exchangeable sodium would be in the range where some adverse effects on physical properties might be expected, especially on finer-texture materials. Expected adverse effects might be reduced infiltration and permeability, reduced aggregation, and increased water or wind erosion. Migration of salt or sodium, either upward by capillarity or downward by leaching, is possible also.

The "undesirable" rating does not necessarily mean that the soil or overburden could not be used. It may be that the material represents the "best available" in some cases. It does mean, however, that it would probably be necessary to develop water for irrigation and to use amelioration procedures to decrease salt and/or exchangeable sodium to levels that would insure successful revegetation. An arbitrary upper limit of 30 percent exchangeable sodium was imposed for economic considerations; the application of amendments and leaching to dissolve the amendments is a costly and time-consuming process. For example, about 1.7 tons of gypsum (100 percent purity) per acre are necessary to reduce exchangeable sodium by 1 meq/100 g in a 1-ft depth of soil. On the average, it will require that about a 1 to 1.4 ft depth of water be applied per acre to dissolve the 1.7 tons of gypsum so that calcium can replace sodium. An amendment, such as calcium chloride, is much more soluble but it is also much more expensive than gypsum. The water requirement for leaching of soil salts alone is usually much lower than for dissolving an amendment.

As with other aspects of strip-mine reclamation, considerable site-specific judgment needs to be exercised.

## **Soil and Geological Overburden Textural Relationships**

Texture is an important soil property to evaluate in surface mine reclamation planning. In general, texture should not be examined from the standpoint of sand, silt, and clay distribution, per se, but the evaluation should be based upon several important properties that are closely related to texture. A list of factors affected by or related to texture are given in table 17. A generalized rating for each property is given for

Table 17. — Generalized rating of factors probably needing assessment in surface mine reclamation as affected by texture of soil or overburden

Factors Affected by Texture	1s	ls	lfs	sl	fsl	vfls	l	scl	sicl	cl	sc	sic	c
1. Water Infiltration	rapid	rapid	rapid	mod. rapid	mod. rapid	mod.	mod.	mod. slow	mod. slow	mod. slow	slow	slow	very slow
2. Moisture Retention	very low	very low	very low	low	low	mod.	mod.	mod. high	mod. high	mod. high	high	high	very high
3. Potential for Water Stable Aggregate Formation from Dispersed Material	very low	very low	low	low	low	low	mod.	mod.	low	high	high	mod.	high
4. Sodium Dispersion Susceptibility	very low	very low	low	low	low	mod.	mod.	mod.	high	high	high	very high	very high
5. Tendency for Crust Formation on Soil Surface	very low	very low	very low	low	low	mod.	mod.	mod.	high	high	high	very high	very high
6. Wind Erosion Susceptibility	<sup>2</sup> high	mod. <sup>2</sup> high	mod. high	mod. low	mod. low	mod. high	low	mod. low	low	low	mod. low	low	low
7. Water Erosion Susceptibility	very low	very low	low	low	low	mod.	mod.	mod.	high	high	high	very high	very high
8. Aeration	very good	very good	good	good	good	good	good	good	fair	fair	fair	poor	poor
9. Inherent Fertility	low	low	low	mod.	mod.	mod.	mod.	high	high	high	very high	very high	very high
10. Fertilizer Retention	low	low	low	mod.	mod.	mod.	mod.	high	high	high	very high	very high	very high

<sup>1</sup>s-sand, ls-loamy sand, lfs-loamy fine sand, sl-sandy loam, fsl-fine sandy loam, vfls-very fine sandy loam, l-loam, scl-sandy clay loam, sicl-silty clay loam, cl-clay, sc-sandy clay, sic-silty clay, c-clay.

<sup>2</sup>very fine, fine and medium sands and dune sand.

each textural class. Textures most suitable or amenable to reclamation and revegetation generally fall between the sandy loam to clay loam textures. However, a primary consideration should also be maintenance of the integrity of the soil profile developed under natural conditions, in so far as possible. Thus, criteria for determination of suitability with respect to texture is largely "site-specific" and rigid guidelines cannot easily be made. It is suggested that an attempt be made to rank order properties of different materials that are available according to relative importance for a specific climatic and topographical setting and assign a score to each textural class available as topsoil, subsoil, or overburden to arrive at a total quantitative score for each material available. The material with the highest quantitative score would be considered as most suitable at that specific site. Properties to evaluate include infiltration, permeability, structures, water holding capacity, stoniness, salt and exchangeable sodium, surface crusting susceptibility, wind and water erosion susceptibility, fertility, and possibly others. Salt and exchangeable sodium ratings and erosion equations are discussed in another section. The amount of different materials available for regrading or soil reconstruction is also an important factor to be considered. Qualitative suitability ratings of several factors were used by McKall and Associates (1978) to obtain an overall rating of soil suitability for stripmine rehabilitation.

The "slaking test" (table 14) is used to evaluate consolidated overburden as a potential soil substitute material. If 65 percent or more of the consolidated core sample passes through a 5-mm sieve opening after being wet under vacuum and then shaken for 15 minutes in a horizontal shaker, it can be considered that the strata will weather rapidly and be suitable as plant growth media. The infiltration and/or permeability of soil and overburden materials after disturbance are difficult to predict except on a general basis of texture or to measure after regrading. It is expected that infiltration and permeability of soil materials will be higher than measured values in the field after regrading but will gradually decrease until they approach the value obtained before disturbance. Laboratory measurements of "hydraulic conductivity" (table 14) probably represent the best approach for screening differ-

ent textured overburden materials. The "shrink-swell" test (table 14) should provide additional information for evaluating expected permeability changes under saturated conditions.

The following general rules can be applied in relation to other texturally related properties. Field capacity gravimetric moisture content can be closely estimated as: 1/2 paste saturation, percent. Volumetric field capacity can be estimated as: gravimetric moisture, percent times bulk density. Wilting point can be estimated as: 1/4 paste saturation, percent. The difference between field capacity moisture content and wilting point can be used as an estimate of "plant available water".

Better plant stands, more vigorous growth, and higher production of plant material are normally obtained on A horizon topsoil if it is not mixed with subsoil layers or overburden. Germination and emergence of seedlings are usually better on a coarse-textured A horizon than on a structureless fine-textured A horizon, unless moisture is very limiting. Fine-textured materials have a greater tendency to form surface crusts, which decrease the emergence of seedlings.

In general, a fine-textured A horizon should be stripped and stockpiled separately from finer-textured textural B and/or C horizons even though the A horizon is relatively thin. Mixing a textural B horizon (B<sub>2t</sub>) with a fine-textured A horizon, for example a clay loam, is apt to markedly decrease water infiltration and increase erosion. Mixing a textural B horizon with a greater or equal amount of sandy A horizon usually will not decrease infiltration to seriously low rates and may be beneficial by increasing moisture retention capacity.



Other considerations with respect to soil profile reconstruction during regrading operations are as follows. In general, a coarser-textured A horizon placed over a finer-textured subsoil is more suitable for promoting surface infiltration and for maximizing moisture storage while reducing surface runoff and erosion. Placing materials with a large textural difference over one another is undesirable, especially fine-textured material over coarse-textured material, because it acts to interrupt downward moisture flow and creates "perched water tables". Compacted zones should be eliminated when placing one material

over another because compaction impedes moisture flow.

Illustrations of regrading operations, seed bed preparation, and various erosion control techniques are shown in publications by Mills and Clar (1976) and USDA Soil Conservation Service (1977).

## Mineralogical Relationships

*Pyrite mineralogy.* — Pyrite ( $\text{FeS}_2$ ), formed in overburden materials under reducing conditions, oxidizes to form sulfuric acid when exposed to atmospheric oxygen or oxygenated waters. The rate of this reaction is increased as the particle size of the pyrite decreases and in the presence of sulfur-oxidizing bacteria (species of *Thiobacillus*). Framboidal pyrite, a fine-grained pyrite occurring in aggregates of individual crystals, usually  $< 2 \mu$  in size, oxidizes rapidly whereas large crystals react slowly. The overall reaction is shown in equation 1 below. When soil and overburden contains alkaline earth carbonates, such as lime, the acidity produced by pyrite is neutralized as shown in equation 2.



Pyrite is detected in overburden materials by the qualitative method of Neckers and Walker (1952). The total acid potential of pyrite-bearing strata is quantitatively determined by analysis for total sulfur (Bardsley and Lancaster 1965) from which gypsum and water soluble sulfates are subtracted. The acid neutralization potential is determined on the basis of the overburden lime content. An "acid-base account" procedure (Smith and others 1976) is used to determine whether sufficient lime is present to neutralize the total potential acidity. Thus, pyrite in overburden materials should not be present in amounts sufficient to produce acid soil and acid drainage water if overburden is used as a soil substitute or is in contact with regraded subsoil. Prevention of acid soil formation is especially important because heavy metals, in general, be-

come more available to plants and heavy metal concentrations increase in ground water as the soil becomes more acidic. Also, if the sulfuric acid produced by pyrite-oxidation is neutralized by lime, this can result in detrimental effects on ground water by raising the salinity content as soluble calcium and sulfate ions. The bicarbonate ion content may be reduced, however. A more thorough discussion of acidity development follows in volume II.

*Clay mineralogy.* — Swelling or expanding (2:1 type) clay minerals in soils and geologic overburden with excessive absorbed sodium undergo dispersion and decrease soil permeability to a greater degree than nonswelling clays. Identification and quantification of the less than  $2 \mu$  clay mineral fraction could be used as an additional criteria for determining critical exchangeable sodium levels. If the soil clay contains more than 65 percent 2:1 lattice swelling clays, lower limits of ESP could be imposed for the particular suitability class. Clay mineral analysis can be helpful in determining the suitability of overburden as a soil substitute. Overburden with a combination of both nonswelling and swelling clays would be preferable for soil profile reconstruction.

It is recommended that clay mineral analyses be run on only a few cores per site. Lateral variation in the clay mineral suite is generally not great within the area of a proposed surface mine. The possibility exists for greater vertical variation within different depositional strata or rock formations.

*Sandstone mineralogy.* — Microscopic examination of thin section samples of sandstone overburden units, although not a common practice, can provide useful data to aid in the correlation of overburden strata and to supplement other physical and chemical data on the friability, resistance to mechanical breakdown, weatherability, and pyrite content of these units. Little work has been completed on the petrographic characteristics of overburden in the western states. Studies of the mineralogical and textural characteristics and weatherability of Eocene (Wasatch) sandstones of the Powder River Basin, Wyoming, are presently under way by the authors of this report. In the Eastern United States, petrographic studies of Pennsylvanian



Age Sandstones by Grube and others (1972) have revealed that some aspects of geologic overburden that are important to mine land reclamation.

Petrographic studies of the Lower Mahoning sandstone, coupled with determination of the total sulfur content of pulverized samples revealed sufficient pyrite free rock material to place in the oxidation zone of spoil heaps to avoid acid pollution. These studies also reveal abundant sandstone at depths below 6 m that contain highly toxic materials that would produce prolonged sources of acid water pollution unless protected from oxidation by deep burial or other means (Grube and others 1972).

Petrographic studies of the material filling the pore spaces between framework grains of sandstones revealed that moderately calcareous sandstones while hard at the time of excavation, will break down relatively rapidly when left near the surface so that circulating waters are able to remove the carbonate cement. Sandstones with argillaceous parting and clay matrix may also be hard at the time of excavation but will disintegrate rapidly near the surface. The argillaceous sandstone are particularly useful where additional sand would be beneficial in the soil (Smith and others 1974).

## Trace Element Toxicity Relationships

Zinc and iron were considered in a general way from the standpoint of deficiency to plants in section a. These same elements, with the exception of iron, as well as other trace elements (some of which are necessary for plant growth and others which are not) are discussed further in this section because of their environmental importance. In addition to some of these elements being important as required plant nutrients, they are also of concern from the standpoint of toxicity to plants, animals and humans.

The trace elements considered in this section do not include all elements having potential impact on the environment. Those included are recognized as perhaps being the most important and/or likely to be a problem. In general, interest in trace elements tends to be based on the following:

1. Those that are toxic to plants and/or animals (boron, selenium, and molybdenum).
2. Those that are toxic to fish (zinc).
3. Those that are toxic to humans and animals (selenium, arsenic, cadmium, and nickel).

This is not to say that other elements may not be of importance. Those listed are of highest interests, however, and, in general, may be the most likely to occur in quantities in available forms to plants and animals to cause problems.

Evaluation of potential trace element problems is complicated by the same sets of factors as those we find associated in soil fertility evaluations. Although plant uptake of these metals is one criterion for assessing their effects, different plants take up different quantities and the availability of these elements to plants and their mobility in environment is controlled by soil pH, drainage, moisture regime, and amount present in the soil. Also, nutrient interactions within the plant and/or animal control whether or not deficiency and/or toxicity may occur. Toxicity levels for plants, animals, and in soils have been reported for some elements, while critical levels for other elements have not yet been established.

Evaluation of trace element and plant nutrient relationships for geologic overburden is further complicated by the fact that if the deeply buried materials, that are relatively unaltered, are brought closer to the surface and subjected to the natural bio-geochemical weathering process, significant changes may occur in their chemical and physical properties through time. These changes may not be identifiable either through "total" or "available" chemical analysis performed on fresh materials.

Geologic material identification through mineralogical analyses can be a useful tool for identifying minerals having weathering reaction products that might be significant to the plant-soil-water environments. If mineralogical analyses are not performed, then other measures are needed to identify potential changes in geologic materials as a result of weathering, i.e., long term leaching effects and plant growth and plant tissue analyses.

It appears that a logical approach to the problem at the present time is (1) to know some-

thing about the kinds of soil or geologic materials in which these elements are likely to occur in high amounts, (2) to make some arbitrary assessment as to the availability of these elements to plants and/or animals based on an interpretation of the soil systems that occur or are likely to occur on the site, and (3) if a problem is suspected, to make an appropriate choice of a chemical extractant which will indicate the potential availability to plants and/or mobility of the element in the bio-geochemical environment.

The data provided in table 18 show, in general, the amounts of some trace elements found in rocks that form soil parent materials. This information enables us to anticipate with some degree of confidence the approximate amount of a trace element that might be present if we identify the nature of the geologic material(s) with which we are working.

In addition, the data in table 18 identifies the soil conditions in which the various trace elements may be potentially more available to plants, and also more mobile in the soil, and thus subject to leaching.

## Soil Erosion Relationships

Some accepted procedures for evaluating wind and water erosion potential, and identifying regraded and stockpiled areas follows:

The methods discussed have certain limitations. It is suggested that the references listed be carefully reviewed to ensure that the methods are not misinterpreted relative to their applicability for assessing erosion for a given condition. The procedures outlined can be an excellent tool for assessing the relative erosion potential that might exist, but must be used with discrimination and with adequate background information relative to the values that are used for assessing the impact of a particular variable.

*Wind erosion.* — Overall susceptibility to wind erosion has been demonstrated to be the result of a number of variables and has been expressed in the form of the equation

$$E = f(I K C L V)$$

where:

E = the predicted average annual soil loss expressed in tons/acre/year.

I = soil erodibility. This is the inherent potential of the soil to erode under a "bare" surface condition.

K = a soil surface roughness factor. Many times, roughening of the soil surface by mechanical means can, on some soils, completely stop wind erosion for at least a short term period. This factor should be seriously considered as a "short term" practice as part of an erosion control plan. Guides are available for calculating surface roughness for specific site situations. This practice would be most useful on soils having "moderate" wind erosion susceptibility because they generally leave a cloddy, as well as roughed surface condition after treatment, both of which are effective in controlling wind erosion.

C = climatic factor. This factor is evaluated based on the average wind velocity and on the precipitation-evaporation index for a given area.

L = The unsheltered distance along the prevailing wind direction. Attempts should be made to avoid creating unsheltered or bare soil areas which are moist subject to prevailing winds. For example, creating a bare area on the windward side of a knoll greatly increases susceptibility to wind erosion and stabilization procedures would have to recognize this situation if it exists. Otherwise, stabilization efforts often will fail.

V = vegetative cover. This variable in wind erosion evaluation considers three conditions: (1) quantity of residue, (2) kind of residue, and (3) the orientation of the residue.

*Water erosion.* — Factors important for evaluating water erosion potential and a basis for developing erosion control management practices have also been combined in the form of the following equation-like expression:

$$A = R K L S C P$$

where:

A = computed soil loss expressed in tons/acre/year.

**Table 18. — General relationships of occurrence and availability of trace elements in soil and/or geologic overburden**

General abundance and occurrence of trace elements in geologic and soil materials in p/m (Bowen 1966; Swain 1955; Taylor 1961) (Total concentration)											
	Mn	B	Zn	Cu	As	Pb	Mo	Se	Cd	Ni	
Earth crust	950	10	70	55	1.8	12.5	1.5	.05	.2	75	
Sedimentary rocks											
Shale	850	100	95	45	13.0	20.0	2.6	.60	.30	68	
Sandstone	50	35	16	5	1.0	7.0	.20	.05	.05	2	
Limestone	1100	20	20	4	1.0	9.0	.4	.08	.35	20	
Soils											
Range	100-4000	2-100	10-300	2-100	1.0-50	2.0-200	.2-5.0	.01-2.00	.01-7.00	—	—
Mean	850	10	50	20	6.0	10.0	1.0	.20	.06	40	

**Concentrations of trace elements in the surface layers of soils in Powder River Basin — in p/m  
(after Keefer and Hadley 1976)**

	Mn	B	Zn	Cu	As	Pb	Mo	Se	Cd	Ni
Depth 0-1 inch (0-2.5 cm)										
Range	70-1000	<2.0-70	28-93	3-30	—	10-30	<3-20	—	—	<5-30
Mean	280	31	62	16	7.2	18	—	.20	—	15
Depth 6-8 inches (15-20 cm)										
Range	100-700	<20-70	25-104	5-50	—	10-100	<3-5	—	—	<7-50
Mean	250	28	64	18	8.2	18	—	.14	—	16

<sup>1</sup> Providing specific criteria for evaluating potential toxicity and/or deficiency of these elements is impractical and even dangerous because of the variability in tolerance to these elements by different plants, even within the same species — animals and humans. The only appropriate manner for handling these questions at the present time is to review recent literature and determine if data that are available actually apply to a particular situation. Suggested references are: Chapman and others 1966; Mitchell 1964; Connor and others 1975; Cannon and others 1972; Shacklette 1972; Hemphill 1973; Prabhakarannair 1969; Connor and others 1976; Cragg 1971; Norman and others 1968.

General soil conditions where elements are mobile or available to plants		
Element	Soil condition	Remarks <sup>1</sup>
Mn	Most available under acid soil conditions; neutral or alkaline soil conditions may cause deficiencies.	Manganese toxicities in plants generally occur on very acid soils. Deficiencies may occur on neutral or alkaline soils. Excess Mn may restrict plant growth.
B	Low precipitation, alkaline soil conditions.	Boron toxicity can occur in arid areas where sodium and calcium borates occur in soils. The safe limits of available Boron content between deficiency and toxicity are narrow.
Zn	Soil low in CaCO <sub>3</sub> ; acid soil conditions.	Zinc toxicities can occur on acid soils that are heavily fertilized with zinc fertilizers. Zinc tends to accumulate at or near the surface of the soil.
Cu	Acid soil conditions.	Deficiency of copper occurs on sandy alkaline soils that have been well leached. Toxicity of copper can occur on soils that have been subject to applications of sprays containing copper.
As	Alkaline soil conditions.	No evidence that arsenic is essential for plant growth. Toxicity generally occurs in areas that have accumulated arsenic in the soils through foliar spray compounds.
Pb	Acid soil conditions.	Lead accumulated in surface horizons of many soils does not appear to be readily available to plants. Lead may be absorbed by plants from pollution and then be toxic to animals.
Mo	Wet soils and neutral to alkaline soil conditions.	Heavy applications of phosphatic fertilizers will increase molybdenum uptake by plants. Excessive amounts of molybdenum are toxic to grazing animals.
Se	Alkaline soil conditions with well oxidized environment.	Selective plants such as Astragalus and Sium generally accumulate selenium and may cause poisoning in grazers. Associated with sedimentary rocks.
Cd	Mildly alkaline to acid soil conditions.	Not usually toxic to plants. Cadmium may be absorbed by plants from pollution and may cause toxicity to grazing animals.
Ni	Acid soil conditions.	Nonessential for plants and animals. The amount of nickel absorbed ranges widely among species.

R = the rainfall factor. An index which is the measure of the erosive force of specific rainfall. This value can be expressed as a mean over an annual period or for short periods of time.

K = the soil erodibility factor. A relative value expressed from 0 to 1.0 which reflects the inherent potential of soil to erode by water when exposed.

LS = slope length and degree factor.

C = crop cover or management factor.

P = erosion control practice factor such as contouring, terracing, etc.

Numerical values for each of the six factors have been determined from field experience and research data. Values for use in the wind erosion equation also are available (USDA Soil Conservation Service 1977 a, b, c).

## **Developing a Soil and Geologic Overburden Laboratory Characterization Program**

The main objective in developing a soil and geologic overburden laboratory characterization program is to avoid mass sample characterization by minimizing the number and/or kinds of analyses that are performed. This is done without sacrificing quality and kinds of data needed for making the assessments necessary.

The Bureau of Reclamation, U.S. Department of the Interior, has for many years based the level and intensity of laboratory characterization on an approach called "screenable soil characterization as related to land reclamation" (personal communication, Mr. Richard Piper, U.S. Bureau of Reclamation, Denver, Colo.). In screenable characterization a multiphase program is developed which minimizes the number and kinds of analyses to be performed. This approach emphasizes that the number and types of laboratory studies to be carried out will be determined by area conditions, particularly variability of soils and land types, and the controlling specifications and needs. Thus, the laboratory characterization must be coordinated from the very beginning with the field investigations. Using this concept, the information in table 19 was developed as an example for determining data needs

for evaluating soil and/or geologic overburden material as plant growth media and effects on environmental quality. The approach, as presented in table 19, may require modification based on present Federal, State, and local regulations, as well as particular site characteristics. It does, however, provide a basic framework for developing a data needs plan.

## **Interpretation and Application of Ground and Surface Water Data**

The interpretation and uses of ground and surface water data relative to surface mining are highly site specific. Here it is possible to provide only general guidelines and procedures. A general description of research and interpretation procedures for ground water and ground water chemistry is provided by Freeze and Cherry (1979).

### **SURFACE AND GROUND WATER QUALITY**

An important purpose of collecting data on the quality of surface and ground waters is to provide a baseline from which changes attributable to mining can be detected. For purposes of premining and postmining planning and decision making, it is necessary to identify and understand, quantitatively, the role that the study site plays in determining the quality of waters used internal and external to the study site. Only then is it possible to rationally project potential changes caused by the mining operations. A number of specific steps must be accomplished.

A first step is to combine the water quality data with the estimated discharges of ground and surface waters to determine chemical discharge from the site to potential receiving waters. The chemical discharge can be computed in terms of specific ions of particular concern, in terms of total dissolved solids, or both. Knowledge of the quality and discharge of the receiving waters below the points of inflow from the study site assist in determining the contribution from the study area. The framework in which

**Table 19. — Example of an approach for determining interpretative data needs**

Situation	Data needs
<b>A. Soil resources</b>	
1. Identify current soil resource status.	a. Federal Register (Jan. 31, 1978) and any State criteria available through the Soil Conservation Service (SCS).
a. Important and prime farmlands.	b. Identify management practices needed to maintain or increase productivity by utilizing existing soil and land interpretive classifications utilized by the SCS, the United States Bureau of Reclamation, and other agencies.
b. Land capability.	
2. Determine plant growth media potential of given soil resource.	a. Soil isopach maps developed from soil inventory are used to determine distributions and extent of soil materials.
	b. Laboratory analyses needed to determine quality of soil resources: salinity, sodium, pH, organic matter, texture, available N, P and K, percent calcium carbonate, and percent saturation (water). Other laboratory analyses for trace elements or heavy metals in the soil should be considered dependent on type of material and in which soil has developed and the chemical status of existing soil systems. Table 18 shows normal levels in rock and soils. This will aid in determining whether or not particular elements may be suspect.
3. Determine current and potential erosion.	Variables for determining wind and water erosion should be identified (USDA Soil Conservation Service 1977a,b,c).
<b>B. Geologic overburden resources</b>	
4. Evaluate geologic overburden for plant growth media. (This step would be carried out if the soil resource evaluation indicates that it is necessary to utilize these materials as plant growth media.)	a. Identify distribution and extent of geologic strata from lithological core data. Sampling according to variances as shown by lithological core characterization.
	b. Laboratory analyses of select geologic overburden to determine quality as a plant growth media: salinity, sodium, pH, organic matter, texture, available N and P, pyrite, percent saturation (water), percent calcium carbonate, percent gypsum, and erosion potential.
5. Evaluate geologic overburden for environmental concerns such as placement effects on ground water quality.	Select geologic overburden to determine effect on environmental quality: salinity, sodium, pH, organic matter, pyrite, percent calcium carbonate, and percent gypsum. Additional analyses for other factors such as heavy metals can initially be determined based on the data shown in table 18.

the analysis is applied is that of a combined expression for water and chemical mass balance (Rowe and McWhorter 1978; Kunkle 1965; Pinder and Jones 1969; Visocky 1970). It is sometimes possible to refine estimates of surface and ground water inflow to the receiving waters by this procedure. For example, suppose the discharge and total dissolved solids (TDS) concentration are measured at both ends of a stream reach receiving ground and surface water inflows from the area of concern. The measured gain of water over the reach must be accountable by surface and ground water inflows, taking into account such factors as diversions, evaporation, and transpiration. Similarly, the measured gain in chemical discharge (TDS multiplied by water discharge) must be accountable by chemical discharge from surface and ground water inflows. Ideally, an overall balance of both water and chemical discharge should be achieved. This is rarely possible without making reasonable adjustments of contributing factors. Often it is advantageous to perform such analyses for selected sub areas and reaches of receiving waters and over selected time intervals, when one or more contributing factors can be set to zero.

Once a satisfactory water and chemical balance has been achieved, the investigator is in a position to predict how the quality and quantity of the receiving waters will be changed by changes in the quality and quantity of inflow from the study area. At this point it is necessary to estimate the changes that can reasonably be expected to occur as the result of mining. Among the factors that must be considered are changes in recharge and storage as a result of mining, interception of surface and ground water by the pit, changes in evapotranspiration, modifications of the routes and quantities of surface runoff, and the pick up of additional contaminants.

Accurately predicting such changes is difficult, and only some very general guidelines can be provided. Discussion of potential changes in the quantities of recharge, ground and surface water runoff, and evapotranspiration are contained in the next subsection. The following is a brief presentation of one method for estimating postmining quality of combined surface and ground water runoff.

The disturbance of the naturally occurring sequence of strata exposes fresh surfaces for contact by water and, therefore, enhances the opportunity for water to pick up additional soluble materials. Experience at one site in Colorado showed that the TDS concentration (as indicated by electrical conductivity) in water that had passed through the spoils was about equal to that in extracts from saturated samples of the spoil (Rowe and McWhorter 1978). Other experience in Montana and North Dakota has not verified the equality of these measurements, however. The present state of knowledge seems to support only the rough rule of thumb that the dissolved solids concentration in spoil water will be on the order of 1 to 3 times the concentration in extracts from saturated pastes prepared from the overburden (Rowe and McWhorter 1978; Van Voase 1978).

In general, the quality (with respect to dissolved solids) of overland flow from disturbed lands is not greatly different from that in the undisturbed state (Rowe and McWhorter 1978). This is particularly true if existing topsoil is replaced on the spoils following mining. Apparently, pick up of dissolved solids by overland flow is not as great as for subsurface flows because the thin layer of material in contact with overland flow is rapidly leached and, because of smaller contact times, among other reasons.

Rowe and McWhorter (1978) present a simple model based upon the concepts of mass balance described in the foregoing paragraphs that may be useful for making rough estimates of the anticipated effect of mining on the TDS in combined surface and ground water runoff. Their model is

$$P_t = \frac{KR f_{sn}P_{sn} + (1-f_{sn})P_{gn} + f_{sm}P_{sm} + (1-f_{sm})P_{gm}}{1 + KR}$$

where:

$P_t$  = the mean TDS in combined surface and groundwater runoff from the total watershed comprised of both mined and natural lands.

$K$  = The ratio of total drainage per unit area (including both surface and ground water

runoff) on the undisturbed portion of the watershed to the total drainage per unit area from the mined land.

$R$  = The ratio of the area of undisturbed land to the area disrupted by mining.

$P_{sm}$  = mean TDS concentration in surface runoff from the mined area.

$P_{gm}$  = mean TDS concentration in ground water runoff from the mined area.

$f_{sm}$  = the fraction of total drainage from mined area that is overland flow.

$P_{sn}$  = mean TDS concentration in surface runoff from the natural area of the watershed.

$P_{gn}$  = mean TDS concentration in ground water runoff from the natural area of the watershed.

$f_{sn}$  = the fraction of total drainage from the natural area that is overland flow.

This model is based on the assumption of zero net change in watershed storage and, therefore, all parameters represent means over a period for which this assumption is approximately true. A minimum of 1 year is recommended.

A brief example follows. Suppose that premine monitoring of the quality and quantity of ground and surface water flows on the watershed to be mined yielded  $P_{sn} = 210$  mg/l,  $P_{gn} = 900$  mg/l, and that  $f_{sn} = 0.10$ . Also, saturation extracts prepared from overburden samples exhibited a mean TDS of 2 300 mg/l, from which it is estimated that the TDS of ground water in the spoils will be 4 600 mg/l. Thus,  $P_{gm} = 4 600$  mg/l. Topsoiling is planned so it is reasonable to assume  $P_{sm} = P_{sn} = 210$  mg/l. Reclamation plans call for revegetation that can be expected to be about equal to the premining vegetation. Grading of the mined lands is not expected to reproduce the premining drainage patterns, however. Numerous small basins with no outlet are formed and this causes reduced surface runoff, longer surface retention of water, and increased infiltration opportunity relative to undisturbed land. Thus, it is anticipated that total

combined surface and ground water runoff from the mined land will be reduced relative to the undisturbed area by 15 percent. This yields  $K = 1/0.85 = 1.18$ . The difference is accounted for by increased transpiration by plants due to the increased quantity of water available in the root zone. Also, because of the lack of good surface drainage on the regraded mined land, it is estimated that the fraction of total drainage from the mined land that is overland flow will be reduced relative to the natural condition. Therefore,  $f_{sm}$  is set equal to 0.05. Finally, the mining plans call for 22 percent of the watershed to be mined. This yields  $R = 0.78/0.22 = 3.55$ .

Values for all of the parameters on the right side of the equation are now available. Substituting and carrying out the computations yields  $P_t = 1 515$  mg/l. This is the anticipated postmining value for the mean annual, discharge weighted, TDS concentration in total drainage from the watershed in which the mine is located. The corresponding premining value is 831 mg/l. In this case, mining 22 percent of the watershed nearly doubles the mean TDS concentration in the watershed drainage.

The foregoing is a demonstration of one way in which water quality and overburden data can be utilized in premine planning and decision making. The model is not applicable in all cases, of course, and other analysis procedures may be required for particular studies.

Water quality data is sometimes very useful for assisting in the understanding of the subsurface hydrologic system. For example, the proportion of surface water and ground water in the discharge of a pumping well can sometimes be determined by knowing the quality of the surface water, the quality of the unmixed ground water, and the quality and discharge of the mixture from the well (Hem 1970). Sudden changes in water quality during a pumping test can sometimes be interpreted as contributions from different zones with dissimilar water quality. Water quality in different zones may provide insight into the degree of interconnection between adjacent aquifer zones, as another example.

## PIEZOMETRIC SURFACE MAPS AND FLUCTUATIONS

Ground water level data from a network of observation wells can be used to construct piezometric surface and water table maps. Such maps are prepared by connecting points of equal water level elevation to form a pattern of contours similar to those on a topographic map. These maps provide information concerning ground water flow direction, quantities of flow (when combined with transmissivity), and likely areas of recharge and discharge. Geologic information on stratigraphy, structure, faults, etc., should be fully utilized during the preparation and interpretation of piezometric surface maps.

An important use of such maps is to compute the quantities of ground water entering and leaving the study area, or possibly, to and from surface water bodies. These quantities are required for use in the water and chemical mass balances discussed in the previous subsection. Premining flow patterns, displayed as a piezometric map, are an aid to the determination of inflow to the mining pit, the estimation of the area over which the piezometric surface can be expected to be disturbed in both the mining and postmining phases, and the postmining flow pattern. The elevation of water levels in wells relative to the elevation of streams, ponds, springs, etc., often provides the most significant information available concerning the interrelationships between surface and ground waters. Similarly, relative elevation of water levels in different aquifers at the same location provides information on the degree of hydraulic interconnection between aquifers, especially when one of the aquifers is being pumped.

Figure 14 is an example of a piezometric surface map prepared for an overburden aquifer at a potential mine site. The direction of ground water flow is toward the northeast in this case. Comparison of piezometric surface elevations in the potential mine area with those in a shallow alluvial aquifer adjacent to the site on the east and north sides indicated that ground water discharged from the potential mine site into the alluvial aquifer. The gradient (slope) of the piezometric surface is about 0.006. These data, together with measured values for transmissivity

of  $7 \times 10^{-3}$  ft<sup>2</sup> per min, and the area through which flow is occurring, yields an estimated 5.4 acre-ft/yr of ground water discharge into the alluvial aquifer. Knowledge of the quality of the ground water in the overburden aquifer and the alluvial aquifer permits the estimation of the influence of the overburden waters on both the quantity and quality of the waters contained in the alluvial aquifer.

Water level fluctuations can sometimes be used to estimate recharge when values for the storage coefficient or apparent specific yield are known. Multiplying the observed change in water level by the storage coefficient or the apparent specific yield gives the volume of water per unit area that has been added or removed from the aquifer. Factors other than recharge and discharge sometimes cause water levels in wells to fluctuate, however. Barometric pressure changes often cause water levels in wells penetrating confined aquifers to change by as much as several centimeters. Water levels should be correlated with barometric pressure and precipitation to help assure a correct interpretation.

Figure 15 shows measured water levels in three wells in a potential mine site. The fluctuations apparent in the lower two graphs correlate well with each other, and these short term fluctuations represent response to atmospheric pressure fluctuations indicating that both wells are completed in a confined aquifer. The upper graph shows the water level in a well penetrating an unconfined aquifer in the same area. The conclusions drawn from these records was substantiated by geophysical and geological data at the site. The time period over which these data were collected is too short to draw any conclusions concerning the indicated trends relative to recharge or discharge. Nevertheless, this example demonstrates how water level fluctuation data can assist in the interpretation of geologic and geophysical information.

## ANALYSIS OF AQUIFER TEST DATA

It is apparent from the discussions in the foregoing subsections that values of transmissivity, storage coefficient, and apparent specific yield are required for several of the computa-



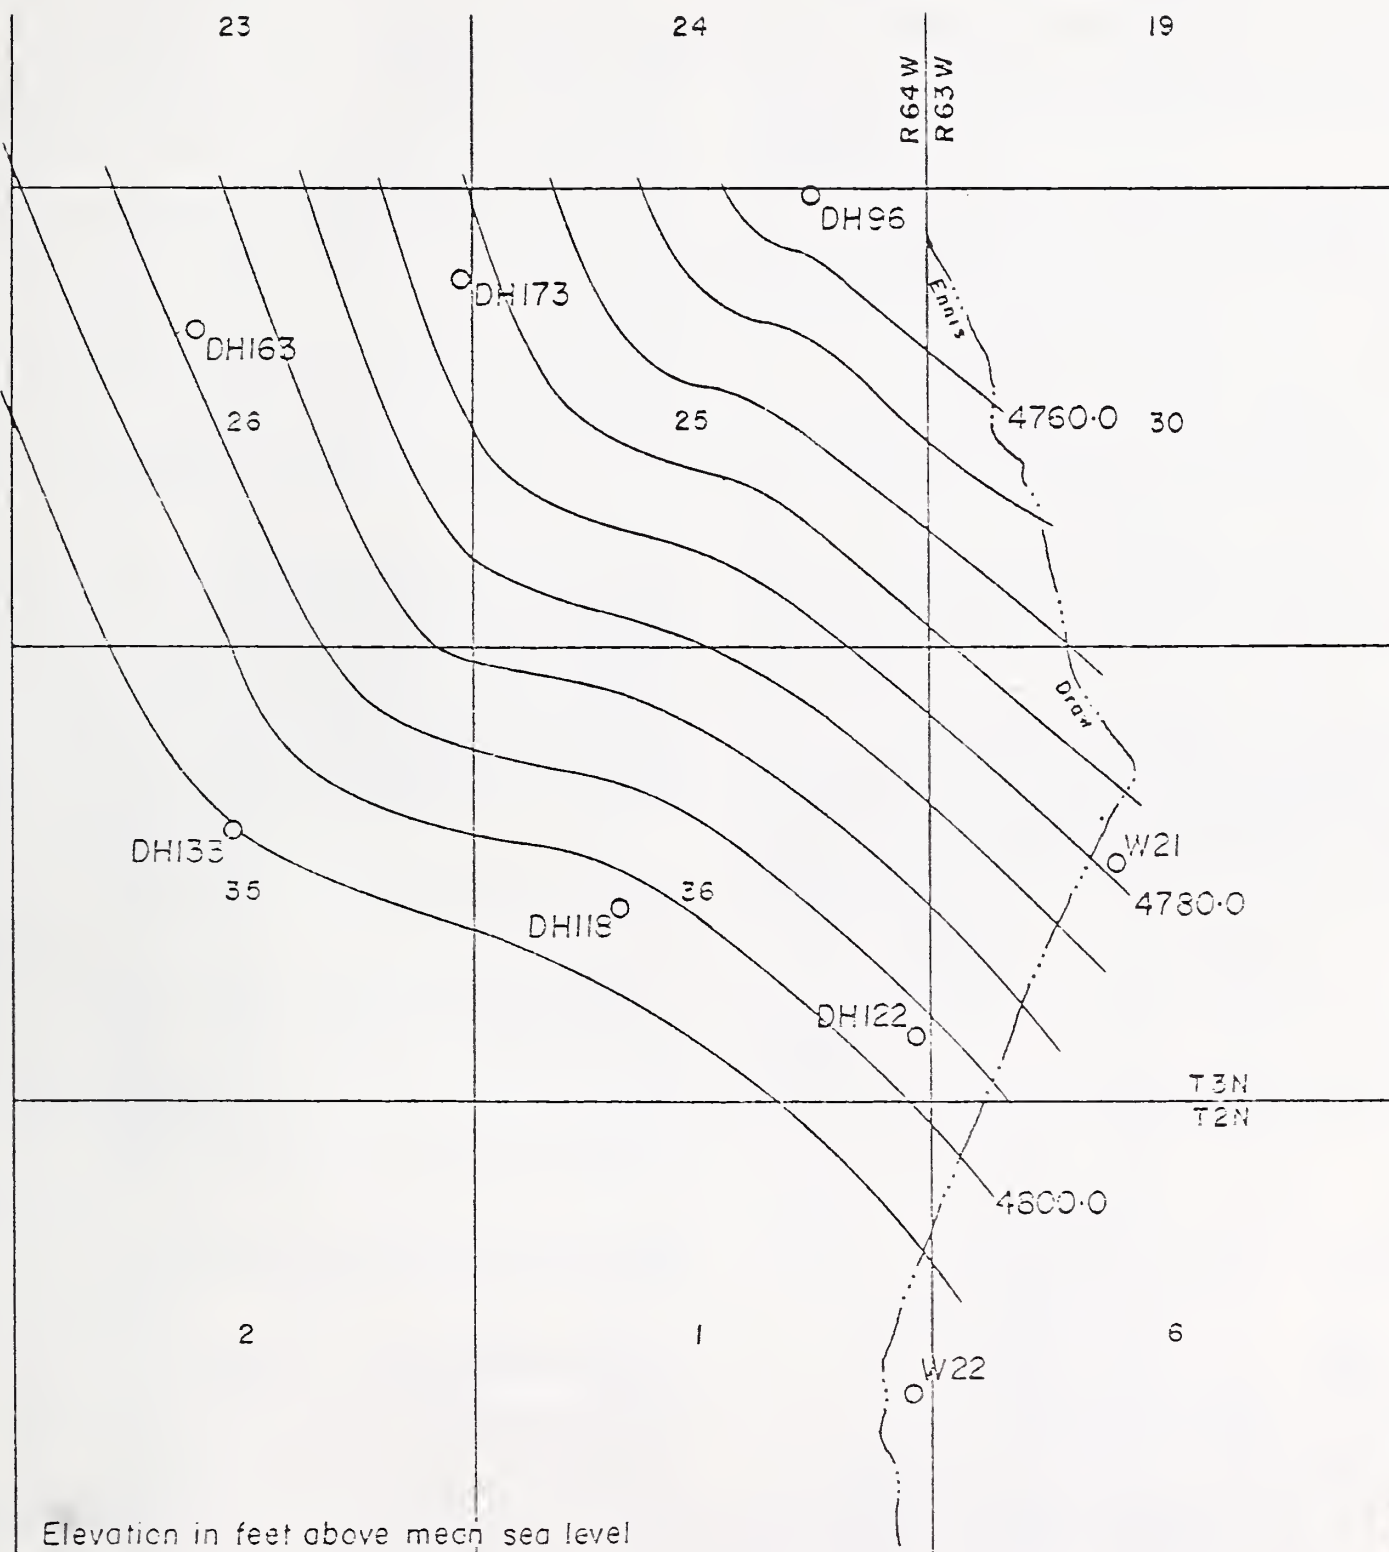


Figure 14. Piezometric surface of overburden aquifer in October 1978.

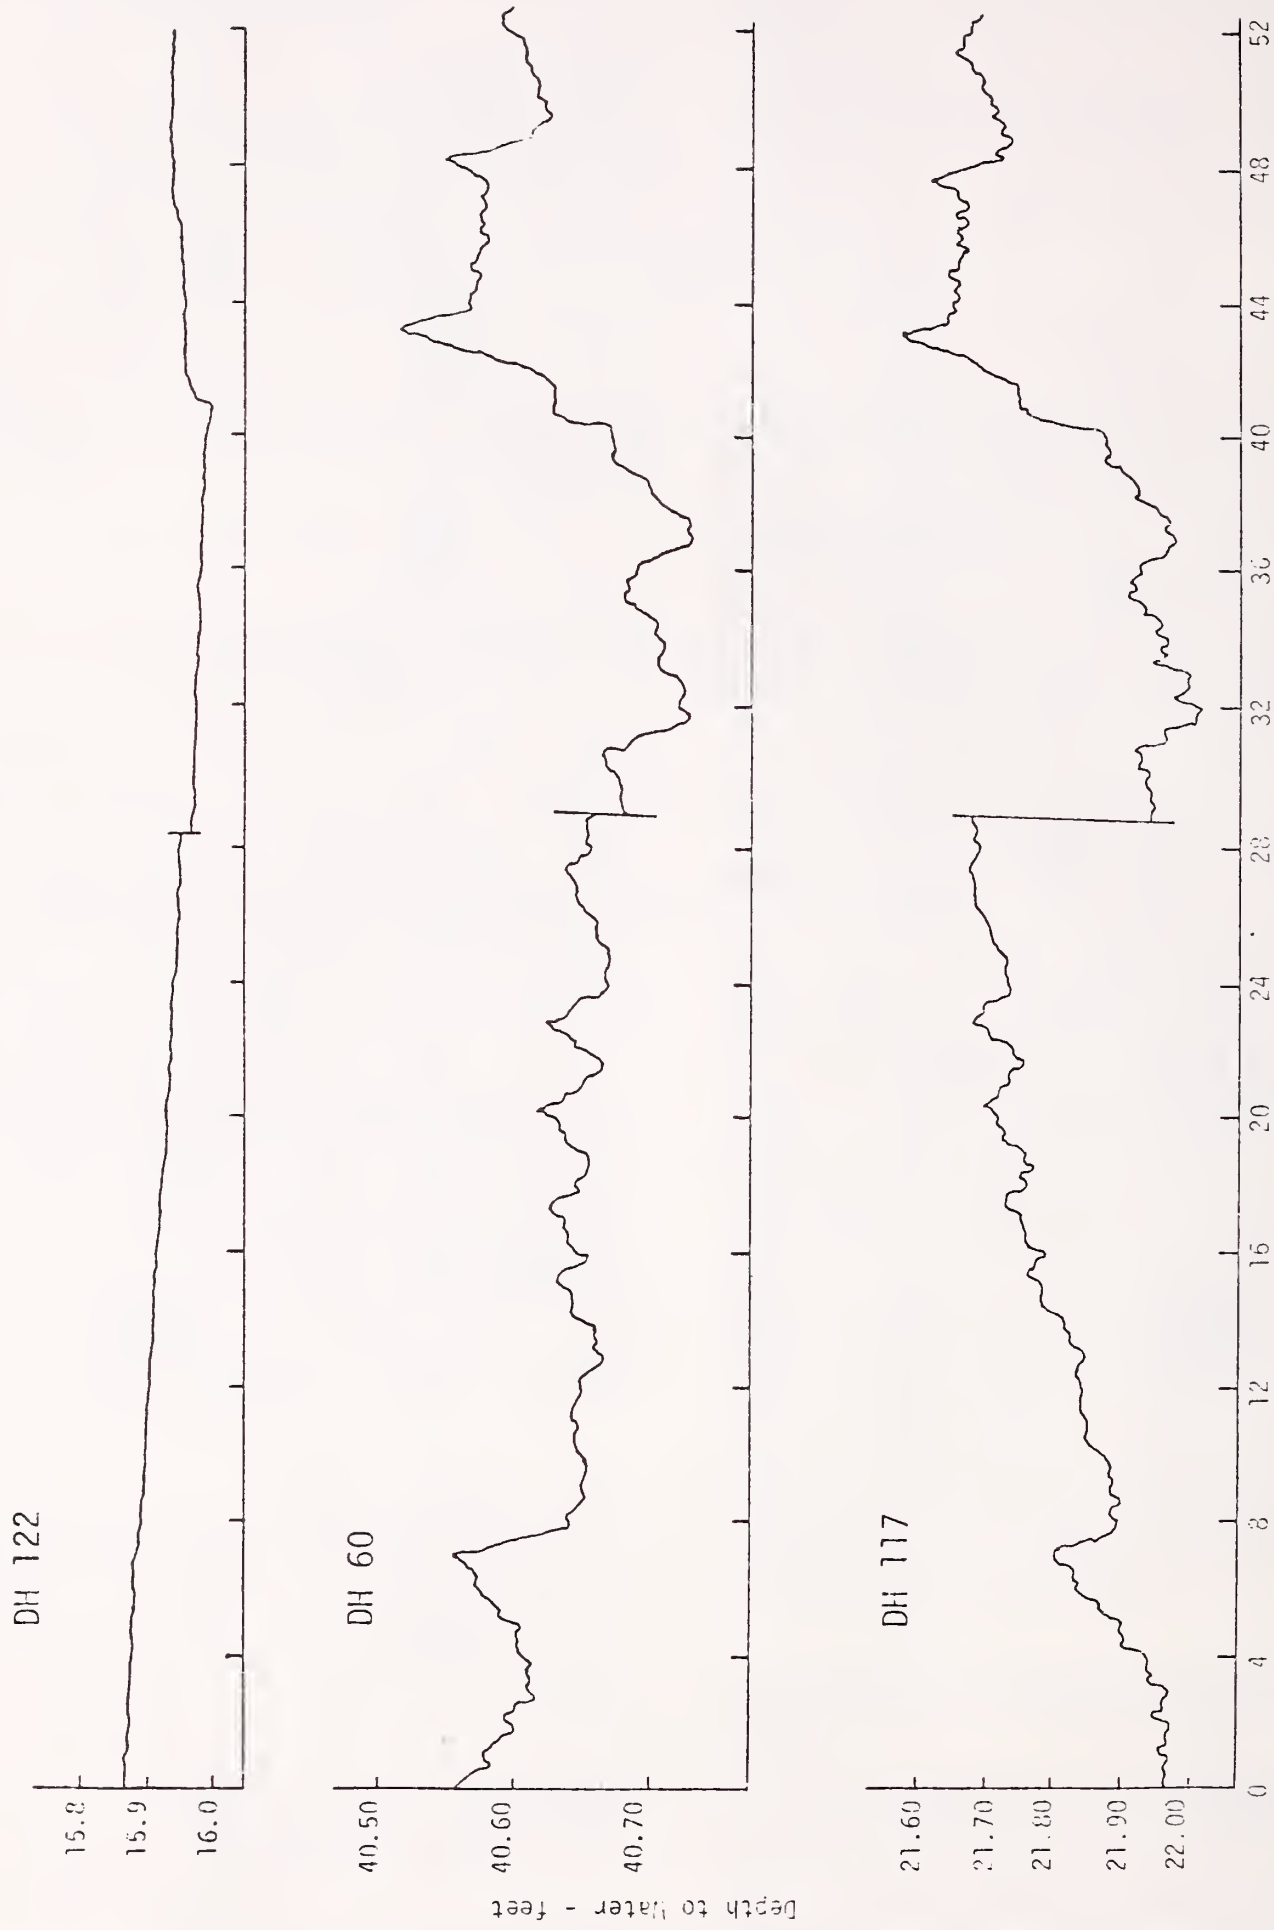


Figure 15. Water table fluctuation recordings.

tions. Other important questions such as mine inflow, the extent of disturbance of the piezometric surface, and recovery time also require knowledge of the hydraulic coefficients. The use of the hydraulic coefficients in such calculations is outlined subsequently. In the present subsection, the analysis of the aquifer test data from which the coefficients are derived is discussed.

Aquifer test data analysis involves the graphical transformation of raw field data into calculated values of the aquifer parameters (Stallman 1971). These aquifer parameters may be obtained from the observation of two relationships that occur during an aquifer test (Johnson, Inc. 1974): (1) The rate of drawdown with respect to time at any point within the cone of depression (time-drawdown graph); and (2) shape and position of the cone of depression with respect to distance at some time during the aquifer test (distance-drawdown graph).

The Theis, Jacob, recovery, and slug test methods are based on observation of the time-drawdown relationship, and the distance-drawdown test method is based on observations of the distance-drawdown relationship. All methods of aquifer test data analysis discussed herein are based on the following assumptions (Stallman 1971; Johnson, Inc. 1972).

1. The aquifer is homogeneous and isotropic.
2. The aquifer is of uniform thickness.
3. The pumping well completely penetrates the aquifer.
4. The natural ground water gradient is negligible.
5. Laminar flow conditions exist throughout the aquifer.
6. The aquifer is of infinite areal extent.
7. The well has been properly developed.
8. The well discharge is equal to the aquifer discharge.

The impact of boundary effects and well development on aquifer test data analysis is discussed later. Certain additional assumptions are invoked for particular types of analyses.

*Theis analysis (adapted from McWhorter and Sunada 1977).* — The Theis method of aquifer test analysis uses the following procedures:

1. On transparent log-log paper, plot drawdown vs  $r^2/t$  ( $r$  is the distance between the pumping and observation wells). This is known as the field curve.

2. From table 20 prepare a log-log plot of  $W(u)$  vs  $u$ . This is known as the type curve. Note: both the field and type curves must be plotted on the same size log-log paper.

3. Superimpose the field curve over the type curve, keeping both axes parallel. Adjust the position of the field curve until a best fit is made between the field data and the type curve.

4. Select any arbitrary "match" point and record its related coordinates  $W(u)$ ,  $u$  from the type curve and  $s$ ,  $r^2/t$  from the field curve (fig. 16).

5. The values of  $W(u)$ ,  $u$ ,  $s$ ,  $r^2/t$  corresponding to the match point are inserted into the following formulas to determine the transmissivity and storage coefficient (or apparent specific yield):


$$T = \frac{QW(u)}{4\pi s} \quad S = \frac{4Ttu}{r^2}$$

where:

- |           |  |
|-----------|--|
| Q         | = well discharge during the pump test            |
| s         | = drawdown                                       |
| S         | = storage coefficient or apparent specific yield |
| T         | = transmissivity                                 |
| r         | = distance between pumping and observation wells |
| $W(u), u$ | = match point coordinates from the type curve.   |

**Table 20. — Values of  $W(u)$  (From McWhorter and Sunada 1977)**

$N/u$	$N \times 10^{-15}$	$N \times 10^{-14}$	$N \times 10^{-13}$	$N \times 10^{-12}$	$N \times 10^{-11}$	$N \times 10^{-10}$	$N \times 10^{-9}$	$N \times 10^{-8}$	$N \times 10^{-7}$	$N \times 10^{-6}$	$N \times 10^{-5}$	$N \times 10^{-4}$	$N \times 10^{-3}$	$N \times 10^{-2}$	$N \times 10^{-1}$	$N$
1.0	33.9616	31.6590	29.3564	27.0538	24.7512	22.4486	20.1460	17.8435	15.5409	13.2383	10.9357	8.6332	6.3315	4.0379	1.8229	0.2194
1.5	33.5561	31.2535	28.9509	26.6483	24.3458	22.0432	19.7406	17.4380	15.1354	12.8328	10.5303	8.2278	5.9266	3.6374	1.4645	0.1000
2.0	33.2684	30.9658	28.6632	26.3607	24.0581	21.7555	19.4529	17.1503	14.8477	12.5451	10.2426	7.9402	5.6394	3.3547	1.2227	0.04890
2.5	33.0453	30.7427	28.4401	26.1375	23.8349	21.5323	19.2298	16.9272	14.6246	12.3220	10.0194	7.7172	5.4167	3.1365	1.0443	0.02491
3.0	32.8629	30.5604	28.2578	25.9552	23.6526	21.3500	19.0474	16.7449	14.4423	12.1397	9.8371	7.5348	5.2349	2.9591	0.9057	0.01305
3.5	32.7088	30.4062	28.1036	25.8010	23.4985	21.1959	18.8933	16.5907	14.2881	11.9855	9.6830	7.3807	5.0813	2.8099	0.7942	0.006970
4.0	32.5753	30.2727	27.9701	25.6675	23.3649	21.0623	18.7598	16.4572	14.1546	11.8520	9.5495	7.2472	4.9482	2.6813	0.7024	0.003779
4.5	32.4575	30.1549	27.8523	25.5497	23.2471	20.9446	18.6420	16.3394	14.0368	11.7342	9.4317	7.1295	4.8310	2.5684	0.6253	0.002073
5.0	32.3521	30.0495	27.7470	25.4444	23.1418	20.8392	18.5366	16.2340	13.9314	11.6280	9.3263	7.0242	4.7261	2.4679	0.5598	0.001148
5.5	32.2568	29.9542	27.6516	25.3491	23.0465	20.7439	18.4413	16.1387	13.8361	11.5330	9.2310	6.9289	4.6313	2.3775	0.5034	0.0006409
6.0	32.1698	29.8672	27.5646	25.2620	22.9595	20.6569	18.3543	16.0517	13.7491	11.4465	9.1440	6.8420	4.5448	2.2953	0.4544	0.0003601
6.5	32.0898	29.7872	27.4846	25.1820	22.8794	20.5768	18.2742	16.9717	13.6691	11.3665	9.0640	6.7620	4.4652	2.2201	0.4115	0.0002034
7.0	32.0156	29.7131	27.4105	25.1079	22.8053	20.5027	18.2001	15.8976	13.5950	11.2924	8.9899	6.6879	4.3916	2.1508	0.3738	0.0001155
7.5	31.9467	29.6441	27.3415	25.0389	22.7363	20.4337	18.1311	15.8280	13.5260	11.2234	8.9209	6.6190	4.3231	2.0867	0.3403	0.0000658
8.0	31.8821	29.5795	27.2769	24.9744	22.6718	20.3692	18.0666	15.7640	13.4614	11.1589	8.8563	6.5545	4.2591	2.0269	0.3106	0.0000376
8.5	31.8215	29.5189	27.2163	24.9137	22.6112	20.3086	18.0060	15.7034	13.4008	11.0982	8.7957	6.4939	4.1990	1.9711	0.2840	0.0000216
9.0	31.7643	29.4618	27.1592	24.8566	22.5540	20.2514	17.9488	15.6462	13.3437	11.0411	8.7386	6.4368	4.1423	1.9187	0.2602	0.0000124
9.5	31.7103	29.4077	27.1051	24.8025	22.4999	20.1973	17.8948	15.5922	13.2896	10.9870	8.6845	6.3828	4.0887	1.8695	0.2387	0.0000071

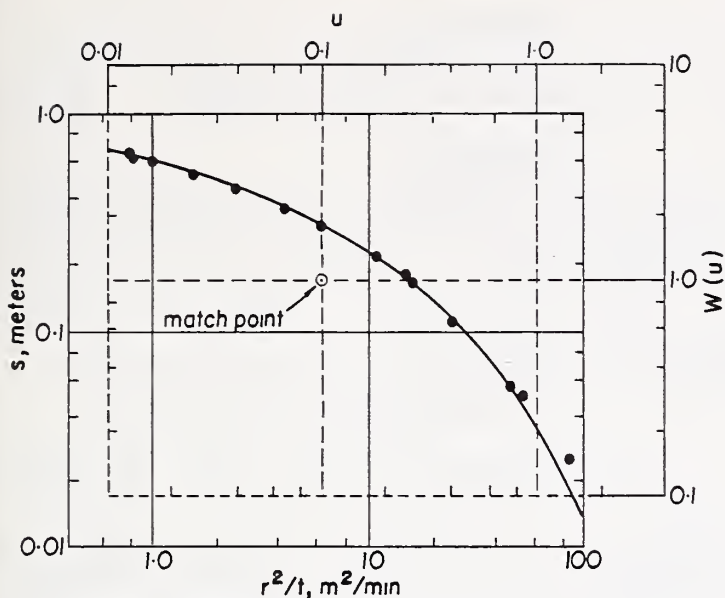

**Figure 16. Matching the type curve with draw-down data.**

Example (McWhorter and Sunada 1977)

Estimate the transmissivity and apparent specific yield of an aquifer from the following data.

$r = 20 \text{ m}$	$Q = 1.872 \text{ m}^3/\text{min}$			
$s(\text{meters})$	0.025	0.050	0.055	0.110
$r^2/t \text{ (m}^2/\text{min)}$	88.9	53.3	47.1	25.0
$s$	0.170	0.180	0.220	0.370
$r^2/t$	16.7	15.1	11.1	6.25
$s$	0.450	0.530	0.620	0.640
$r^2/t$	2.47	1.55	0.98	0.82

Following the procedures described previously, the data are plotted on log-log paper then superimposed on the type curve. Figure 16 illustrates the field curve superimposed on the type curve with a selected match point. The match point coordinates are:

$$W(u) = 1.0, u = 0.1, s = 0.183, r^2/t = 6.2.$$

From before,

$$T = \frac{QW(u)}{4\pi s} = \frac{(1.872)(1.0)}{4\pi(0.183)} = 0.814 \text{ m}^2/\text{min}$$

$$S_{ya} = \frac{4Ttu}{r^2} = \frac{4(0.814)(0.1)}{6.2} = 0.053.$$

In addition to the assumptions listed previously, this method assumes that the aquifer discharge is constant. In applications where the transmissivity is very low, the aquifer discharge to the well may not be constant, even for a constant pump discharge. This is because the pump derives a portion of its discharge from water standing in the well bore. Correction of the pump discharge, using measured drawdowns in the pumped well, may be necessary to determine an acceptably accurate value for  $Q$  in the above equations.

*Jacob analysis* (adapted from McWhorter and Sunada 1977). — The Jacob method is subject to the same restrictions as the Theis analysis. An additional restriction imposed on this method is that the test must be conducted for a sufficiently long time such that  $u < 0.01$ , where  $u = r^2/4at$  and  $a = T/S$  for confined aquifers;  $a = T/S_{ya}$  for unconfined aquifers.

The Jacob method uses the following procedures.

1. Using semi-log paper, plot drawdown on the coordinate axis vs. time on the logarithmic axis (fig. 17). The plot will be a straight line if the test was conducted for a sufficiently long period.
2. From this plot, compute the change in drawdown over one log cycle.
3. The change in drawdown over one log cycle is inserted into the following equation along with the other field data to determine transmissivity.

$$T = 2.303Q/4\pi\Delta s$$

where:

- $Q$  = discharge
- $\Delta s$  = change in drawdown over one log cycle.

4. To determine the storage coefficient or apparent specific yield, extrapolate the straight line portion of the data plot to the horizontal axis ( $s=0$ ). Determine the value of  $t_0$  where the straight line intersects the horizontal axis.

5. Insert the value of  $t_0$  along with the appropriate data into the following formula:

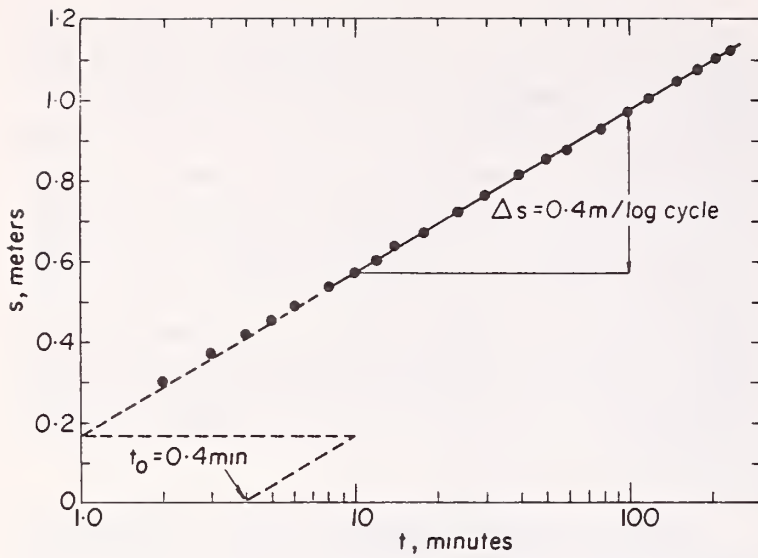


Figure 17. Example of the Jacob method for determining aquifer properties.

$$S = 2.246Tt_0/r^2$$

where:

- r = radial distance between the observation well and the pumping well
- T = transmissivity determined previously
- $t_0$  = time where drawdown = 0
- S = storage coefficient (confined) or apparent specific yield (unconfined).

Example (McWhorter and Sunada 1977)

Given the following data, determine the transmissivity and the storage coefficient.

$$r = 61 \text{ m} \quad Q = 1.844 \text{ m}^3/\text{min}$$

t(min)	1	2	3	4	5
s(meters)	0.200	0.300	0.370	0.415	0.450
t	6	8	10	12	14
s	0.485	0.530	0.570	0.600	0.635
t	24	30	40	50	60
s	0.720	0.760	0.810	0.850	0.875
t	100	120	150	180	210
s	0.965	1.000	1.045	1.070	1.100

The data are plotted as shown in fig. 17. From the foregoing,

$$\begin{aligned} T &= 2.303Q/4\pi\Delta s \\ &= [2.303(1.894)]/[4\pi(0.4)] \\ &= 0.868 \text{ m}^2/\text{min}. \end{aligned}$$

Extrapolation of the straight line yields  $t_0 = 0.4$  minutes at  $s = 0$ .

$$\begin{aligned} S &= 2.246Tt_0/r^2 \\ &= [2(2.246)(0.868)(0.4)]/(61)^2 \\ &= 2.0 \times 10^{-4}. \end{aligned}$$

Before we can accept these results, we must be sure that  $u \leq 0.01$ . For a confined aquifer  $u = Sr^2/4Tt$ . The minimum test duration time for which  $u \leq 0.01$  is given by  $t = r^2S/4Tu = [(61)^2(2.0 \times 10^{-4})]/[4(0.868)(0.01)] = 21$  min. Therefore, only data points for  $t > 21$  min should be used in the determination of the straight line. Using data for which  $u < 0.01$  causes a deviation of about 6 percent from the Theis analysis results.

Because of the restriction that  $u$  must be less than 0.01 for the Jacob method of analysis to be applicable, this procedure is usually used to analyze drawdown data collected on the pumped well itself. Thus, it is often used for the analysis of data from the drawdown/specific capacity type test that was discussed previously. Again, well-bore storage is likely to be a significant source of error in very tight aquifers, unless the pump discharge is appropriately corrected.

*Specific capacity analysis (adapted from Walton 1970; USDI 1977).* — No attempt is made in this method to obtain values for the storage coefficient or apparent specific yield. Rather the procedure is to estimate an appropriate value for the storage coefficient based upon whether the aquifer is confined or unconfined, and from experience in the area (if any). A storage coefficient of  $10^{-4}$  and an apparent specific yield of 0.1 will suffice, if no information is available. Transmissivity  $T$  is plotted against corresponding values for specific capacity  $Q/s$  on log-log paper from the equation

$$Q/s = 4T/[1 \ln \left( \frac{4\pi T}{Sr_w^2} - 0.5772 \right)],$$

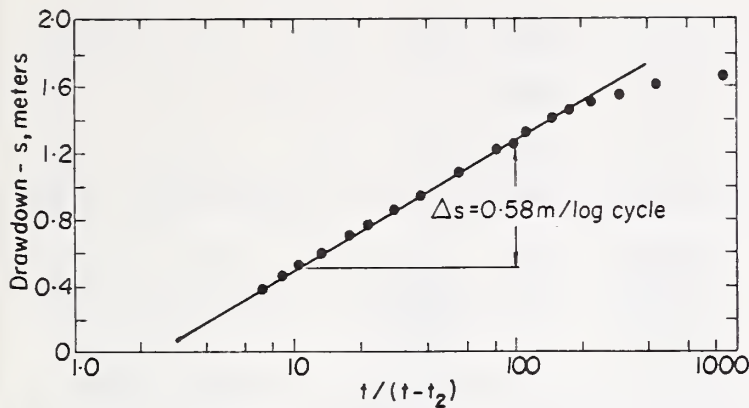


Figure 18. Water levels in a recovery test.

using the estimated value for  $S$  and a number of arbitrary values of  $T$ . The radius of the well is  $r_w$ . The value of time used in the computation is the pumping time at which the drawdown  $s$  was measured. The value of transmissivity that corresponds to the observed specific capacity is read from the graph.

The USDI (1977) reference presents a table from which the transmissivity can be estimated from knowledge of only specific capacity. The value so obtained is only a rough estimate.

*Recovery test analysis (adapted from McWhorter and Sunada 1977).* — The recovery test is conducted immediately after the pump is shut off at the end of the pump test. An additional restriction imposed on this method is that the value of  $u$  must be less than 0.01, where  $u = r^2/4at$  as stated previously.

The recovery test uses the following procedures:

1. Record the total length of pumping time when the pump is shut off ( $t_p$ ).
2. Using semi-log paper, plot drawdown on the coordinate axis vs  $t/t-t_p$  on the logarithmic axis (fig. 18). Note,  $t$  is the time since pumping began,  $t_p$  is the total pumping time ( $t > t_p$ ).
3. From this plot, compute the change in drawdown over one log cycle.
4. Insert the change in drawdown over one log cycle into the following equation to determine transmissivity:

$$T = 2.303Q/4\pi\Delta s$$

5. To determine the storage coefficient or apparent specific yields, extrapolate the straight line portion of the data plot to the horizontal axis. Determine  $t_0$  at the intersection of the straight line and horizontal axis.

6. Insert the value of  $t_0$  into the following formula:

$$S = 2.246Tt_0/r^2$$

where:

- $r$  = distance between observation and pumping wells
- $T$  = transmissivity
- $t_0$  = time when drawdown = 0
- $S$  = apparent specific yield or storage coefficient.

Example (McWhorter and Sunada 1977)

Given the following data determine the transmissivity and the storage coefficient.

$$Q = 1.79 \text{ m}^3/\text{min}, r = 4.6 \text{ m}, \text{ pumping time } t_p = 443 \text{ min.}$$

$s(\text{meters})$	1.640	1.595	1.535	1.490	1.445	
$t(\text{min})$	443.5	444	444.5	445	445.5	
$s$	1.400	1.305	1.235	1.200	1.060	0.930
$t$	446	447	447.5	448.5	451	455
$s$	0.845	0.755	0.700	0.590	0.521	0.451
$t$	459	464	469	479	489	499
$s$	0.384					
$t$	514					

Calculate  $t/t-t_p$  for each of the above data points and plot as shown in fig. 18. From the foregoing,

$$\begin{aligned} T &= 2.303Q/4\pi\Delta s \\ &= [2.303(1.79)2]/[4\pi(0.58)] \\ &= 0.566 \text{ m}^2/\text{min.} \end{aligned}$$

Extrapolation of the straight line yields  $t/t-t_p = 2.2$  min. From before,

$$\begin{aligned} S &= 2.246Tt_0/r^2 \\ &= [2.246(0.566)(2.2)]/(4.6)^2 = 0.13. \end{aligned}$$

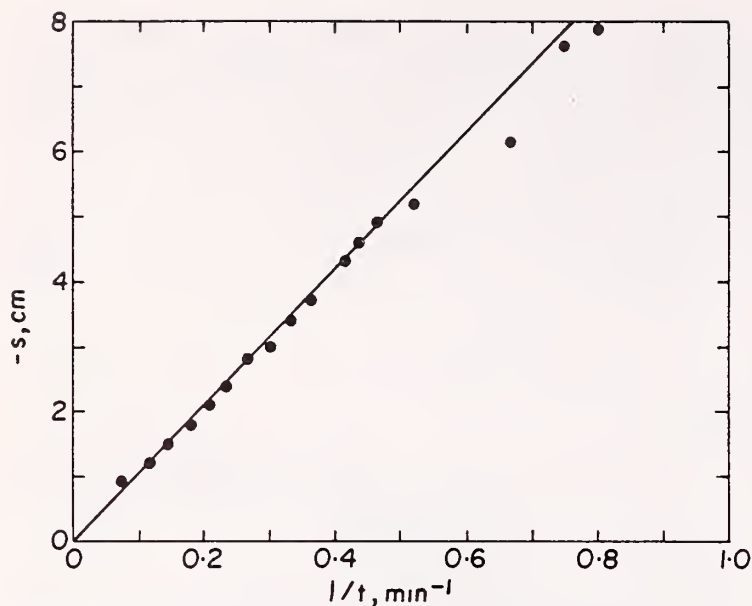


Figure 19. Response to a slug injection.

Again the pump discharge may require correction to determine an appropriate value for  $Q$  in tight aquifers.

*Slug test analysis.* — Three methods of slug test analysis as proposed by Papadopulos and others (1973), Cooper and others (1967), and by Hvorslov (1951), are treated in this section.

The method proposed by Papadopulos and others (1973) is as follows (adapted from McWhorter and Sunada 1977).

1. On rectangular coordinate paper plot the residual buildup of the water level due to a slug injection vs inverse time (fig. 19).

2. Select any arbitrary point on the curve of  $-s$  vs  $l/t$ . The coordinate of the point ( $-s$ ,  $l/t$ ) is inserted into the following equation to determine  $T$ .

$$T = V/4\pi t(-s)$$

where:

$v$  = slug volume

$t$  = time

$s$  = buildup due to the slug injection.

Example (McWhorter and Sunada 1977)

Determine the transmissivity from the following data.

$$V = 0.148 \text{ m}^3$$

$-s(\text{cm})$	7.9	7.6	6.1	5.2	4.9
$l/t(\text{min}^{-1})$	0.800	0.750	0.667	0.521	0.461
$-s$	4.6	4.3	3.7	3.4	3.0
$l/t$	0.435	0.413	0.361	0.333	0.300
$-s$	2.4	2.1	1.8	1.5	1.2
$l/t$	0.231	0.212	0.183	0.146	0.117

These data are plotted on coordinate paper as shown in fig. 19. A point on the line is selected arbitrarily; in this case the coordinates of the point are  $-s = 6.3$  cm,  $l/t = 0.6$ . From the foregoing,

$$\begin{aligned} T &= V/4\pi t(-s) \\ &= 0.148/[4\pi(0.6)(6.3/100)] \\ &= 0.11 \text{ m}^2/\text{min}. \end{aligned}$$

Note this method does not provide a reliable determination of the storage coefficient (Cooper and others 1967) and does not account for changes in well-bore storage.

The method of analysis as proposed by Cooper and others (1967) is as follows.

1. On semi-log paper plot  $H/H_0$  on the arithmetic axis vs time on logarithmic axis (field curve) where

$H_0$  = the buildup of the water level at time  $t=0$  due to a slug injection,  
 $H$  = the residual water table buildup some time  $t$  after injection.

2. From table 21 prepare a semi-log plot of  $H/H_0$  vs  $Tt/r^2$  (type curve), where  $r$  = radius of well casing,  $T$  = transmissivity, and  $t$  = time.

3. Superimpose the field curve on the type curve keeping the horizontal axes coincident. Adjust the position of the field curve so as to achieve the best fit of data to the type curves (see fig. 20).

4. Select an arbitrary "match" point and read the corresponding values of  $t$  (from the field curve) and  $Tt/r^2$  (from the type curve).

5. Insert the corresponding match point values for  $t$  and  $Tt/r^2$  into the following equation and solve for  $T$ .




**Table 21. — Values of  $H/H_0$  for a Well of Finite Diameter (from Cooper and others 1967).**

$Tt/r_c^2$	$H/H_0$				
	$\alpha = 10^{-1}$	$\alpha = 10^{-2}$	$\alpha = 10^{-3}$	$\alpha = 10^{-4}$	$\alpha = 10^{-5}$
$1.00 \times 10^{-3}$	0.9771	0.9920	0.9969	0.9985	0.9992
$2.15 \times 10^{-3}$	0.9658	0.9876	0.9949	0.9974	0.9985
$4.64 \times 10^{-3}$	0.9490	0.9807	0.9914	0.9954	0.9970
$1.00 \times 10^{-2}$	0.9238	0.9693	0.9853	0.9915	0.9942
$2.15 \times 10^{-2}$	0.8860	0.9505	0.9744	0.9841	0.9888
$4.64 \times 10^{-2}$	0.8293	0.9187	0.9545	0.9701	0.9781
$1.00 \times 10^{-1}$	0.7460	0.8655	0.9183	0.9434	0.9572
$2.15 \times 10^{-1}$	0.6289	0.7782	0.8538	0.8935	0.9167
$4.64 \times 10^{-1}$	0.4782	0.6436	0.7436	0.8031	0.8410
$1.00 \times 10^0$	0.3117	0.4598	0.5729	0.6520	0.7080
$2.15 \times 10^0$	0.1665	0.2597	0.3543	0.4364	0.5038
$4.64 \times 10^0$	0.07415	0.1086	0.1554	0.2082	0.2620
$7.00 \times 10^0$	0.04625	0.06204	0.08519	0.1161	0.1521
$1.00 \times 10^1$	0.03065	0.03780	0.04821	0.06355	0.08378
$1.40 \times 10^1$	0.02092	0.02414	0.02844	0.03492	0.04426
$2.15 \times 10^1$	0.01297	0.01414	0.01545	0.01723	0.01999
$3.00 \times 10^1$	0.009070	0.009615	0.01016	0.01083	0.01169
$4.64 \times 10^1$	0.005711	0.005919	0.006111	0.006319	0.006554
$7.00 \times 10^1$	0.003722	0.003809	0.003884	0.003962	0.004046
$1.00 \times 10^2$	0.002577	0.002618	0.002653	0.002688	0.002725
$2.15 \times 10^2$	0.001179	0.001187	0.001194	0.001201	0.001208

**Table 22. — Rise of water level in Dawsonville well after simultaneous withdrawal of weighted float ( $r=7.6$  cm) (from Cooper and others 1967).**

$t$ (sec)	$1/t$	Head (m)	$H$ (m)	$H/H_0$
-1		0.896		
0		0.336	0.560	1.000
3	0.333	0.439	0.457	0.816
6	0.167	0.504	0.392	0.700
9	0.111	0.551	0.345	0.616
12	0.0833	0.588	0.308	0.550
15	0.0667	0.616	0.280	0.500
18	0.0556	0.644	0.252	0.450
21	0.0476	0.672	0.224	0.400
24	0.0417	0.691	0.205	0.366
27	0.0370	0.709	0.187	0.334
30	0.0333	0.728	0.168	0.300
33	0.0303	0.747	0.149	0.266
36	0.0278	0.756	0.140	0.250
39	0.0256	0.765	0.131	0.234
42	0.0238	0.784	0.112	0.200
45	0.0222	0.788	0.108	0.193
48	0.0208	0.803	0.093	0.166
51	0.0196	0.807	0.089	0.159
54	0.0185	0.814	0.082	0.146
57	0.0175	0.821	0.075	0.134
60	0.0167	0.825	0.071	0.127
63	0.0159	0.831	0.065	0.116

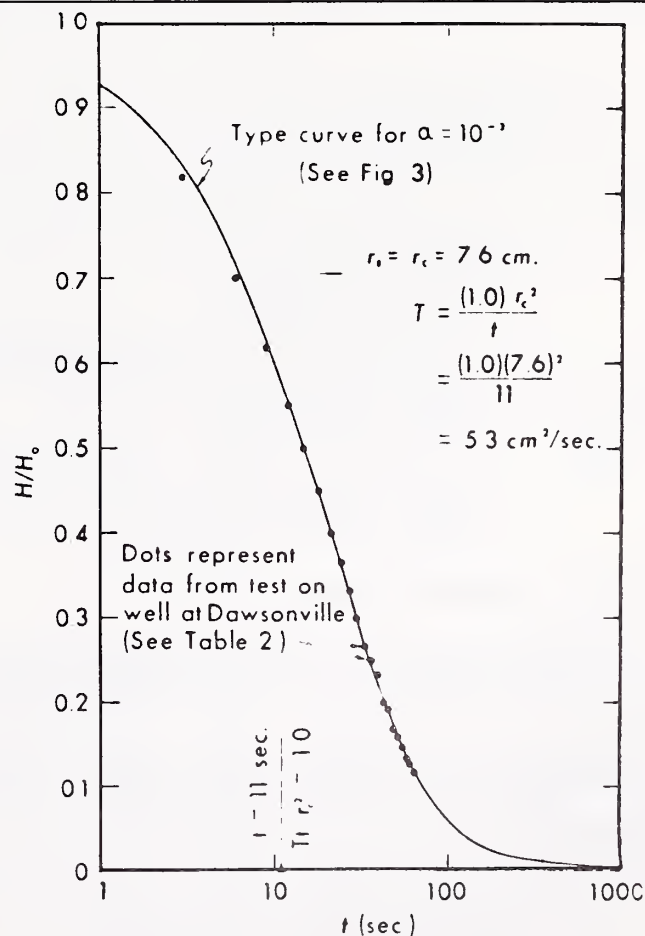

**Figure 20. Plot of data from test at Dawsonville, Georgia, superposed on type curve (from Cooper and others 1967).**

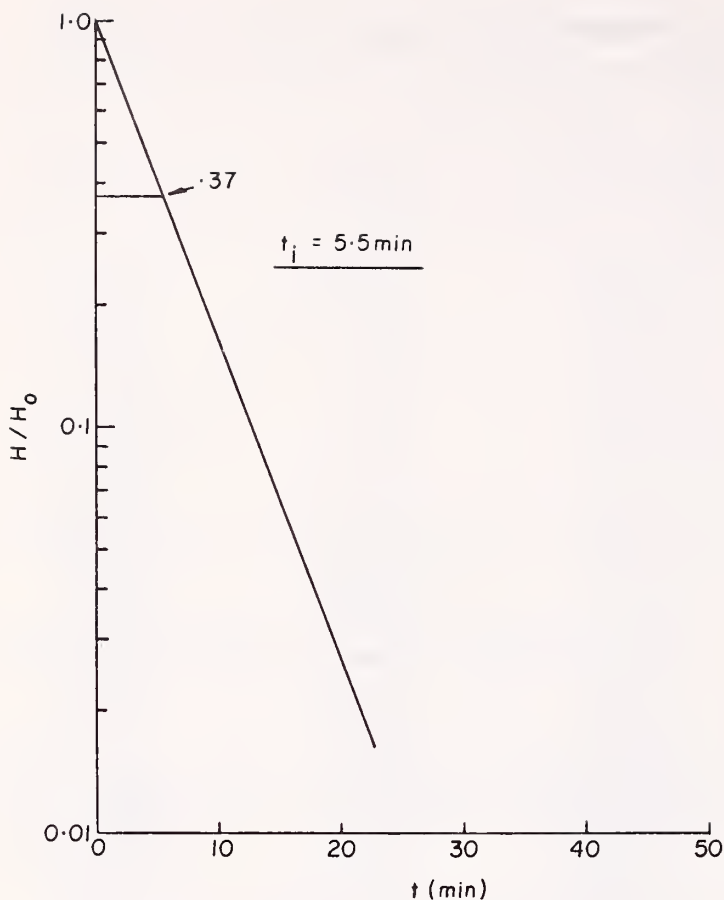


Figure 21. Time lag plot.

$$T = [(Tt/r^2)r^2]/t$$

where:

T = transmissivity

r = well casing radius

t = time coordinate on the field curve of the match point

$Tt/r^2$  = the value of  $Tt/r^2$  on the type curve corresponding to the match point.

Example (Cooper and others 1967)

Given the test data listed in table 22, determine the transmissivity. A plot of  $H/H_0$  vs  $t$  superimposed on the type curve is shown in fig. 20. The coordinates of the match point are determined from fig. 20 to be  $Tt/r^2 = 1.0$ ,  $t = 11$  sec. From the foregoing,

$$T = [(Tt/r^2)r^2]/t = [1(7.6)^2]/11$$

$$= 5.3 \text{ cm}^2/\text{sec} = 5.3 \times 10^{-4} \text{ m}^2/\text{min}.$$

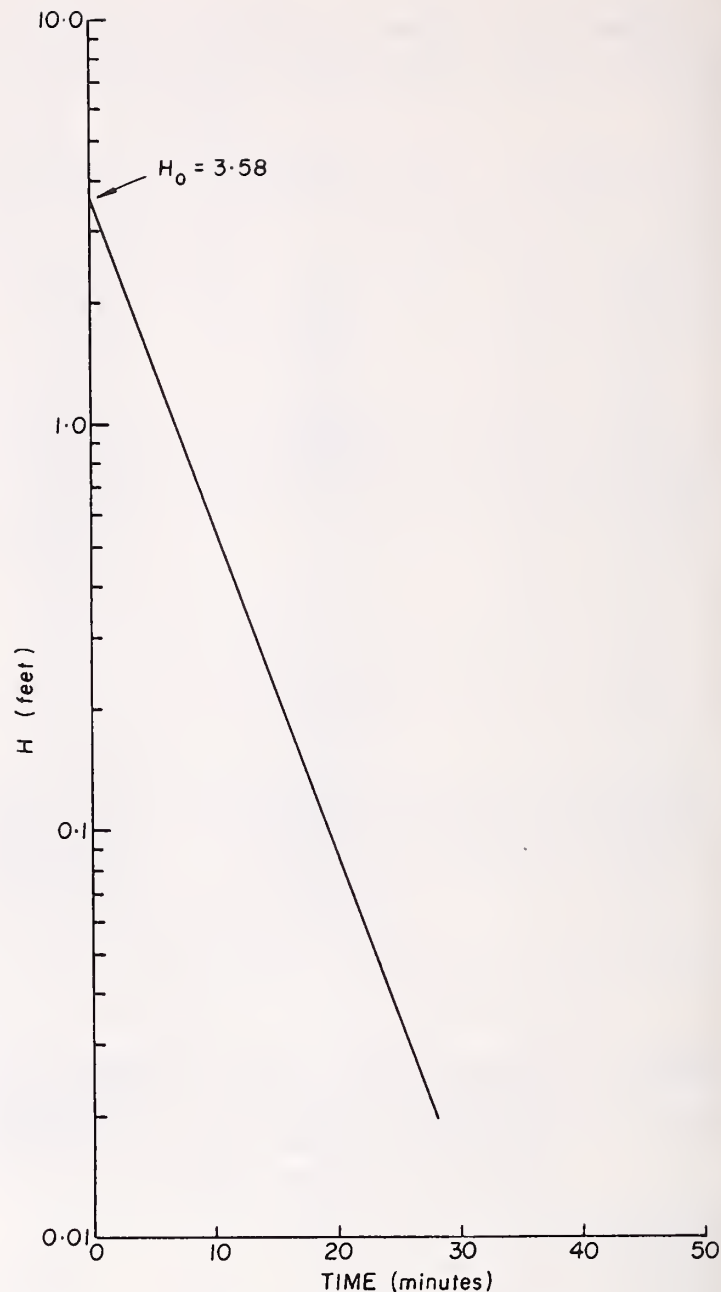


Figure 22. Plot the buildup H vs time.

Note: this method does not provide a reliable determination of the storage coefficient, S (Cooper and others 1967).

Slug test as proposed by Hvorslev (1951) is as follows:

1. On semi-log paper plot  $H/H_0$  on the logarithmic axis vs time on the arithmetic axis as shown in fig. 21.  $H_0$ , the buildup of water level at time zero, is best determined as follows. Plot the buildup H vs time on semi-log paper as illustrated in fig. 22. Extrapolate the straight line position of the plot to time  $t=0$  to determine  $H_0$ , the initial buildup due to a slug injection at time zero. Once  $H_0$  is determined, values of  $H/H_0$  can be calculated and plotted as in fig. 21.

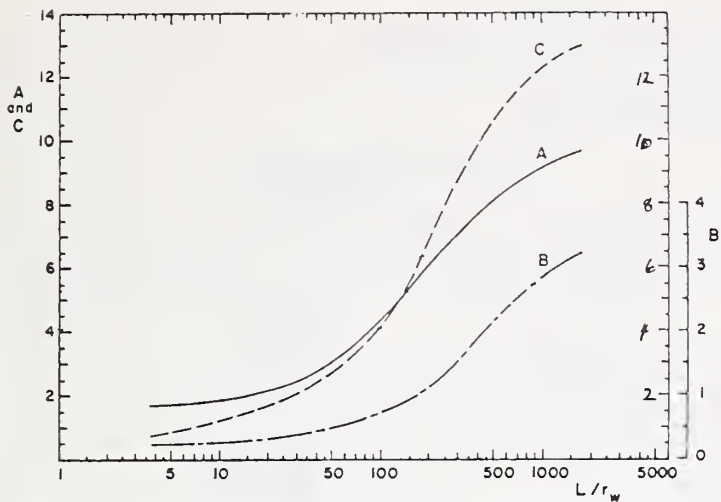


Figure 23. Curves relating coefficients A, B, and C to  $L/r_w$ .

2. From the semi-log plot of  $H/H_0$  vs  $t$ , determine the coordinates of  $t_L$ , the time lag, corresponding to  $H/H_0 = 0.37$  (fig. 21).

3. Determine the coefficient C (fig. 23) corresponding to value of  $L/r_w$  derived from the well construction data where  $L$  = screen length,  $r_w$  = well radius or radius of well plus the gravel pack.

4. Insert the coefficient C into the following equation to determine  $\ln R_e/r_w$ .

$$\ln R_e/r_w = \left[ \frac{1.1}{\ln H_w/r_w} + \frac{C}{L/r_w} \right]^{-1} \text{ (Bouwer and Rice 1976)}$$

where  $R_e$  = the effective radius of buildup,  $r_w$  = well radius or radius of well and aquifer pack (if known),  $L$  = screen length, and  $H_w$  = distance between the bottom of the well and the static ground water surface (see fig. 24 for the relation between  $H_w$ ,  $r_w$ ,  $L$ ).

5. Insert the values of time lag ( $t_L$ ),  $\ln R_e/r_w$ , and the well casing diameter into the following equation to determine  $K$  (for completely penetrating well).

$$K = \frac{d^2 \ln R_e/r_w}{8Lt} \text{ (Hvorslev 1951)}$$

where:

$d$  = well casing diameter

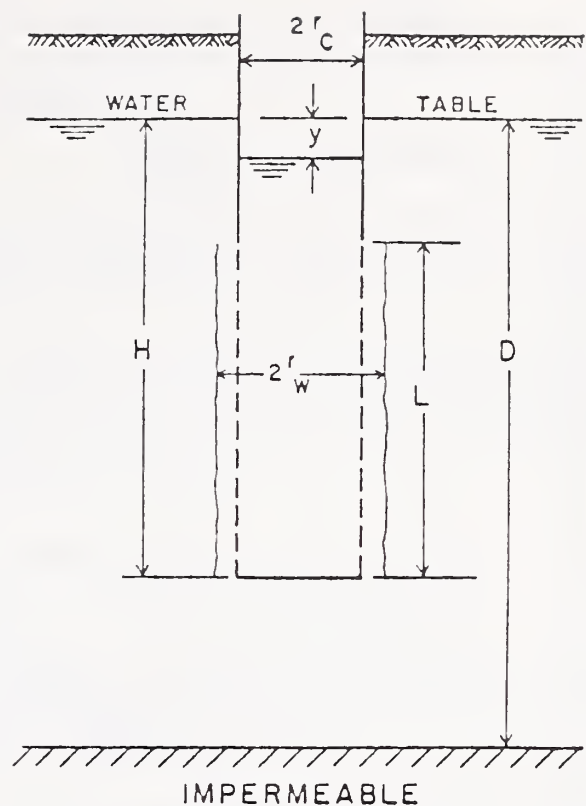


Figure 24. Geometry and symbols of a partially penetrating, partially perforated well in unconfined aquifer with gravel pack or developed zone around perforated section.

$\ln R_e/r_w$  = described in steps 3 and 4

$L$  = screen length

$t$  = time

$K$  = hydraulic conductivity.

### Example

Given the following well construction and slug test data, determine the hydraulic conductivity.

$d = 0.42$  ft,  $L = 20$  ft,  $r_w = 0.21$  ft,

$H_w = 94.08$  ft.

H(feet)	3.27	2.94	2.44	2.01	1.68	1.39
t(min)	0.5	1.0	2.0	3.0	4.0	5.0
H	1.24	0.96	0.81	0.68	0.56	0.38
t	6.0	7.0	8.0	9.0	10.0	12.0
H	0.18	0.12	0.08	0.05	0.03	0.02
t	16.0	18.0	20.0	25.0	26.0	30.0

A plot of  $H$  vs  $t$  is shown in fig. 22.  $H_0$  is determined by extrapolating the straight portion of this plot to time  $t=0$ . From fig. 22  $H_0 = 3.58$  ft.

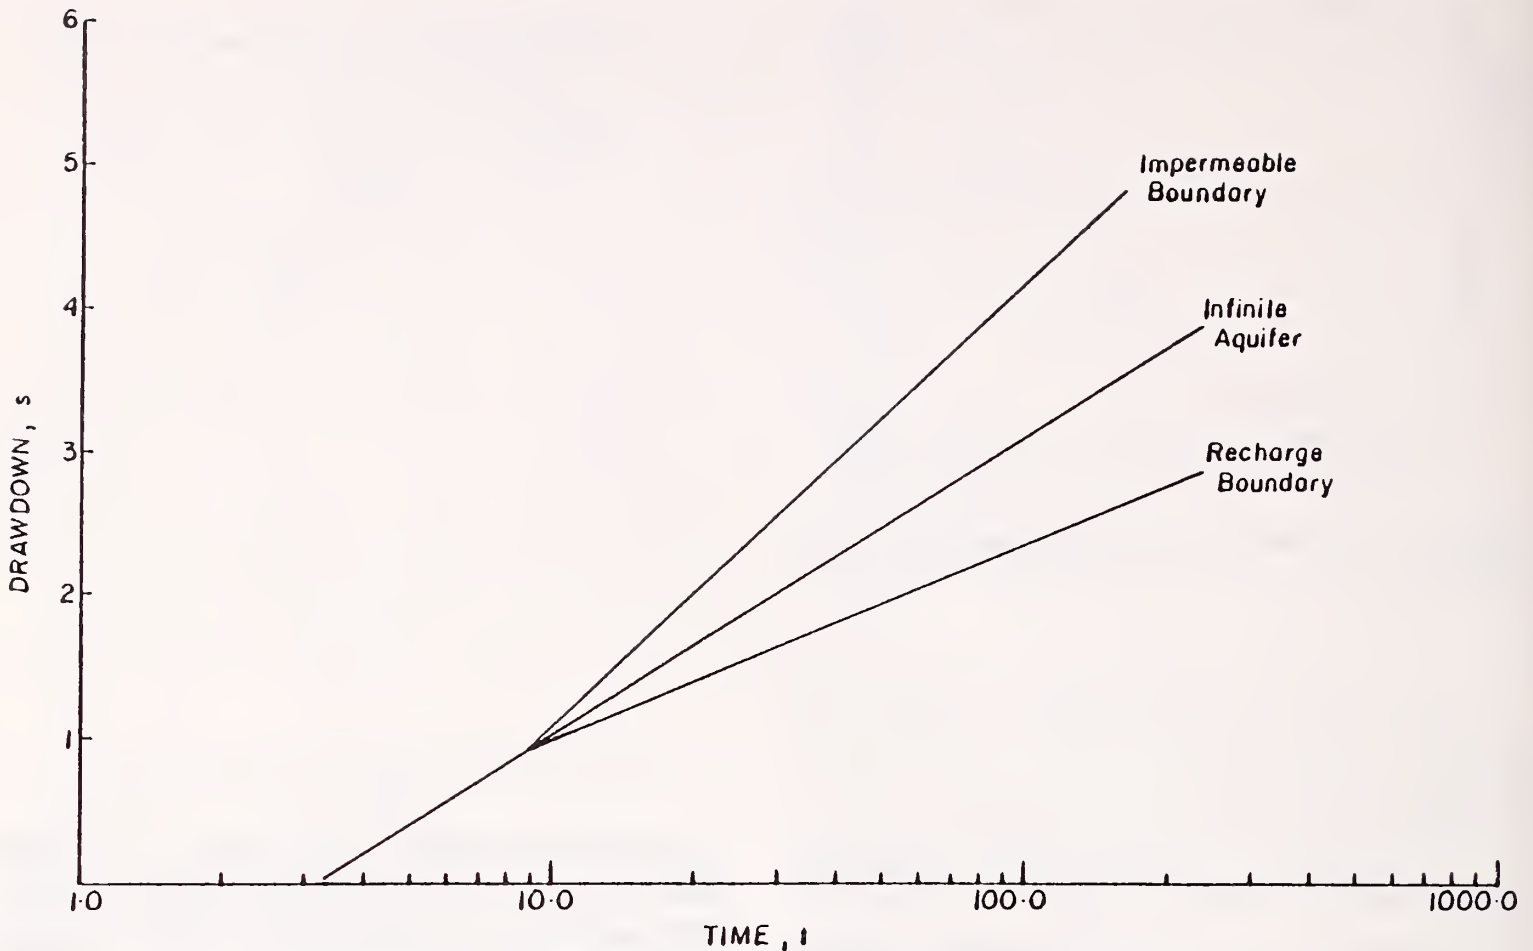


Figure 25. Effects of boundaries on drawdown vs time.

The time lag  $t_L$  is 5.5 min as shown in fig. 21. From fig. 22 the value of  $C$  corresponding to  $L/r_w = 95.2$  is  $\approx 4.25$ . From before

$$\begin{aligned} \ln R_e/r_w &= \left[ \frac{1.1}{\ln H_w/r_w} + \frac{C}{L/r_w} \right]^{-1} \\ &= \left[ \frac{1.1}{\ln 94.08/0.21} + \frac{4.25}{20/0.21} \right]^{-1} \\ &= 4.45. \end{aligned}$$

Therefore, the hydraulic conductivity is

$$\begin{aligned} K &= [d^2 \ln R_e/r_w] / 8Lt_L \\ &= [(0.42)^2 (4.45)] / [8(20)(5.25)] \\ &= 9.35 \text{ ft/min} = 1.35 \text{ ft/day}. \end{aligned}$$

Note:  $T = K \cdot b$  where  $T$  = transmissivity,  $K$  = hydraulic conductivity, and  $b$  = aquifer thickness. If the aquifer thickness is the same as the screen length ( $L=20$  ft), then the transmissivity is

$$T = K \cdot b = (1.35)(20) = 26.9 \text{ ft}^2/\text{day}.$$

## EFFECTS OF BOUNDARY CONDITIONS AND WELL CONSTRUCTION ON AQUIFER TEST RESULTS

Aquifer boundary conditions are rarely known at the field site prior to conducting the aquifer test. Any boundary effects must be recognized by the field investigator in order to avoid serious errors in the calculation of the aquifer parameters. Figures 25 and 26 illustrate the effect of recharge and impervious boundary conditions on the time-drawdown and distance-drawdown curves, respectively. The effects of these boundary conditions are summarized in table 23 (Johnson, Inc. 1974, p. 132). Recharge/boundary effects may be caused by nearby rivers or lakes, vertical infiltration from overlying zones, and increases in aquifer thickness or hydraulic conductivity. Impermeable boundary effects may be caused by geologic fault zones, decrease in aquifer thickness (pinch out), decrease in hydraulic conductivity, and impermeable bed-

**Table 23. – Comparisons of recharge and boundary effects on semilog diagrams**

**Recharge effect during pumping test**

**Time-drawdown graph**

1. Slope of graph becomes flatter. If transmissibility is calculated on the basis of the flatter slope it will be higher than the true value.
2. Extending straight line of flatter slope results in an erroneous value of  $t_0$  making it too low. A calculation using this figure gives a value for the storage coefficient that is smaller than the correct one.

**Distance-drawdown graph**

1. Slope of straight line remains almost unchanged. Aquifer transmissibility calculated from the graph is usually close to its true value.
2. Straight line is displaced upward. Extension to zero drawdown gives a value of  $r_0$  which when used to compute storage coefficient results in a value higher than the correct one.


**Boundary effect during pumping test**

**Time-drawdown graph**

1. Slope of graph becomes steeper. If transmissibility is calculated on the basis of the steeper slope it will be lower than the true value.
2. Extending line of steeper slope results in erroneous value of  $t_0$  which is too high. A calculation using this figure gives a storage coefficient that is larger than its correct value.

**Distance-drawdown graph**

1. Slope of straight line remains almost unchanged. Aquifer transmissibility calculated from the graph is usually close to its true value.
2. Straight line is displaced downward. Extension to zero drawdown gives erroneous value of  $r_0$  which makes calculated value of storage coefficient smaller than the correct one.

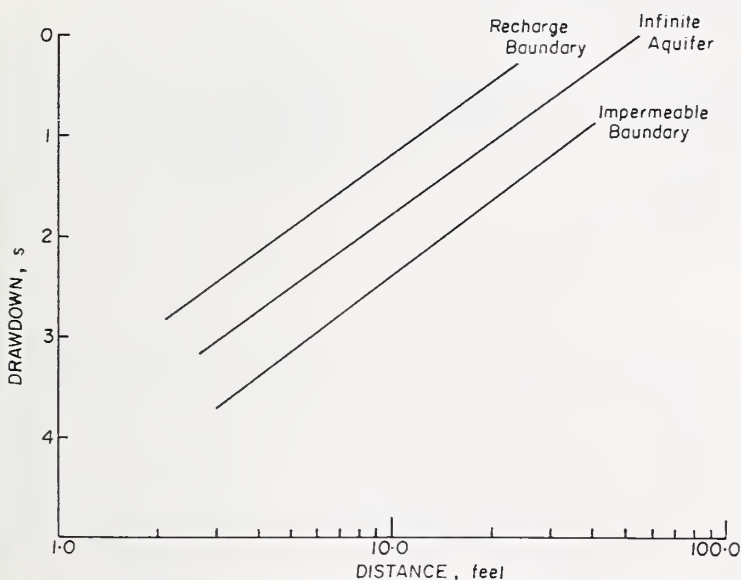

**Figure 26. Effects of boundaries on drawdown vs distance.**

rock. If boundary effects are apparent during the aquifer test, then the aquifer parameters must be determined from test data collected prior to the time the boundary effects are observable in the data.

Proper well construction is critically important if the aquifer test is to provide data representative of the aquifer. The following well design and construction factors contribute to excessive drawdown during the aquifer test (Johnson, Inc. 1974):

1. Well screens with insufficient open area.
2. Poor distribution of well screens.
3. Insufficient well screen length.
4. Inadequate well development.
5. Improper placement of the well screen.

Any one of these factors can significantly reduce the calculated values of transmissivity or hydraulic conductivity.

Example

Once the hydraulic coefficients are known, they can be used to estimate mine inflow and the extent to which the piezometric surface is disturbed. There are a variety of ways in which this can be accomplished that range from simple idealizations to application of sophisticated

Table 24. — Example of lateral inflow computation

Time	q	Q <sub>1</sub>	Q <sub>2</sub>	Q <sub>3</sub>	Q <sub>4</sub>	Q <sub>5</sub>	Q <sub>total</sub>
Years	ft <sup>3</sup> /ft-d	ft <sup>3</sup> /d					
.25	2.8	4200	—	—	—	—	4200
.50	2.0	3000	4200	—	—	—	7200
.75	1.6	2400	3000	4200	—	—	9600
1.00	1.4	2100	2400	3000	4200	—	11700
1.25	1.3	1950	2100	2400	3000	4200	13650
1.50	1.2	1800	1950	2100	2400	3000	11250
1.75	1.1	1650	1800	1950	2100	2400	9900
2.00	1.0	1500	1650	1800	1950	2100	9000
2.25	0.95	1425	1500	1650	1800	1950	8325

models. The following is an example when the relatively simple idealization of one-dimensional inflow to a pit is applicable.

The inflow to a mine pit that cuts through an aquifer is given by

$$q = 2(12t/S_{ya}Th_o^2)^{-1/2} + q_o$$

where:

q = inflow discharge per unit of pit length (both sides)

q<sub>o</sub> = natural flow in undisturbed aquifer per unit of pit length

t = time since inflow began

S<sub>ya</sub> = apparent specific yield

T = transmissivity

h<sub>o</sub> = initial saturated thickness of aquifer.

This equation is a special case of a more general result given by Bear (1972). The discharge predicted by this equation is the inflow discharge per unit of open pit. A mining plan is required to convert these values into actual discharges to be expected at any time. For example, suppose S<sub>ya</sub> = 0.05, T = 10 ft<sup>2</sup>/day, h<sub>o</sub> = 65 ft, q<sub>o</sub> = 0, and the mining plan calls for 1,500 ft of pit to be open every 3 months until a total pit length of 7,500 ft is achieved and the pit length is constant thereafter. Pit inflow as a function of time is computed by calculating the inflow from each segment of the pit, marking time for each segment from the time that the segment was opened. The contributions from each segment at

any time after the opening of the first segment are calculated by adding the contributions from each individual section. The computations are summarized in table 24. Q in this table is the discharge per unit of pit length (q) multiplied by the length of the open segment. The subscripts refer to the first, second, etc., segments of the pit. Q<sub>total</sub> represents the inflow from the total length of open pit at any time. The maximum inflow discharge is 13,650 ft<sup>3</sup>/day or about 70 gal/min in this example.

The theory leading to the above equation also provides a means for estimating the distance from the pit to points where the piezometric surface remains essentially undisturbed. The equation is

$$L = (3Tt/S_{ya})^{1/2}$$

where L is the distance from the pit to the point where the drawdown of the piezometric surface is zero. Using the same numbers for T and S<sub>ya</sub> as above, this equation predicts that inflow to the pit will cause the piezometric surface to be depressed to a distance of about 0.5 miles from the pit after 20 years.

The above equations and computations are presented to demonstrate one possible use of the hydraulic coefficients. Other uses exist and, certainly, there are many other ways to estimate pit inflow during mining. The above constitutes an example, not a recommendation.

*Effect of Abandoned Mine on Piezometric Surface.* — Another aspect that is sometimes im-

portant in premine planning and decision making is the extent to which the original piezometric surface will remain disturbed after the mine is abandoned. McWhorter and Rowe (1976) and Hamilton and Wilson (1977) provide approaches to this problem. McWhorter and Rowe (1976) idealize the abandoned mine area as a circle of radius  $R$  and area equal to the actual mined area. Their equation for the distance to which the postmining piezometric head is different from the premining value by an arbitrary amount is

$$r = \frac{R}{\sqrt{c}} \left( \left| \frac{K_o - K_i}{K_o + K_i} \right| \right)^{1/2}$$

where:

- $r$  = distance from the center of the mined area to points where postmining piezometric head is different from the premining value by an arbitrarily small fraction equal to  $c$ .
- $R$  = equivalent radius of the mined area.
- $c$  = ratio of the difference between premining and postmining values of piezometric head to the premining value.
- $K_o$  = hydraulic conductivity outside the mined area.
- $K_i$  = hydraulic conductivity inside the mined area.

Use of the above equation requires that both  $K_o$  and  $K_i$  are known. Prior to mining,  $K_i$  is not known. Nevertheless, the maximum distance can be estimated by putting  $K_i=0$  or  $K_i=\infty$  for which

$$r = R\sqrt{c}$$

For example, the distance to which the postmining piezometric head differs from the premining value by 10 percent if  $r = R/\sqrt{0.10} = 3R$ .

The analysis also permits one to establish other limiting values that may be of interest. For example, it is shown that the maximum width of the downstream plume of ground water of modified quality is  $4R$ . Also, postmining flow through the mined area can be no greater than twice the premining flow through the same area, regardless of how permeable the spoils are compared to the undisturbed aquifer.

The conditions under which the foregoing analyses are made are highly idealized relative to the conditions that can be expected to prevail in the field. The results should be expected to yield only order-of-magnitude estimates of the extent to which the long-term, postmining ground water flow differs from the premining condition. Hamilton and Wilson (1977) provide results similar to those discussed above for a variety of mine geometries.

## PUBLICATIONS CITED

- Acker, W. L.  
1974. Basic procedures for soil sampling and core drilling. Acker Drill Co., Inc., Scranton, Penn.
- Albertson, M. L., J. R. Barton, and D. B. Simons.  
1960. Fluid mechanics for engineers. 561 p. Prentice-Hall, Inc., Engelwood Cliffs, N.J.
- Anderson, K. E.  
1973. Water well handbook. 281 p. Missouri Water Well Drillers Association.
- Arora, H. S., J. B. Dixon, and L. R. Hossner.  
1978. Pyrite morphology in lignitic coal and associated strata of east Texas. *Soil Sci.* 125(3):151-159.
- Bailey, P. A.  
1968. Exploration methods and requirements in surface mining. Pfeider, E. P. (ed.), American Institute of Mining, Metallurgical, & Petroleum Engineers, Inc.
- Bean, R. T.  
1967. Planning and programming the ground water investigation in *Methods and techniques of ground water investigation and development*. United Nations Education, Scientific, and Cultural Organization, Water Resources Series No. 33, p. 53-71. United Nations, New York.
- Bear, J.  
1972. Dynamics of fluids in porous media. 764 p. Amer. Elsevier Publ. Co., Inc., New York.
- Begemann, H. K. S.  
1961. A new method for taking samples of great length. *Proc., Fifth Int. Conf. on Soil Mechanics and Foundation Engr., Paris*, vol. 1, p. 437-440.
- Begemann, H. K. S.  
1971. Soil sampler for taking an undisturbed sample 66 mm in diameter and a maximum length of 17 meters. *Proc. Speciality Session, Quality in Soil Sampling, Fourth Asian Conference, Int. Soc. Soil Mech. and Foundation Engr., Bangkok*, p. 54-57.
- Begemann, H. K. S.  
1974. The delft continuous soil sampler. *Bull. Int. Assoc. Engr. Geol.* No. 10, p. 35-37.
- Bishop, A. W.  
1948. A new sampling tool for cohesionless sands below ground water level. *Geotechnique*, vol. 1, p. 125-131.
- Black, C. A. (ed.).  
1965. Methods of soil analysis. Monogr. No. 9, Part I, Am. Soc. Agronomy, Madison, Wisc.
- Black, C. A. (ed.).  
1965. Methods of soil analysis. Monogr. No. 9, Part II, Am. Soc. Agronomy, Madison, Wisc.
- Blanchet, P. H., and C. I. Godwin.  
1972. "Geology system," for computer and manual analysis of geologic data from porphyry and other deposits. *Econ. Geol.* 67:796-813.
- Boast, C. W., and D. Kirkham.  
1971. Auger hole seepage theory. *Soil Sci. Soc. Am. Proc.* 35:365-374.
- Bond, L. O., R. P. Alger, and A. W. Schmidt.  
1971. Well log applications in coal mining and rock mechanics. *Trans. Soc. Mining Engr., AIME* 250:355-362.



- Bowen, H. J. M.  
1966. Trace elements in biochemistry. 241 p. Academic Press, New York.
- Breckenridge, R. M., G. B. Glass, F. K. Root, and W. G. Wendell.  
1974. Campbell Co., Wyoming-Geologic map atlas and summary of land, water, and mineral resources. Geol. Surv. Wyo., County Resour. Series No. 3.
- Broms, B. B., and A. Hallen.  
1971. Sampling of sand and moraine with the Swedish Foil Sampler. Proc., Specialty Session, Quality in Soil Sampling, Fourth Asian Conference, Int. Soc. Soil Mech. and Foundation Engr., Bangkok, p. 49-53.
- Campbell, M. D., and J. H. Lehr.  
1973. Water well technology. 681 p. McGraw-Hill Book Co., New York.
- Cannon, H. L., and H. C. Hopps.  
1972. Geochemical environment in relation to health and disease. Geol. Soc. Am. Spec. Pap. 140.
- Caruccio, F. T., J. C. Ferm, John Horne, Gwendelyn Giedel, and Bruce Baganz.  
1977. Paleoenvironment of coal and its relation to drainage quality. Environ. Protec. Tech. Ser., EPA-600/7-77-067, Nat'l. Environ. Res. Cent., Cincinnati, Ohio.
- Chapman, H. D. (ed.)  
1966. Diagnostic criteria for plants and soils. 499 p. Riverside Calif. Univ., Div. Agric. Sci.
- Chun, Dan.  
1978. Data bank for geologic field work (GEOBANK) and extension. Society of Mining and Engineering, p. 1320-1325.
- Connor, J. J., and H. T. Shacklette.  
1975. Background geochemistry of some rocks, soils, plants and vegetables in the conterminous United States. U.S. Geol. Surv. Prof. Pap. 574.
- Connor, J. J., J. R. Keith, and B. M. Anderson.  
1976. Trace-metal variation in soils and sagebrush in the Powder River Basin, Wyoming and Montana. U.S. Geol. Surv. Res. 4:49-59.
- Cooper, H. H., Jr., J. D. Bredehoeft, and I. S. Papadopoulos.  
1967. Response of a finite-diameter well to an instantaneous change of water. Water Resour. Res. 3(1):263-269.
- Cragg, J. B.  
1971. Advances in ecological research. Academic Press, New York.
- Dahl, A. R., and J. L. Hagmaier.  
1974. Genesis and characteristics of the southern Powder River Basin uranium deposits, Wyoming, U.S.A. In Formation of uranium ore deposits, p. 201-216. International Atomic Energy Agency, Vienna.
- Dames and Moore.  
1976. Development of premining and reclamation plan rationale for surface coal mines, volume I of III. The rationale for data acquisition. Prepared for U.S. Department of the Interior Bureau of Mines, Contract No. J0255002.
- Dames and Moore.  
1976. Development of premining and reclamation plan rationale for surface coal mines, volume II of III. Methods of data acquisition. Prepared for U.S. Department of the Interior Bureau of Mines, Contract No. J0255002.

Dames and Moore.

1976. Development of premining and reclamation plan rationale for surface coal mines, volume III of III. Legal controls of surface mining. Prepared for U.S. Department of the Interior Bureau of Mines, Contract No. J0255002.

Davis, J. F.

1973. A practical approach to uranium exploration drilling from reconnaissance to reserves. In Proceedings of a panel on uranium exploration methods. p. 109-123. International Atomic Energy Agency, Vienna.

Dollhopf, D. J., and others.

1978. Selective placement of coal stripmine overburden in Montana. III. Spoil mixing phenomena. Mont. Agric. Exp. Stn. Reclam. Res. Prog., Mont. State Univ., Bozeman. 68 p.

Ekstrom, T. K., A. Wirstam, and L. Larsson.

1975. COREMAP — a data system for drill cores and boreholes. *Econ. Geol.* 70:359-368.

Ferris, J. G., D. B. Knowles, R. H. Brown, and R. W. Stallman.

1962. Theory of aquifer tests. U.S. Geol. Surv. Water Sup. Pap. 1536E.

Ferris, J. G., and D. B. Knowles.

1963. The slug-injection test for estimating the coefficient of transmissibility of an aquifer. In Methods of determining permeability transmissibility and drawdown. U.S. Geol. Surv. Water Sup. Pap. 1536/I.

Freeze, R. A., and J. A. Cherry.

1979. Ground water. Prentice-Hall Inc., Englewood Cliffs, N.J.

Fukoka, M.

1969. General report of the symposium on soil sampling. Osaka, Japan. Paper 5, Special soil sampler used for sampling in the western Osaka area, by K. Komada and Y. Okayama. Proc. Spec. Session No. 1, 7th Int. Conf. Soil Mech. Foundation Engr., Mexico, p. 90.

Garber, M. S., and F. C. Kaopman.

1968. Methods of measuring water levels in deep wells. Techniques of water resources investigations of the U.S. Geol. Survey, Book 8, Ch. A-1, 23 p.

Godwin, C. I., R. E. Hindson, and P. H. Blanchet.

1977. GEOLOG: a computer-based scheme for detailed analysis of stratigraphy, especially as applied to data from drill holes in coal exploration and development. Coal Investigation Maps Bull., p. 123-132.

Goodman, R. E.

1976. Methods of geological engineering in discontinuous rocks. West Publishing Co., New York.

Groenewold, G. H.

1979. Hydrologic and hydrochemical characterization of selected stripmine spoils in western North Dakota. In Ecology in coal resource developments. M. K. Wali (ed.), Pergamon Press, New York.

Grube, W. E., Jr., R. M. Smith, E. M. Jencks, and R. N. Singh.

1972. Significance of weathering in a Pennsylvanian sandstone to pollution from strip mines. *Nature* 236 (5341):70-71.

Heath, R. C.

1976. Design of ground water level observation well program. *Ground Water J.* 14(2):71-77.

Hem, J. D.

1970. Study and interpretation of the chemical characteristics of natural water. U.S. Geol. Surv. Water Resour. Pap. No. 1973, 2nd ed., 363 p.

- Hemphill, D. D.  
1973. Trace substances in environmental health. Proc., 7th Missouri Univ. Annu. Conf. p. 83-87.
- Hinkley, T. K., R. J. Ebens, and J. G. Boerngen.  
1978. Overburden chemistry and mineralogy at Hanging Woman Creek, Big Horn County, Montana and recommendations for sampling at similar sites. U.S. Geol. Surv. Open-file Rep. 78-393.
- Hodgson, H. E. (ed.).  
1978. Proceedings of the second symposium on the geology of Rocky Mountain coal—1977. Colo. Geol. Surv. Resour. Ser. 4, 219 p.
- Hvorslev, M. J.  
1951. Time lag and soil permeability in ground water observation. Waterways Experiment Station, Bull. No. 36, U.S. Corps of Engineers, 50 p. Vicksburg, Miss.
- Huff, K. O., and A. D. Youngberg.  
1978. A cuttings sampling system for better geological evaluation. Unpubl. USFS-SEAM Study Rep. Thunder Basin National Grasslands, Campbell County, Wyo.
- Jenkins, J. C.  
1969. Practical applications of well logging to mine design. Am. Inst. Mining, Metallurg. and Petrol. Engr., Inc., preprint 69-F-73.
- Johnson Division UOP.  
1975. Ground water and wells, a reference book for the water-well industry. 440 p. Edward E. Johnson, Inc., St. Paul, Minn.
- Keefer, W. R., and R. F. Hadley.  
1976. Land and natural resource information and some potential environmental effects of surface mining of coal in the Gillette area, Wyoming. U.S. Geol. Surv. Circ. 743, 27 p.
- Korcak, R. F., and D. S. Fanning.  
1978. Extractability of cadmium copper, nickel, and zinc by double acid versus DTPA and plant content of excessive soil levels. J. Environ. Qual. 7:506-512.
- Kunkle, G. R.  
1965. Computation of ground water discharge to streams during floods or to individual reaches during base flow by use of specific conductance. U.S. Geol. Surv. Prof. Pap. 525-D.
- LeClerg, E. L., W. H. Leonard, and A. G. Clark.  
1962. Field plot technique. 373 p. Burgess Publ. Co., Minneapolis, Minn.
- LeRoy, L. W., D. O. LeRoy and J. W. Raese, (eds.)  
1977. Subsurface geology, petroleum, mining, construction. 941 p. Colorado School of Mines, Golden.
- Lindsay, W. L., and W. A. Norvell.  
1978. Development of a DTPA test for zinc, iron, manganese, and copper. Soil Sci. Am. J. 42:421-428.
- Mathews, A. L.  
1969. Some undisturbed soil sampling methods and procedures used by the U.S. Army Engineer Waterways Experiment Station. Proc. Spec. Session No. 1, 7th Int. Conf. Soil Mech. Foundation Engr., Mexico, p. 61-68.
- McKell, C. M., and Associates.  
1978. Rehabilitation potential for the Henry Mountain coal field. Bureau of Land Management, U.S. Department of the Interior, EMRIA Report No. 15, Denver Federal Center, Denver, Colo.

- McWhorter, D. B., and D. K. Sunada.  
1977. Ground water hydrology and hydraulics. 290 p. Water Resources Publications, Fort Collins, Colo.
- Melton, R. A., and J. C. Ferm.  
1978. Photo-book construction and computer-assisted procedures for assimilation and preparation of core data. In H. E. Hodgson. (ed.). Proceedings of the second symposium on the geology of Rocky Mountain coal - 1977. p. 143-148. Colo. Geol. Surv. Resource Series 4.
- Metcalf and Eddy, Inc.  
1972. Wastewater engineering. 782 p. McGraw-Hill, New York.
- Miesch, A. T.  
1976. Sampling designs for geochemical surveys — syllabus for a short course. U.S. Geol. Surv., Open-File Report 76-772, Denver, Colo., 140 p.
- Mills, T. R., and M. C. Clar.  
1976. Erosion and sediment control, surface mining in the eastern U.S. Environmental Protection Agency, Industrial Environmental Research Laboratory, Cincinnati, Ohio, EPA-625/3-76-006.
- Mitchell, R. L.  
1964. Trace elements in soil. In F. E. Baer (ed.). Chemistry of the soil. p. 320-368. Van Nostrand Reinholdt Co., New York.
- Moran, S. R., G. H. Groenewold, and J. A. Cherry.  
1978. Geologic, hydrologic and geochemical concepts and techniques in overburden characterization for mined-land reclamation. Rep. of Invest. No. 63, North Dakota Geol. Surv., 152 p.
- Neckers, J. W., and C. R. Walker.  
1952. Field test for active sulfides in soil. Soil Sci. 74:467-470.
- Norman, A. G.  
1968. Advances in agronomy. vol. 20. Academic Press, New York.
- Olson, G. W.  
1974. Land classifications in search agriculture. vol. 4, No. 7. Cornell Agru. Exp. Str., Ithaca, N.Y.
- Papadopulos, S. S., J. D. Bredehoeft, and H. C. Hilton, Jr.  
1973. On the analysis of 'slug test' data. Water Resour. Res. 9(4):1087-1089.
- Peters, W. C.  
1978. Exploration, mining, and geology. 696 p. John Wiley & Sons, New York.
- Pinder, G. F., and J. F. Jones.  
1969. Determination of the ground water component of peak discharge from chemistry of total runoff. Water Resour. Res. 5(2):438-445.
- Pirson, S. J.  
1970. Geologic well log analysis. 370 p. Gulf Publ. Co., Houston, Tex.
- Power, J. F., and F. M. Sandoval.  
1976. Effect of sampling method on results of chemical analysis of overburden samples. Mining Congr. J. 62(4):37-42.
- Prabhakarannair, K. P., and A. Cottenie.  
1969. A study of the plant uptake in relation to changes in extractable amounts of native trace elements from soil profiles using the Neubauer seedling method. Soil Sci. 108:74-78.
- Rainwater, F. H., and L. L. Thatcher.  
1960. Methods for collection and analysis of water samples. U.S. Geol. Surv. Water Sup. Pap. 1454, 301 p.

- Rowe, J. W., and D. B. McWhorter.  
1978. Salt loading in disturbed watershed field study. *J. Environ. Engr. Div., ASCE*, 104:323-338.
- Sandoval, F. M., and J. F. Power.  
1978. Laboratory methods recommended for chemical analysis of mined-land spoils and overburden in western United States. *USDA Agric. Handb. 525*. Washington, D.C.
- Schumm, S. A.  
1977. *The fluvial system*. 338 p. John Wiley & Sons, Inc., New York.
- Scott, J. H., and B. L. Tibbetts.  
1974. Well log techniques for mineral deposit evaluation: a review. U.S. Bureau of Mines, Information Circular B627, 45 p.
- Serota, S., and R. A. Jennings.  
1957. Undisturbed sampling techniques for sands and very soft clays. *Proc. 4th Int. Conf. Soil Mech. Foundation Engr. 1*:245-248.
- Simons, D. B., and Senturk.  
1977. *Sediment transport technology*. 807 p. Water Resources Publications, Fort Collins, Colo.
- Singh, M., and N. Singh.  
1978. Selenium toxicity in plants and its detoxification by phosphorus. *Soil Sci.* 126:255-262.
- Smith, R. M., W. E. Grube, Jr., T. Arkel, Jr., and Andrew Sobek.  
1974. Mine spoil potentials for soil and water quality. *Environ. Protec. Tech. Series, EPA-670/2-74-070*. 303 p. National Environmental Research Center, Cincinnati, Ohio.
- Smith, R. M., A. A. Sobek, T., Arkle, Jr., J. C. Sencindiver and J. R. Freeman.  
1976. Extensive overburden potentials for soil and water quality. *Environ. Protec. Tech. Series, EPA-600/2-76-184*. National Environmental Research Center, Cincinnati, Ohio.
- Soil conservation Service.  
1977a. Universal soil loss equation. *Tech. Note No. 50*, Denver, Colo.  
1977b. Guide for predicting wind erosion on nonirrigated croplands of Colorado. *Tech. Note, Agronomy No. 53*, Denver, Colo.  
1977c. Preliminary guidance for estimating erosion on areas disturbed by surface mining activities in the interior western United States. U.S. Environ. Protec. Agency, Region VIII, EPA-908/4-77-005, Denver, Colo.
- Soil Survey Staff.  
1951. *Soil survey manual*. USDA Agric. Handb. No. 18. Soil Conservation Service, Washington, D.C.
- Soil Survey Staff.  
1975. *Soil taxonomy*. USDA Agric. Handb. No. 436. Soil Conservation Service, Washington, D.C.
- Soil Survey Staff.  
1975. Revised soil survey manual, review draft. USDA Soil Conservation Service, Washington, D.C.
- Stallman, R. W.  
1971. Aquifer-test, design, observation and data analysis. *Techniques of water-resources investigations of the U.S. Geological Survey. Book 3, Ch. B-1*, 26 p.
- Stanford, G., and S. J. Smith.  
1978. Oxidative release of potentially mineralizable soil nitrogen by acid permanganate extraction. *Soil Sci.* 126:210-218.
- Swaine, D. J.  
1955. *The trace element content of soils*. *Tech. Commun. Bur. Soil Sci. No. 48*. 157 p. Horpenden, Great Britain.

- Telford, W. M., L. P. Geldart, R. E. Sheriff, and D. A. Keys.  
1977. Applied geophysics. 860 p. Cambridge Univ. Press, New York.
- Thorne, Ecological Institute.  
1975. Report on study identifying environmental issues and impacts of potential concern in the Fort Union Region arising from the development of a coal conversion complex. Prepared for Denver Research Institute.
- Tixier, M. P., and R. P. Alger.  
1970. Log evaluation of nonmetallic mineral deposits. *Geophysics* 35:124-142.
- Turekian, K. K., and K. H. Wedpohly.  
1961. Distribution of the elements in some major units of the earth's crust. *Geol. Soc. Am. Bull.* 72:175-192.
- U.S. Bureau of Reclamation.  
1974. Earth manual. Denver, Colo.
- U.S. Dep. of Interior.  
1977. Ground water manual. 480 p. Bureau of Reclamation, Engr. Res. Center, Denver, Colo.
- U.S. Environmental Protection Agency.  
1976. Quality criteria for water. EPA-440/9-76-023, 501 p. Washington, D.C.
- U.S. Salinity Laboratory Staff.  
1954. Diagnosis and improvement of saline and alkali soils. USDA Agric. Handb. No. 60. Washington, D.C.
- Van Voast, W.  
1978. Personal communication.
- Visocky, A. P.  
1970. Estimating the ground water component of storm runoff by the electrical conductivity method. *Ground Water* 8(2):5-10.
- Walton, W. C.  
1962. Selected analytical methods for well and aquifer evaluation. Illinois State Water Survey Bull. No. 49.
- Walton W. C.  
1970. Ground water resource evaluation. 664 p. McGraw-Hill, Inc., New York.
- Weller, J. M.  
1960. Stratigraphic principles and practice. 725 p. Harper & Bros., New York.
- Wilson, G.  
1969. The square tube in subsurface exploration. In Conference on In-situ Investigations in Soils and Rocks. p. 135-143. British Geotechnical Society, London.
- Winczewski, L. M.  
1978. Final report of the stratigraphic computer model of the coal-bearing formations: phases one and two. 178 p. Engineering Experiment Station, Univ. N.D., Grand Forks.
- Winczewski, L. M.  
1979. Progress report of the stratigraphic computer model of the coal-bearing formations: phase three. Bull. No. 79-01-EES-02, 30 p. Engineering Experiment Station, Univ. of N.D., Grand Forks.

Winczewski, L. M.

1979. Progress report UND 79-1: proposed GEOSTOR applications within SEAM's mine planning system. Bull. No. 79-01-EES-03, 14 p. Engineering Experiment Station, Univ. of N.D., Grand Forks.

Winterkorn, H. F., and H. Y. Fang.

1975. Foundation engineering handbook. Van Nostrand Reinhold Co., New York.

Wit, K. E.

1962. An apparatus for coring undisturbed samples in deep boreholes. Tech. Bull. 28. Wageningen, The Netherlands.

Wood, D. N. (ed.).

1973. Uses of earth science literature. 495 p. Butterworth & Co., London.

Zernitz, E. R.

1932. Drainage patterns and their significance J. Geol. 40:498-521.

# APPENDIX I

## SOURCES OF GEOLOGICAL, HYDROLOGICAL, SOILS, AND RECLAMATION DATA

Abstracts of North American Geology, monthly, 1966-1971. U.S. Geological Survey, Washington, D.C.

Agronomy Abstracts. Abstracts of papers presented at annual meetings. American Society of Agronomy. Madison, Wisconsin.

Annual summaries and/or yearbooks are published by most state geological surveys or bureaus.

Beatty, W. B.

1962. Mineral resources data in the western states. Stanford Research Institute, Palo Alto, California.

Black, C. A. (ed.).

1965. Methods of soil analysis, part 2. American Society of Agronomy Monograph No. 9.

Chemical Abstracts, weekly. American Chemical Society, Columbus, Ohio. (Topics include minerals, mining, geology, and specific metals.)

Chronic, J. B.

1958. Bibliography of theses written for advanced degrees in geology and related sciences at universities and colleges in the United States and Canada through 1957. Pruett Press, Boulder, Colorado.

Chronic, J. B.

1964. Bibliography of theses in geology, 1958-1963. American Geological Institute, Washington, D.C.

Czapowskyj, M. W.

1976. Annotated bibliography on the ecology and reclamation of drastically disturbed areas. USDA For. Serv. Gen. Tech. Rep. NE-21. Northeast For. Exp. Stn. Upper Darby, Pa.

Dalsted, N. L., and F. L. Leistritz.

1973. A selected bibliography on surface coal mining and reclamation of particular interest to the Great Plains states. Agric. Econ. Misc. Rep. 16. North Dakota Agric. Exp. Stn.

Dissertation Abstracts International, monthly.

University Microfilms, Ann Arbor, Michigan.

Earth Sciences Research Catalog.

University of Tulsa, Tulsa, Oklahoma. For the entire United States; indexed by area.

Economic Geology.

Geology of ore deposits (abstracts of Russian Academy of Science articles) in several issues each year.

Frawley, M. L.

1971. Surface mined areas. Control and reclamation of environmental damage. A bibliography. USDI Office of Library Services, Bibliography Series 27.



Geoabstracts, bimonthly.

University of East Anglia, Norwich, England.

With a worldwide geographical and subject index in seven parts:

- A. Landforms and the quaternary
- B. Climatology and hydrology
- C. Economic geography (including minerals)
- D. Social and historical geography
- E. Sedimentology
- F. Regional and community planning
- G. Remote sensing and cartography.

Geocom Bulletin/Programs, monthly.

Geosystems (Lea Associates), London. Abstracts and information on mathematical geology, exploration techniques, and computer methods in geoscience.

Geological Field Trip Guidebooks for North America.

1968. American Geological Institute, Washington, D.C.

Geochemical Abstracts, quarterly.

The Pergamon Press, Oxford, England. Successor to Rock Mechanics Abstracts. Combined in 1974 with issues of the International Journal of Rock Mechanics and Mining Sciences.

Geoscience Abstracts, 1959-1966, and Geological Abstracts, 1953-1958, of the American Geological Institute, Washington, D.C.

Geoscience Documentation.

1969—present. List of geoscience serials. Geoscience Documentation, v. 1, No. 1, July 1969. (The list has been updated in each subsequent monthly issue.)

Geotitles Weekly.

Geosystems (Lea Associates), London. (Cumulative in Geotitles Repertorium [annual] and on Geoarchives tapes.)

Gifford, G. F., D. D. Dwyer, and B. E. Norton.

1972. A bibliography of literature pertinent to mining reclamation in arid and semiarid environments. Environment and Man Programs, Utah State University, Logan.

Given, I. A.

1973. Sources of information. In Cummins, A. B., and I. A. Given, (eds.) SME mining engineering handbook: New York, Am Inst. Mining Metallur. Petroleum Engineers, v. 2, sec. 35, p. 35-1—35-34. (Lists departments of mines, geologic surveys, societies, institutes, and their publications, by country and by U.S. state. Also lists major periodicals, directories, and yearbooks.)

Hoy, R.

1975. Sources of information. In Lefond, S. J. (ed.) Industrial minerals and rocks. 4th ed. Am. Inst. Mining, Metallur, Petroleum Engineers, New York, p. 1290-1305. (Lists industrial minerals publications and publishers.)

Journal of Soil and Water Conservation, bimonthly.

Soil Conservation Society of America, Ankeny, Ohio.

Kaplan, S. R.

1965. Guide to information sources in mining, minerals, and geosciences. New York, Interscience Publishers, 599 p. (Part I lists names, addresses, function, and publications of national, state, and private associations dealing with mining; U.S. and foreign bureaus of mines are included; Part II describes available literature in books and journals by country and subject.)

- Long, H. K.  
1971. A bibliography of earth science bibliographies of the United States. American Geological Institute, Washington, D.C.
- Mineral Trade Notes, monthly.  
U.S. Bureau of Mines, Washington, D.C. (Includes news of developments in foreign mining areas.)
- Schaller, F. W., and Paul Sutton (eds.).  
1978. Reclamation of drastically disturbed lands. American Society of Agronomy, Madison, Wisc.
- Soil Science Journal, bimonthly.  
Soil Science Society of America, Madison, Wisc.
- The Minerals Yearbook, annually.  
U.S. Bureau of Mines, Washington, D.C. (Contains state and country summaries, with news of developments at major mines as well as commodity reviews.)
- U.S. Department of Agriculture.  
1954. Diagnosis and improvement of saline and alkali soils. USDA Agric, Handb. 60. Washington, D.C.
- U.S. Department of Agriculture.  
1975. Soil taxonomy. USDA Agric. Handb. 436. Soil Survey Staff, Washington, D.C.
- USDA Soil Conservation Service.  
Kinds of data available. Soil Interpretive Data, SCS-Form 5; Soil Survey Investigations Reports; County Soil Investigations Reports; County Soil Survey Reports. (Availability of the above types of information can be determined through state SCS offices.)
- Ward, D. C.  
1965. Bibliography of theses in geology. Geoscience Abstracts, v. 7, No. 12, pt. 1, p. 103-129.
- Ward, D. C.  
1973. Bibliography of theses in geology, 1967-1970. Geol. Soc, America Spec. Paper 143. Boulder, Colo.
- Ward, D. C., and T. C. O'Callaghan.  
1969. Bibliography of theses in geology, 1965-66. American Geological Institute. Washington, D.C.
- Ward, D. C. and M. W. Wheeler (eds.).  
1972. Geologic reference sources. In Metuchen, NJ, (ed.) The Scarecrow Press, 453 p. (Covers general information by country and state.)
- Wood, D. N. (ed.).  
1973. Use of earth science literature. Butterworth and Co. London, 459 p. (This could be called "everything you might possibly want to know about geologic information sources." Detailed information is included on methods of literature search, with lists of regional information by country and state.)

## APPENDIX II

# UNITED STATES — STATE GEOLOGICAL SURVEYS AND BUREAUS OF MINES FOR THE ROCKY MOUNTAIN REGION

Arizona Bureau of Mines  
Univ. of Arizona  
Tucson, Ariz. 85721

Colorado Geological Survey  
1845 Sherman St.  
Room 254  
Denver, Colo. 80203

Idaho Bureau of Mines and Geology  
Univ. of Idaho  
Moscow, Idaho 83843

Montana Bureau of Mines and Geology  
Montana College of Mineral Science and Technology  
Butte, Mont. 59701

New Mexico Bureau of Mines and Mineral Resources  
Socorro, N.M. 87801

North Dakota Geological Survey  
Univ. Station  
Grand Forks, N.D. 58202

South Dakota Geological Survey  
Science Center  
Univ. of South Dakota  
Vermillion, S.D. 57069

Utah Geological and Mineral Survey  
103 UGS Bldg.  
Univ. of Utah  
Salt Lake City, Utah 84112

Geological Survey of Wyoming  
Box 3008, Univ. Station  
Univ. of Wyoming  
Laramie, Wyo. 82071

## APPENDIX III

# CODES FOR ABBREVIATIONS AND SYMBOLS USED IN CONSTRUCTION OF LITHOLOGIC LOG (FIGURE 5 IN TEXT)

### BEDDING THICKNESS

- H - Homogeneous (no lamination)
- H - DM Homogeneous, distinctly mottled
- H - IM Homogeneous, indistinctly mottled
- L - Laminated - < 1 cm thick
- F - Thin bedded - 1-10 cm thick
- M - Medium bedded - 10-30 cm thick
- T - Thick bedded - 30-100 cm thick
- VT - Very thick bedded - > 100 cm thick
- L/F - Thin bedded sets of cross-lamination, etc.

### INDURATION

- U - Unconsolidated
- I - Indurated
- IP - Indurated but plastic
- IS - Indurated but shaly
- IF - Indurated but friable
- WI - Well indurated

### SORTING

- WS - Well sorted
- MWS - Moderately well sorted
- MS - Moderately sorted
- PS - Poorly sorted

### ROUNDNESS

- A - Angular
- S - Sub-rounded to sub-angular
- R - Rounded

### PERCENT LIMESTONE (SCALE OF 1-10)

- < 1 Trace of effervescence
- 1 Slight effervescence
- 3 Moderate effervescence
- 5 Strong effervescence
- 10 Very strong effervescence
- > 10 Limestone

## SAMPLE TYPE

- T.S. - Thin section sample
- S - Size sample
- X - X-ray analysis sample
- G - Growth study sample

## ROCK TYPE AND ACCESSORY SYMBOLS

(see chart A p. 104)

## SEDIMENTARY STRUCTURE SYMBOLS


(see chart B p. 105)

## DESCRIPTION

Color, size, sorting, rock type, Sedimentary Structure,  
Example: red, fine-grained, well sorted, sandstone, with horizontal laminations.

# CHART A

## ROCK TYPE SYMBOLS

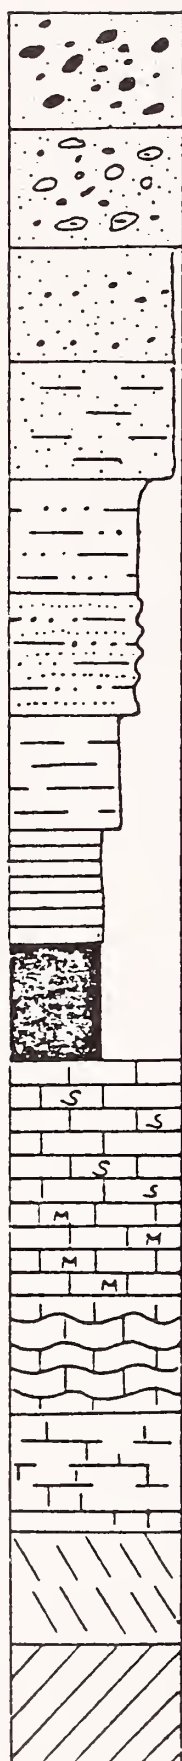

- conglomerate
- intraclastic conglomerate
- sandstone (with granule layers)
- clayey sandstone
- siltstone
- sandstone and siltstone
- mudstone
- claystone
- coal or peat
- limestone (sparry)
- micritic limestone
- algal limestone
- marlstone (clayey limestone)
- gypsum
- lost core

## ACCESSORY SYMBOLS

- ⊥ calcareous (> 3%)
- Ⓜ marcasite nodules
- Ⓟ pyrite nodule
- Ⓡ oxydized pyrite nodule
- ☞ plant fragments and carbonaceous matter
- pelletoids
- Ⓛ limonitic nodules
- \\\\ gypsum
- organic partings
- ⊖ clay gall intraclasts
- nodules
- ∨ glauconite
- Ⓞ megafossils
- ~ mica
- ▲ chert
- R oxydized colors (reddish)
- ▭ bentonite
- + feldspar
- clayey
- ⓕ iron oxide nodules
- Mn manganese

# CHART B

## SEDIMENTARY STRUCTURE SYMBOLS



- "structureless" sand
- interbedded sand and granule layers (horizontal bedding)
- large scale cross-bedding (tabular)
- low angle cross-bedding
- parallel bedding
- trough cross-bedding
- scours (with channel lag)
- scour and fill
- downcutting surface
- ripple-tabular x-lamination
- ripple-trough cross-lamination
- ripples in – drift
- ripples on crossbeds
- wavy bedding
- coarsely interlayered sand and mud



- alternating sand and mud
- flaser bedding
- wavy bedding
- lenticular bedding
- weak
- moderate – Bioturbation
- strong
- rooting
- microfaults
- contorted (slumped) beds
- growth faults
- bimodal current directions
- loadcasting
- mudcracks
- forset beds

# APPENDIX IV

## MANUFACTURERS AND DISTRIBUTORS

Listing of manufacturers and distributors who have been referred to in this report.

Acker Drill Company  
P. O. Box 830  
Scranton, Penn. 18501

Boyle Bros.  
P. O. Box 25068  
1624 Pioneer Road  
Salt Lake City, Utah 84125

Christensen Mining Products Division  
Christensen Diamond Products Company  
1937 South 300 West  
Salt Lake City, Utah 84115

Joy Manufacturing Company  
Montgomery Industrial Center  
Montgomeryville, Penn. 18936

Longyear Company  
925 Delaware Street, S.E.  
Minneapolis, Minn. 55414

Mobile Drilling Company, Inc.  
3807 Madison Avenue  
Indianapolis, Ind. 46227

Odgers Drilling, Inc.  
Ice Lake Road  
Iron River, Mich. 49935

Penndrill Manufacturing Division  
Pennsylvania Drilling Company  
P.O. Box 8562  
Pittsburgh, Penn. 15220

Pitcher Drilling Company  
75 Allemany Street  
Daly City, Calif. 94014

Reed Tool Company  
105 Allen Street  
P. O. Box 3641  
San Angelo, Texas 76901

Reese Sales Company  
P. O. Box 645  
2301 Gibson Street  
Bakersfield, Calif. 93302

Soiltest, Inc.  
2205 Lee Street  
Evanston, Ill. 60202

Sprague and Henwood, Inc.  
221 West Olive Street  
Scranton, Penn. 18501

Triefus Industries (W.A.) Co.  
Sidney, Australia

☆ U. S. GOVERNMENT PRINTING OFFICE: 1979-O-677-121/91



Barrett, James, Paul C. Deutsch, Frank G. Ethridge, William T. Franklin, Robert D. Heil, David B. McWhorter, Alv D. Youngberg

1979. Procedures recommended for overburden and hydrologic studies of surface mines. USDA For. Serv. Gen. Tech. Rep. INT-71, 106p Intermt. For. and Range Exp. Stn., Ogden, UT 84401.

---

Presents information on gathering and analyzing data regarding overburden and hydrologic studies of surface mines.

**KEY WORDS:** Hydrology, soils, overburden, core drilling, surface mining.



## THE SEAM PROGRAM

The Surface Environment and Mining Program, known as SEAM, was established by the Forest Service to research, develop, and apply new technology to help maintain a quality environment while helping meet the Nation's mineral requirements. SEAM is a partnership of researchers, land managers, mining industries, universities, and political jurisdictions at all levels.

Although the SEAM Program was assigned to the Intermountain Station, some of its research projects were administered by the Rocky Mountain and Pacific Southwest Research Stations.

